MATTHEWS

PRODUCT CATALOG Volume III







MATTERS

Matthews' fans achieve some of the highest efficiency ratings in the industry through:

- DC Motor technology allows for large, powerful blades which provide more robust airflow and ultra-quiet operation.
- Rotational fans reduce HVAC costs by mixing ambient air more thoroughly.
- Directional and Wall fans provide columnar airflow which can be customized.


Matthews does not field destroy

• 95% of damaged and defective materials are recycled or re-purposed.

Matthews achieves low defect rates because:

- All fans are visually inspected before shipping.
- All rotational and oscillating fans are bench tested before shipping.

MATTHEWS FAN COMPANY PRODUCTS

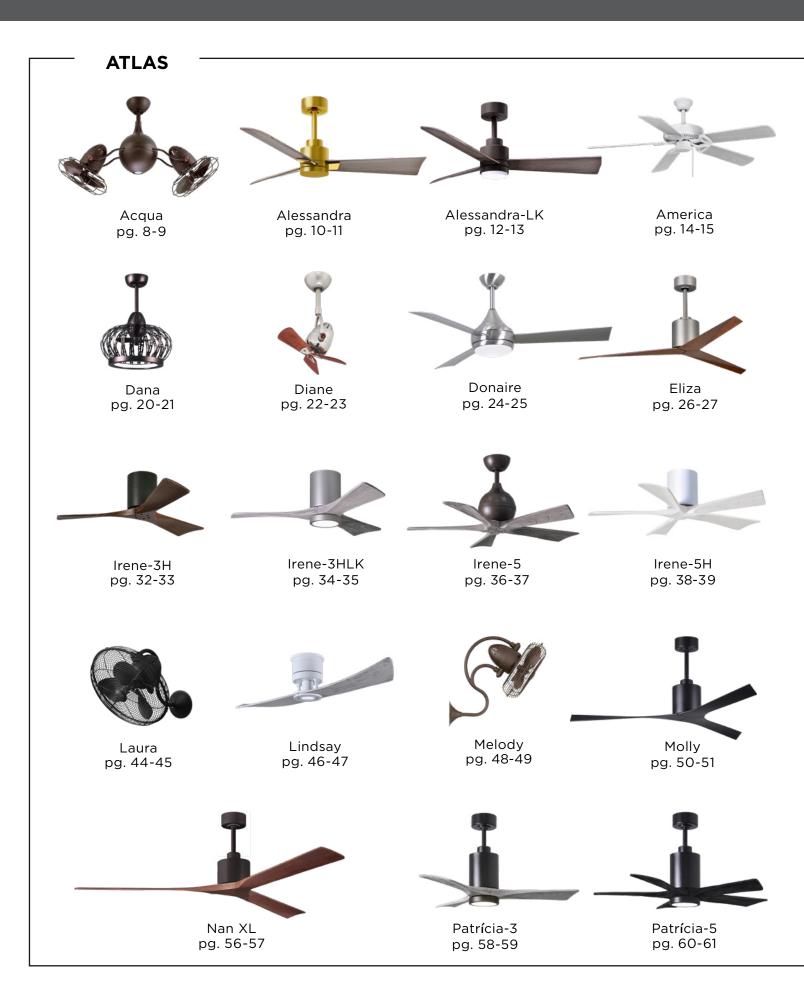

Dagny pg. 16-17 pg. 18-19



Eliza-H pg. 28-29

Irene-3 pg. 30-31



Irene-5HLK pg. 40-41



Kaye pg. 42-43



Mollywood pg. 52-53

Nan pg. 54-55



Super Janet pg. 62-63

MATTHEWS-GERBAR



Ar Ruthiane pg. 64-65



Bianca Direcional pg. 66-67



Brisa 2000 pg. 68-69



Bruna Parede pg. 70-71



Duplo-Dinamico pg. 72-73



Italo Ventania pg. 74-75



Jarold Direcional pg. 76-77



Michelle Parede pg. 78-79



Vent-Bettina pg. 80-81



The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.































60° Cathedral



ACQUA

FINISH AND BLADE OPTIONS		
SKU#	AQ-XX-XXXX (Model+Finish+Blade)	
Standard Finishes	Matte Black Textured Bronze	BK TB
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Weight	27 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths <i>Field cuttable.</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Overall Drop	16 inches / 41 cm + downrod length	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Metal with Guard Fan Diameter 39 inches / 99 cm 37 inches / 94 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Safety Cage or **Guard Options** No Cage Option Decorative Cage 721 / 1199 RPM (Low / High) 1040 / 1445 CFM (Low / High) 2750 / 4058 1825 / 3167 Watts (High) 101.25 80.50 CFM/Watt (High) 40.80 39.34 Blade Pitch 19° 31°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	GU10 LED	
Remote Dimmable	No	
Delivered Temperature in K	2969	
Delivered Lumens	337.30	
CRI	94	
Watts	5	
Hours	36,000	

Light kit longevity if used 6 Hours/Day: 16.5 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Slant ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse





Cathedral Celling Carlop



Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra is available in five different body finishes, seven blade options, and even an option with a CCT light kit as the Alessandra-LK. Suitable for wet locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra has a limited lifetime warranty.


















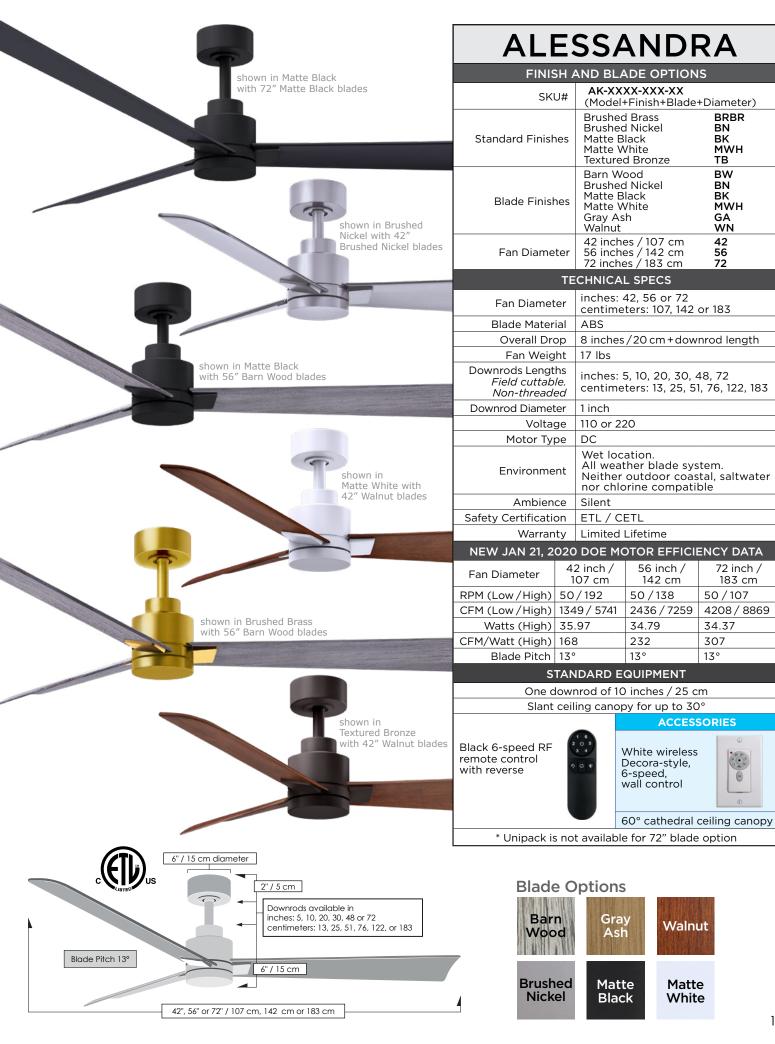




Minimal form with maximum efficiency. With a wide range of blade sizes, the Alessandra-LK can accommodate any space. This thoughtfully crafted and versatile fan will complement any aesthetic and improves the health and comfort of any room. Highly customizable, the Alessandra-LK is available in five different body finishes, seven blade options, and a dimmable 2700K-6500K CCT light kit. Suitable for damp locations. Backed by a limited lifetime warranty, our fans are of the highest quality and will dutifully perform for years to come. Constructed of cast aluminum and heavy stamped steel, the Alessandra-LK has a limited lifetime warranty.






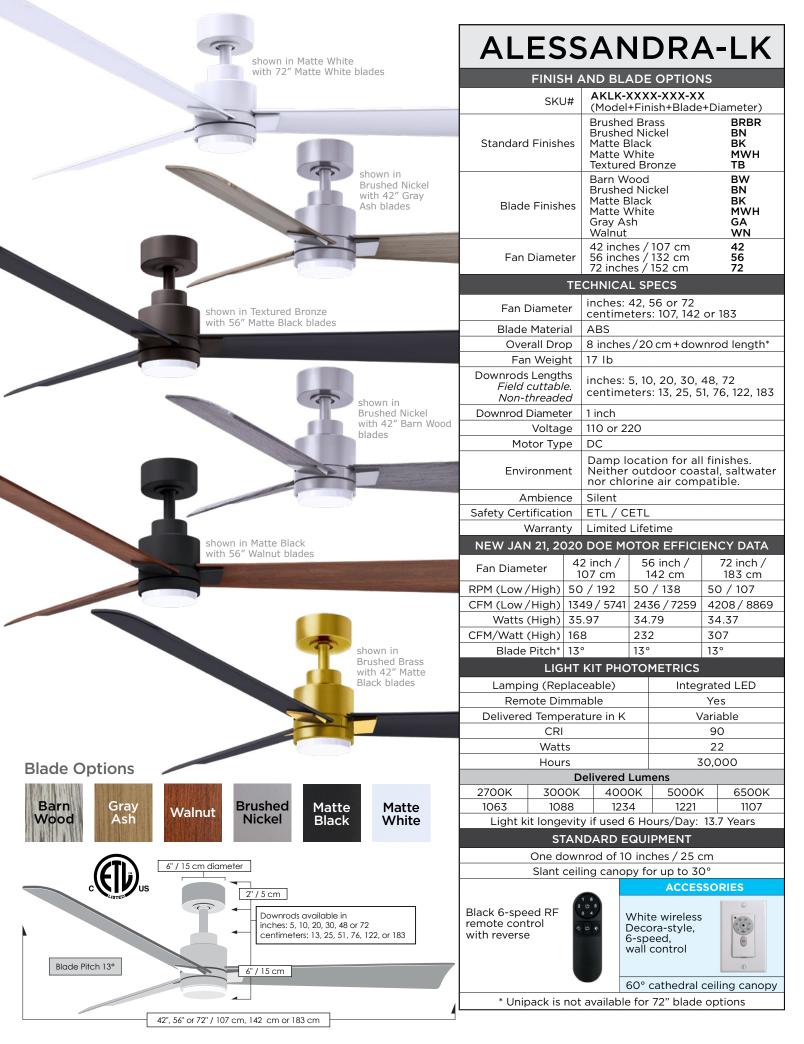



The America fan is a practical solution for both residential or commercial spaces with a more traditional aesthetic. It is available with either 42 or 52 inch diameters, along with an optional light kit. The blades are reversible as either white or light oak tone finish. The America carries a limited lifetime warranty.



USA

Applicability to Buy American Act:

Domestic Construction Materials Clause (Feb 2009): 52-225-9 (4)(2)(i). The cost of its components mined, produced, or manufactured in the United States exceeds 50 percent of the cost of all its components.

Breakdown of Origin of Materials:

Ceiling fan parts are made in Taiwan, a World Trade Organization Government Procurement Agreement country. Final assembly and UL 507 electrical compliance testing will be done in the US. US labor will be used in the assembly, handling and testing of this fan.

	ITEM	ORIGIN	% of COST of ITE	٧
BRISH	Fan Components	Taiwan	41.18%	
	U.S. Labor MFC Facility*	USA	34.46%	
	Domestic Shipping	USA	10.34%	
	International Shipping	USA	11.20%	
100	US Duty	USA	1.96%	
3000	Shipping Insurance	USA	0.88%	

 US labor cost includes, but is not limited to: hands-on assembly, packaging and warehousing.

Taiwan

Applicability to Buy American Act -Construction Materials Under Trade Agreements:

Construction Materials Under Trade Agreements:

Construction Materials Clause
(Aug 2009): 52-225-11 as prescribed in 25-1102. Ceiling

(Aug 2009): 52-225-11 as prescribed in 25-1102. Ceiling fan parts and assembly comprise a "WTO GPA country end-product."

Breakdown of Origin of Materials:

Ceiling fan is made in Taiwan, a World Trade Organization Government Procurement Agreement country.

ITEM Ceiling Fan Components/ Assembly Labor	ORIGIN Taiwan	% of COST of ITEM 74.59%
Shipping/ Handling / Insurance / Duty	USA	25.41%









LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	LED	
Delivered Temperature in K	3000	
Delivered Lumens	805 (x2)	
Watts	18 (x2)	
Hours 25,000		
Light kit longevity if used 6 Hours/Day: 11.4 Years		

AMERICA

FINISH AND BLADE OF HONS			
SKU#	AM-XX-XX-XX (Model+Diameter+Light)		
Light Kit	Without Light Kit Light Kit	NA LK	
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm	42 52	
TECHNICAL SPECS			
Fan Diameters	inches: 42 or 52 centimeters: 107 or 132		
Blade Material	MDF		
Overall Drops with both standard downrods: 3" and 9" without light kit and 3" downrod 19" without light kit and 9" downrods: 3" and 9" without light kit and 9" downrods: 3" and 9" without light kit and 9" downrods: 3" without light kit and 9" downrods: 3" without light kit and 3" downrod light kit and 3" downrods: 3" without light kit and 3" without light ki		ownrod	

downrods: 3" and 9"	25" with light kit and 9" downrod
Fan Weight	21 lbs
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Lead length	78"

110 or 220

172 mm x 14 mm

Voltage Motor Type

Motor size (3 speeds and forward/reverse)

Mounting Vaulted ceiling canopy for up to 29°

Control Pull-chain (Wall control available as accessory)

Available as accessory with X2 GU24 sockets and frosted glass bowl. LED lamps.

Ambience Silent


Safety Certification UL Listed - Dry Location


Warranty Limited Lifetime

One downrod of 3 inches / 8 cm
One downrod of 9 inches / 23 cm
Slant ceiling canopy for up to 30°

STANDARD EQUIPMENT

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA				
	With 3" Downrod	With 3" Downrod	With 9" Downrod	With 9" Downrod
	42 inch 107 cm	52 inch 132 cm	42 inch 107 cm	52 inch 132 cm
RPM (Low/High)	87 / 243	54 / 162	93 / 249	57 / 166
CFM (Low/High)	1488/4204	1313 / 4083	1419 / 4050	1699/4643
Watts (High)	60	64.67	61	59
CFM/Watt (High)	58	63.14	58	79
Blade Pitch	12°	12°	12°	12°

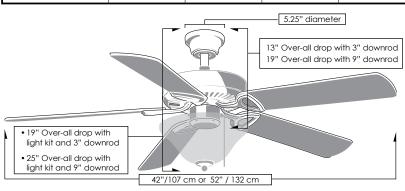

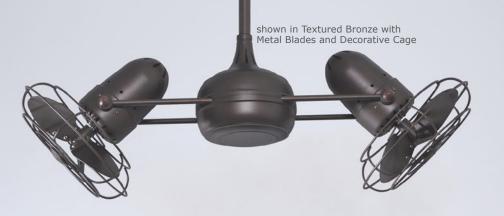



Dagny



The double-headed 360° rotational fan, Dagny, with cylindrical central housing and straight, parallel arms, is designed in the retrospective aesthetic. The Dagny offers smooth and quiet axial rotation. Its fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Dagny carries a limited lifetime warranty. The Dagny is also available with a light kit as the Dagny-LK.





















Product Features

A CONTRACTOR AND THE SAME OF THE



DAGNY FINISH AND BLADE OPTIONS DG-XX-XXXX SKU# (Model+Finish+Blade) **Textured Bronze** ТВ Standard Finish Matte Black BK Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black **WDBW** WD **Blade Styles WDBK** and Material Metal w/ Decorative Cage Metal w/ Safety Cage MTL **MSAF TECHNICAL SPECS** Fan Weight 22 lbs Voltage 110 (Contact us for 220 conversion) Motor Type Rotation Yes **Downrods Lengths** inches: 5, 10, 20, 30, 48, 72 Field cuttable, Non-Threaded centimeters: 13, 25, 51, 76, 122, 183 **Downrod Diameter** 1 inch Overall Drop 14 inches / 36 cm + downrod length Damp locations for all finishes Environment Neither coastal, saltwater nor chlorine compatible Ambience Soothing White Noise Safety Certification UL / CUL Limited Lifetime Warranty NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Metal with Guard Fan Diameter 41 inches / 104 cm 39 inches / 99 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Safety Cage or **Guard Options** No Cage Option Decorative Cage RPM (Low / High) 1012 / 1445 1035 / 1448 CFM (Low / High) 2565 / 4168 2199 / 3169 Watts (High) 87.26 80.69 CFM/Watt (High) 50 42 Blade Pitch 19° 31° STANDARD EQUIPMENT One downrod of 10 inches / 25 cm Slant ceiling canopy for up to 29° **ACCESSORIES** Black 3-speed RF remote control with reverse Decora-style, 3-speed, non-dimmable wall control 60° cathedral ceiling canopy



With clean, fluid lines, the Dagny LK 360° rotational fan is a striking centerpiece in any space. Its movement about its cylindrical center housing is smooth and quiet. Dagny LK's dual fan heads can be infinitely positioned in 180-degree arcs for optimum and customized air movement. As the angle between the fan heads and the horizontal support rods is increased, so does the speed of Dagny LK's axial rotation. Matthews rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed from cast aluminum and heavy stamped steel, the Dagny LK carries a limited lifetime warranty. This model is also available without a light kit as the *Dagny*.















Product Features













DAGNY LK

FINISH AND BLADE OPTIONS		
SKU# DGLK-XX-XXXX (Model+Finish+Blade)		
Standard Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB
Blade Styles and Material	Solid Wood / Barn Wood Solid Wood / Mahogany Solid Wood / Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage	WDBW WD WDBK MTL MSAF
TECHNICAL CDECC		

	TECHNICAL SPECS		
	Overall Drop	14 inches / 41 cm + downrod length	
Fan Weight		22 lbs	
	Voltage	110 (Contact us for 220 conversion)	
	Motor Type	AC	
	Rotation	Yes	
I FIGIR CLITTANIA I		inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
	Downrod Diameter	1 inch	
Environment		Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
	Ambience	Soothing White Noise	
	Safety Certification	UL / CUL	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Fan Head Options Solid Wood Fan Diameter 41 inches / 104 cm 39 inches / 99 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Guard Options No Cage Option Safety Cage or Decorative Cage RPM (Low / High) 757 / 1256 1069 / 1442

Warranty | Limited Lifetime

Guard Options	No Cage Option	Safety Cage or Decorative Cage	
RPM (Low / High)	757 / 1256	1069 / 1442	
CFM (Low / High)	2557 / 4171	1844 / 3067	
Watts (High)	87.36	80.50	
CFM/Watt (High)	50	39	
Blade Pitch	19°	31°	
LIGHT KIT PHOTOMETRICS			

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2969	
Delivered Lumens	523.7	
CRI	90	
Watts	18	
Hours	50,000	
	·	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Black 3-speed RF remote control with reverse




ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

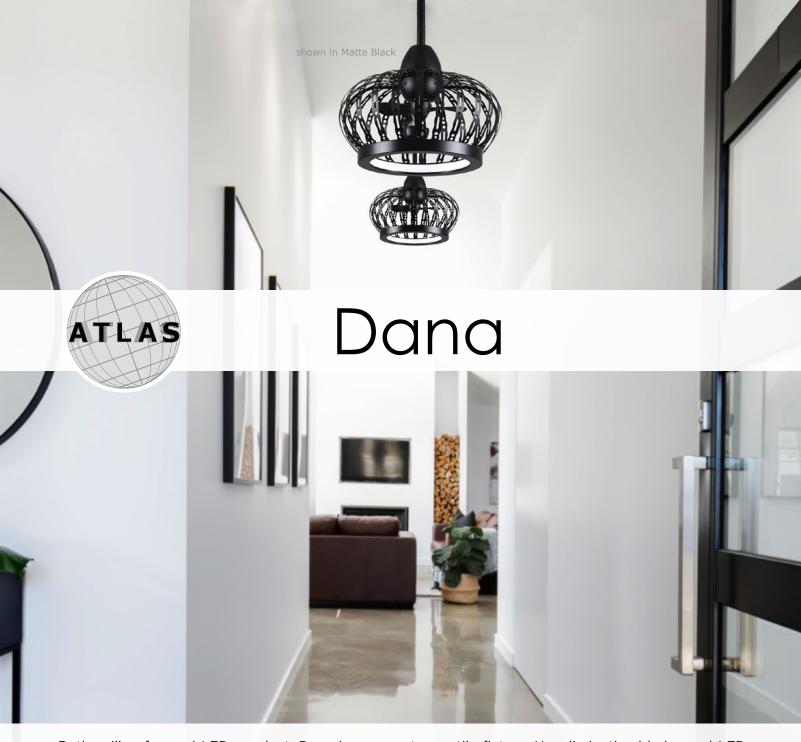

Both ceiling fan and LED pendant, Dana is our most versatile fixture. Her diminutive blades and LED light kit are concealed by intricate, organically inspired metal work finished in Matte Black, Matte White, Brushed Bronze, or Brushed Brass. Constructed of cast aluminum and heavy stamped steel, the Dana carries a limited lifetime warranty.



















60° Cathedral Ceiling Canopy




Product Features







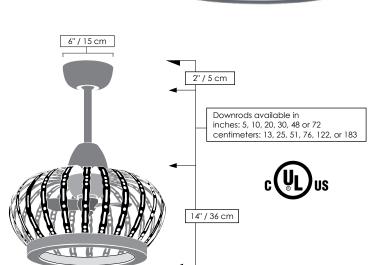

20" / 51 cm

DANA **FINISH AND BLADE OPTIONS** DM-XXXX SKU# (Model+Finish) BRBR **Brushed Brass** Standard **Brushed Bronze** BB **Finishes** Matte Black BK Matte White **MWH TECHNICAL SPECS** Fan Diameter 20 inches / 51 cm Blade Material Rubber 16 inches / 41 cm + downrod length Overall Drop Fan Weight 23 lbs Voltage 110 or 220 Motor Type **Downrods Lengths** inches: 5, 10, 20, 30, 48, 72 Field cuttable, centimeters: 13, 25, 51, 76, 122, 183 Non-Threaded **Downrod Diameter** 1 inch Damp locations for all finishes Neither coastal, saltwater nor Environment chlorine compatible Ambience Soothing White Noise Safety Certification UL / CUL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 1095 / 1666 CFM (Low / High) 691 / 1100 Watts (High) 32 CFM/Watt (High) Blade Pitch 31° LIGHT KIT PHOTOMETRICS Lamping (Replaceable) Integrated LED Remote Dimmable Yes Delivered Temperature in K 2923 **Delivered Lumens** 578 CRI 93.8 24 Watts Hours 49,000 Light kit longevity if used 6 Hours/Day: 22.4 Years STANDARD EQUIPMENT One downrod of 10 inches / 25 cm Vaulted ceiling canopy for up to 29° Light cover **ACCESSORIES**

Black 3-spee RF remote control with reverse




and a state

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

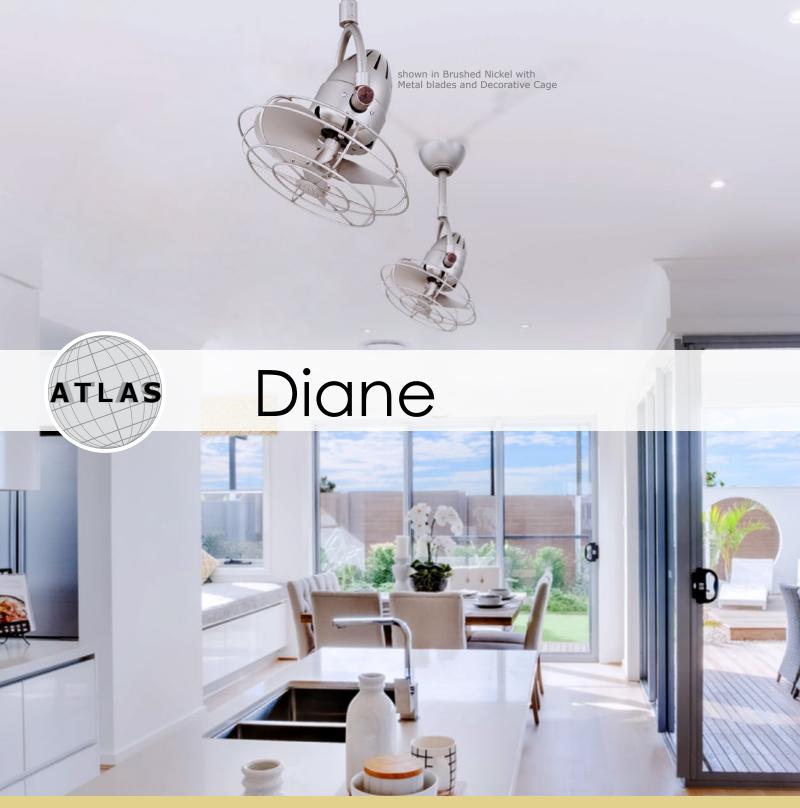

The Diane directional fan head provides maximum airflow with a sweeping 90° forward and reverse oscillation. The Diane can be hung in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Diane carries a limited lifetime warranty.



























DIANE				
FINISH	AND BI	_ADE OPT	IONS	
SKU#		-XXXX -l+Finish+Bla	ade)	
Standard Finishes	Brushe Matte Polishe	ed Nickel	<u> </u>	BN BK CR TB
Blade Styles and Material	Solid \ Solid \ Metal	Solid Wood/Barn Wood Solid Wood/Mahogany Solid Wood/Matte Black Metal w/ Decorative Cage Metal w/ Safety Cage MSAF		
TI		AL SPECS		
Fan Weight	12 lbs			
Voltage	110 or	220		
Motor Type	AC			
Oscillation	Yes			
Downrods Lengths Field cuttable. Non-threaded		: 5, 10, 20, 3 neters: 13, 25		
Downrod Diameter	1 inch			
Overall Metal Blades	14 inch	nes / 36 cm	+ downre	od length
Drop Wood Blades		nes / 30 cm		
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible			
Ambience	Soothi	ng White N	oise	
Safety Certification	ETL /	CETL		
Warranty		d Lifetime		
NEW JAN 21, 202	O DOE N	10TOR EFF	ICIENC	Y DATA
Fan Head Options	Sol	id Wood	Metal w	ith Guard
Fan Diameter	16 inch	ies/41 cm	13 inche	es / 33 cm
Fan Blade Diameter	16 inch	es / 41 cm		es / 33 cm
Guard Options	No Cag	ge Option	or Safet	
RPM (Low / High)	865 /		900 / 1	
CFM (Low / High)	1441 / 51.37	∠15∠	1068 / 46.14	1545
Watts (High) CFM/Watt (High)	44		31	
Blade Pitch	19°		31°	
		EQUIPMEN		
		10 inches/2		
		nopy for up		
Black 3-speed RF remote control			CESSOR	IES O
		60° cathe	dral ceilin	ng canony
		_ JO Catriet	arai ceiill	ig carlopy



of entirely 316 marine grade stainless steel, the Donaire carries a limited lifetime warranty.




































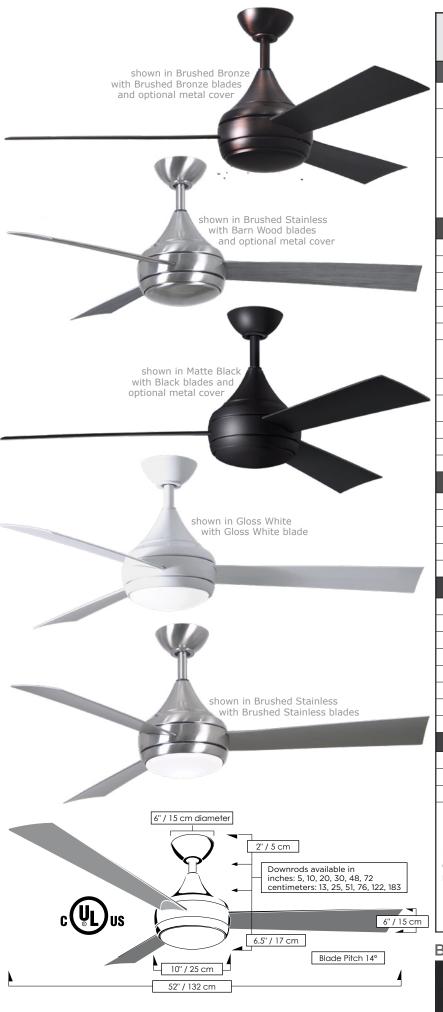

DONAIRE

FINISH AND BLADE OPTIONS		
SKU#	DA-XX-XX (Model+Finish+Blac	de)
Standard Finishes	Matte Black Brushed Bronze Brushed Stainless Gloss White	BK BB BS WH
Blade Finish	Black Barn Wood Tone Brushed Bronze Brushed Stainless Gloss White	BK BW BB BS WH
TECHNICAL SPECS		

	TECHNICAL SPECS			
	Fan Diameter	52 inches / 132 cm		
	Blade Material	ABS		
	Overall Drop	8.5 inches/22 cm +downrod length		
	Fan Weight	29 lbs		
	Voltage	110 or 220		
	Motor Type	AC		
	Downrods Lengths Field cuttable, Non-Threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
	Downrod Diameter	1 inch		
•	Environment	Coastal and wet locations All weather blade system		
	Ambience	Silent		
	Safety Certification	UL / CUL		
	Warranty	Limited Lifetime		
	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			

RPM (Low / High)	55 / 172
CFM (Low / High)	1775 / 6013
Watts (High)	58.62
CFM/Watt (High)	111
Blade Pitch	14°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3017	
Delivered Lumens	725	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 29°

Light cover

Black 3-speed RF remote control with reverse



ACCESSORIES

Decora-style, 3-speed, non-dimmable wall control



60° cathedral ceiling canopy

Blade Options



Brushed Stainless




Gloss White



Designed by Chicago architect Stephen Katz in 2013, the wet location Eliza blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza has a limited lifetime warranty.



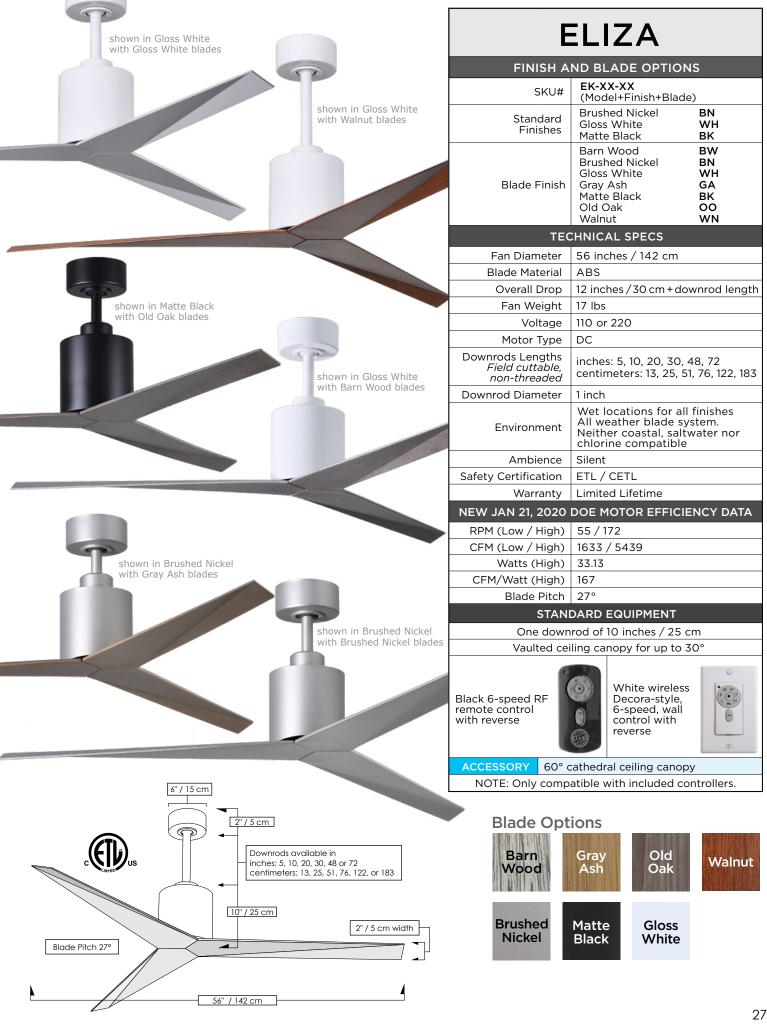




Designed by Chicago architect Stephen Katz in 2014, the Eliza-H ceiling-mount fan blends a beautiful technically derived form with superior function and movement. The unique blade shape is designed to maximize air movement at the outer edge of the blade. The result is more efficient air velocity rings, less blade drag and greater motor optimization. Equally important is Eliza-H's stationary visual statement which combines modern utility with minimalist geometry. Constructed of cast aluminum and heavy stamped steel, the Eliza-H has a limited lifetime warranty.





ELIZA-H FINISH AND BLADE OPTIONS **EKH-XX-XX** SKU# (Model+Finish+Blade) **Brushed Nickel** BN Standard Gloss White WH **Finishes** Matte Black BK BW Barn Wood **Brushed Nickel** BN Gloss White WH Blade Finish Gray Ash GΑ Matte Black BK Old Oak 00 Walnut WN **TECHNICAL SPECS** Fan Diameter 56 inches / 142 cm Blade Material ABS Overall Drop 10 inches / 25 cm Fan Weight 14 lbs Voltage 110 or 220 Motor Type Damp locations for all finishes Environment Neither coastal, saltwater nor chlorine compatible Ambience Silent ETL / CETL Safety Certification Limited Lifetime Warranty NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 52 / 175 1123 / 4034 CFM (Low / High) Watts (High) 33.49 CFM/Watt (High) 122 Blade Pitch 27° STANDARD EQUIPMENT White wireless Decora-style, 6-speed, wall control with reverse NOTE: Only compatible with included controllers. **Blade Options** Old Gray Ash Walnut Oak Matte **Gloss Black** White

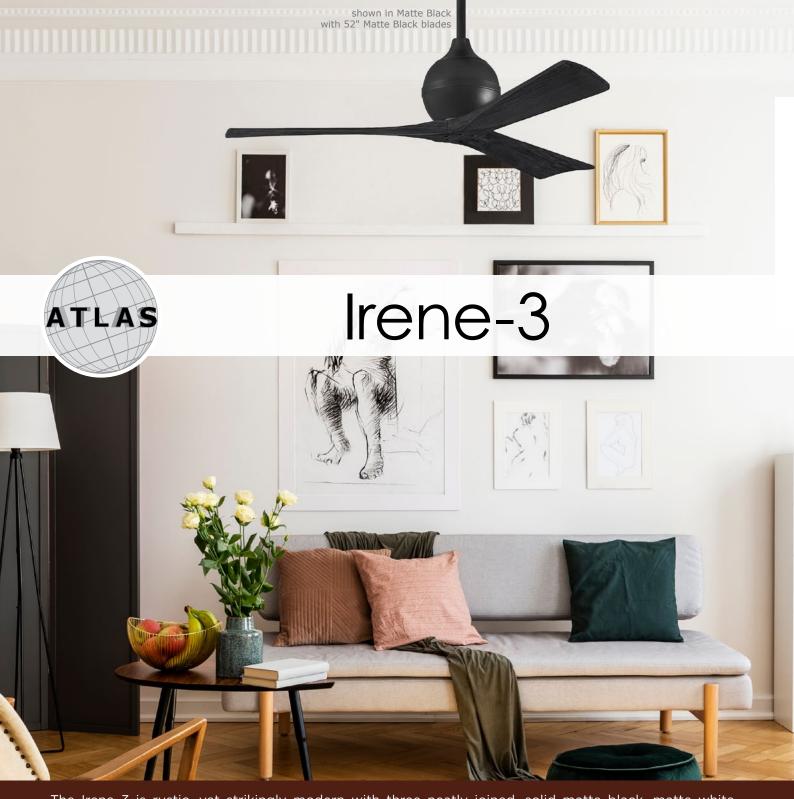

The Irene-3 is rustic, yet strikingly modern with three neatly joined, solid matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-3 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3 has a limited lifetime warranty.





















The Irene-3H ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3H has a limited lifetime warranty.







The Irene-3HLK ceiling-mount fan is rustic, yet strikingly modern with three neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-3HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-3HLK has a limited lifetime warranty.





IRENE-3HLK

FINISH AND BLADE OPTIONS

SKU#	IR3HLK-XXXX-XXX-XX (Model+Finish+Blade+Di	ameter)
Standard Finishes	Barn Wood Brushed Brass Brushed Bronze Brushed Nickel Brushed Pewter Light Maple Gloss White Matte Black Polished Chrome Textured Bronze Walnut	BW BRBR BB BN BP LM WH BK CR TB WN
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS

Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches/30 cm
Fan Weight	12 lbs
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent
Safety Certification	ETL / CETL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA 42 inch / 52 inch / 60 inch /

Fan Diameter	107 cm	132 cm	152 cm
RPM (Low/High)	50 / 232	51 / 212	51 / 152
CFM (Low/High)	701 / 3573	1057 / 5047	1783 / 5878
Watts (High)	17.61	32.49	30.81
CFM/Watt (High)	168	149	191
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS

Lamping (Replaceable)	Integrated LED
Remote Dimmable	Yes
Delivered Temperature in K	3075
Delivered Lumens	690
CRI	90
Watts	16
Hours	60,000

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



NOTE: Only compatible with included controllers.

Blade Options





Matte White





The Irene-5 is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A spherical motor housing complements its minimal profile. Irene-5 is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5 has a limited lifetime warranty.




















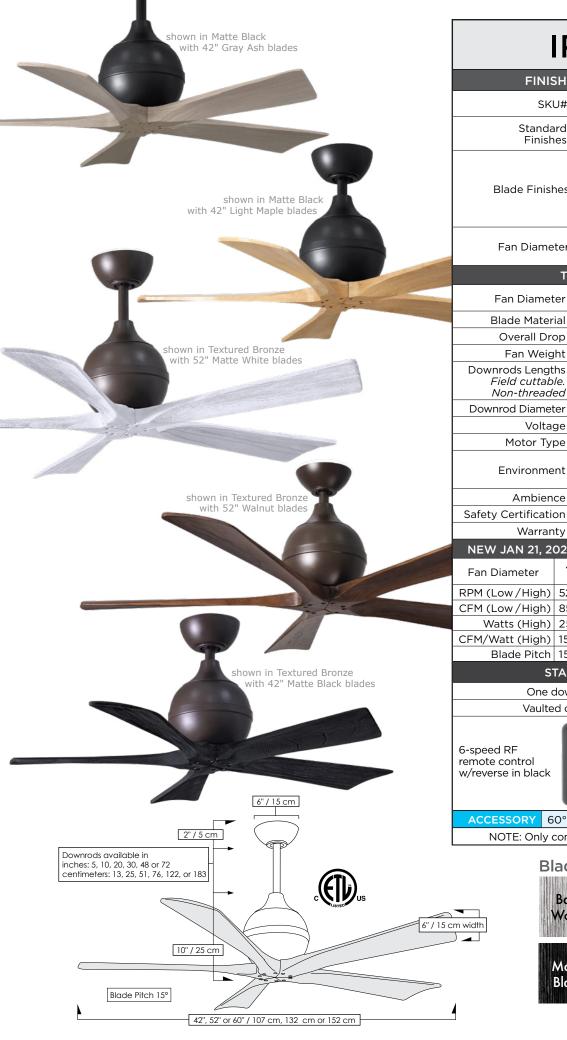

IRENE-5

FINISH AND BLADE OPTIONS		
SKU#	IR5-XX-XXX-XX (Model+Finish+Blade+D	Diameter)
Standard Finishes	Matte Black Textured Bronze	BK TB
Blade Finishes	Barn Wood Tone Gray Ash Light Maple Matte Black Matte White Walnut Tone	BW GA LM BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

	60 inches / 152 cm 60
TE	CHNICAL SPECS
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152
Blade Material	CNC Cut Solid Wood
Overall Drop	12 inches/30 cm +downrod length
Fan Weight	18 lbs
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Voltage	110 or 220
Motor Type	DC
Environment	Damp locations for all finishes. Neither coastal, saltwater nor chlorine compatible.
Ambience	Silent

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA 52 inch / 60 inch / 42 inch / Fan Diameter 107 cm 132 cm 152 cm RPM (Low / High) 52 / 229 51 / 156 52 / 77 CFM (Low/High) 852 / 4261 1784 / 5783 3328 / 5006 Watts (High) 25.33 32.18 31.38

ETL / CETL Limited Lifetime

Warranty

CFM/Watt (High) 150 179 175 Blade Pitch 15° 15° 15°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Vaulted ceiling canopy for up to 30°

6-speed RF remote control w/reverse in black



Wireless Decora-style. 6-speed, wall control in white



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options









Matte White






The Irene-5H ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood, matte black, matte white, gray ash, light maple, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5H is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5H has a limited lifetime warranty.





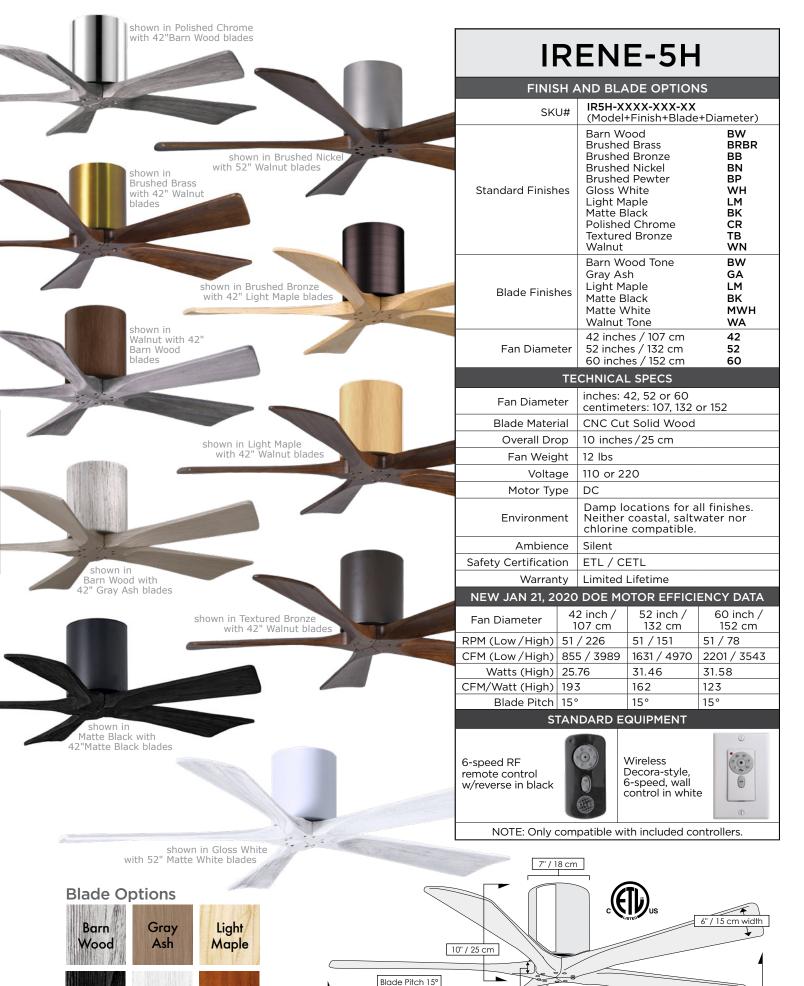

Matte

Black

Matte

White

Walnut

2" / 5 cm

42", 52" or 60" / 107 cm, 132 cm or 152 cm



The Irene-5HLK ceiling-mount fan is rustic, yet strikingly modern with five neatly joined, solid wood matte black, matte white, walnut, or barn wood tone blades. A cylindrical motor housing complements its minimal profile. Irene-5HLK is streamline while still appearing warm and natural. Constructed of cast aluminum and heavy stamped steel, the Irene-5HLK has a limited lifetime warranty.





IRENE-5HLK

FINISH A	AND BLADE OPTIONS
SKI I#	IR5HLK-XXXX-XXX-XX

SKU#	IR5HLK-XXXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Barn Wood Brushed Brass Brushed Bronze Brushed Nickel Brushed Pewter Light Maple Gloss White Matte Black Polished Chrome Textured Bronze Walnut	BW BRBR BB BN BP LM WH BK CR TB WN
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	12 inches/30 cm	
Fan Weight	13 lbs	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

1000	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			ENCY DATA
	Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm
	RPM (Low/High)	51 / 220	51 / 179	51 / 88
	CFM (Low/High)	861 / 4215	1212 / 4749	2116 / 3660
	Watts (High)	31.66	31.12	30.78
	CFM/Watt (High)	127	150	132
	Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

Light Cover

6-speed RF remote control w/reverse in black



Wireless Decora-style, 6-speed, wall control in white



NOTE: Only compatible with included controllers.

Blade Options





Matte White





The beautiful Kaye 3-speed versatile-mount, wall or ceiling fan, oscillates left to right, forward and reverse, in a 90° sweep. Its design is reminiscent of vintage train cabin ventilators of yester-year, and will cool down your favorite space with poise and determination. Kaye's profile is low, however its strength and character define it. Kaye can be mounted in any small or awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of your favorite space. Constructed of cast aluminum and heavy stamped steel, the Kaye carries a limited lifetime warranty.





























KAYE

FINISH AND BLADE OFFIONS		
SKU#	KC-XX (Model+Finish)	
Finishes	Brushed Nickel Matte Black Polished Chrome Textured Bronze Gloss White	BN BK CR TB WH
TECHNICAL SPECS		

	GIOSS WITHLE WITH	
TECHNICAL SPECS		
Fan Weight	10.5 lbs	
Blade Material	Metal / ABS	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	Yes	
Fan Diameter	13 inches / 33 cm	
Fan Height	13 inches / 33 cm	
Fan Projection	17.5 inches / 44 cm	
Ceiling Mount Overall Drop	17.5 inches / 44 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Blade Pitch	31°	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Soothing White Noise	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 1213 / 1445 CFM (Low / High) 868 / 1303 Watts (High) 47.68 CFM/Watt (High) 29 Blade Pitch 31°

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

White Decorastyle, 3-speed wall control



Black 3-speed RF remote control



Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



The Laura 3-speed, left-to-right 90 degree oscillating wall fan offers the best in function. Its patented design boasts a whisper-quiet DC motor, remote control operation and easy 2-wire installation. Compact and powerful, Laura can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of heating, ventilation or air conditioning. Constructed of cast aluminum and heavy stamped steel, Laura carries a limited lifetime warranty.

Product Features

























LAURA

FINISH AND BLADE OPTIONS		
SKU#	LL-XX (Model+Finish)	
Finishes	Brushed Nickel Matte Black Textured Bronze	BN BK TB

TECHNICAL SPECS			
Fan Weight	12 lbs		
Blade Material	Metal / ABS		
Voltage	110 - 240		
Motor Type	DC		
Oscillation	Yes		
Fan Diameter	16 inches / 41 cm		
Fan Height	14.5 inches / 37 cm		
Fan Projection	19.5 inches / 50 cm		
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling		
Fan Guard	Safety Cage		
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1231 / 1520		
CFM (Low / High)	1056 / 1600		
Watts (High)	28.1		
CFM/Watt (High)	56.94		
Blade Pitch	31°		

STANDARD EQUIPMENT


Safety cage Side-mounted wall junction box

Black 3-speed RF remote control

Note:

- Two-wire system required to operate the oscillation mechanism independent of the fan blades.
 Three-wire system not needed.
- 2) Receiver already hidden in motor canopy.







ATLAS Lindsay



The Lindsay ceiling fan offers a simple, yet refined air flow solution to any space. The two elegant, solid wood blades quietly circulate air as they revolve around an understated central motor housing. Integrated into the design is an eco-friendly, dimmable LED light kit which will provide illumination for decades to come. The Lindsay is available in matte black, matte white and textured bronze finishes. Blade finish options are barn wood, matte black, matte white or walnut. Constructed of cast aluminum and heavy stamped steel, Lindsay carries a limited lifetime warranty.

Product Features



















LINDSAY FINISH AND BLADE OPTIONS LW-XXX-XXX SKU# (Model+Finish+Blade) Matte Black BK Standard MWH Matte White Finishes **Textured Bronze** TB Barn Wood вw Matte Black BK Blade Finish **MWH** Matte White Walnut WN **TECHNICAL SPECS** Fan Diameter 52 inches / 132 cm Blade Material CNC Cut Solid Wood 12 inches / 30 cm Overall Drop Fan Weight 11 lbs Voltage 110 (Please contact us for 220V) Motor Type Damp locations for all finishes Environment Neither coastal, saltwater nor chlorine compatible Ambience Silent Safety Certification ETL / CETL Warranty Limited Lifetime NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA RPM (Low / High) 51 / 220 CFM (Low / High) 1097 / 4955 Watts (High) 29.61 CFM/Watt (High) 166 Blade Pitch 45° LIGHT KIT PHOTOMETRICS Integrated LED Lamping (Replaceable) Remote Dimmable

Light kit longevity if used 6 Hours/Day: 16.9 Years

STANDARD EQUIPMENT

Black 6-speed RF remote control with reverse



Delivered Temperature in K

Delivered Lumens

CRI Watts

Hours

White wireless Decora-style, 6-speed, wall control



Yes


2940

557 93.7


17

37,000

NOTE: Only compatible with included controllers.

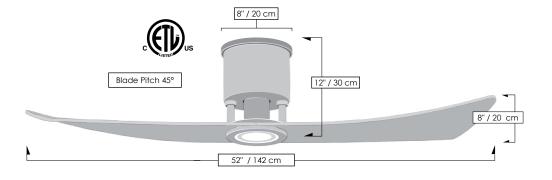

Blade Options



Matte White





The oscillating Melody, 3-speed wall-mounted fan, designed in the Art Nouveau style with a grand, arching gooseneck, provides maximum multi-directional airflow with its 90° left to right sweep. Melody can be mounted in small, awkward spaces or in front of HVAC ducts to improve the efficiency of the heating, ventilation or air conditioning of any space. Constructed of cast aluminum and heavy stamped steel, the Melody carries a limited lifetime warranty.





























MELODY

FINISH AND BLADE OPTIONS SKU# ME-XX (Model+Finish)

BK

ТВ

Finishes Matte Black
Textured Bronze

TECHNICAL SPECS		
Fan Weight	14 lbs	
Blade Material	Metal / ABS	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	Yes	
Fan Diameter	13 inches / 33 cm	
Fan Height	20 inches / 51 cm	
Fan Projection	20 inches / 51 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Soothing White Noise	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1213 / 1495	
CFM (Low / High)	868 / 1303	
Watts (High)	47.68	
CFM/Watt (High)	27.32	
Blade Pitch	31°	

STANDARD EQUIPMENT

Safety cage

Side-mounted wall junction box

Decora-style, 3-speed wall control in white



Black 3-speed RF remote control



Note:

- 1) A three-wire system is needed to operate the oscillation mechanism independent of the fan blades.
- The remote control receiver will not fit behind the wall canopy. A clever electrician will need to hide the receiver in wall or ceiling according to code.



contemporary look perfect for any room or décor. Available in gloss white or matte black finish, Molly will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, the Molly carries a limited lifetime warranty.

Product Features


































shown in Matte Black

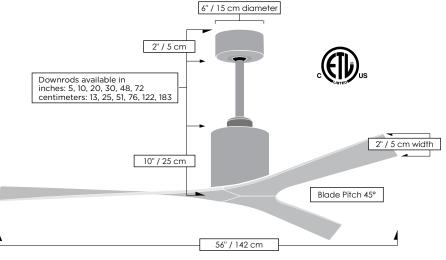

MOLLY

	110221		
	FINISH AND BLADE OPTIONS		
	SKU#	MK-XX (Model+Finish)	
	Standard Finishes	Gloss White WH Matte Black BK	
	TEC	CHNICAL SPECS	
	Fan Diameter	56 inches / 142 cm	
	Blade Material	ABS	
	Overall Drop	12 inches/30 cm+downrod length	
	Fan Weight	17 lbs	
ê	Voltage	110 (Please contact us for 220V)	
	Motor Type	DC	
	Downrods Lengths Field cuttable, non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
	Downrod Diameter	1 inch	
	Environment	Wet locations for all finishes All weather blade system. Neither coastal, saltwater nor chlorine compatible	
	Ambience	Silent	
	Safety Certification	ETL / CETL	
	Warranty	Limited Lifetime	
	NEW JAN 21, 2020	DOE MOTOR EFFICIENCY DATA	
	RPM (Low / High)	49 / 116	
	CFM (Low / High)	1556 / 3530	
	Watts (High)	29.96	

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse

CFM/Watt (High)

Blade Pitch | 45°



White wireless Decora-style, 6-speed, wall control



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options



Gloss White



Designed by Chicago architect Stephen Katz in 2018, the Mollywood ceiling fan combines modern organic geometry with outstanding performance and function. The blade shape was developed using advanced computer software which allowed the design to achieve a complex form. The result is a clean, natural and contemporary look perfect for any room or décor. Available in matte black, matte white, or textured bronze finishes with either barn wood, matte black, matte white or walnut tone solid wood blade options. Mollywood will complement a variety of design styles while also providing a fresh and unique, modern statement. Constructed of cast aluminum and heavy stamped steel, Mollywood carries a limited lifetime warranty.























Nan



Designed by Chicago architect Stephen Katz, the Nan ceiling fan is a contemporary take on traditional fan design with superior performance and functionality. The Nan fan feels at home in any room or setting from casual to formal and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the larger Nan XL for larger spaces.



















NAN

FINISH AND BLADE OPTIONS		
SKU#	NK-XXX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Matte Black Matte White Textured Bronze	BRBR BK MWH TB
Blade Finish	Barn Wood Gray Ash Light Maple Matte Black Matte White Walnut	BW GA LM BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	12 inches/30 cm + downrod length	
Fan Weight	18 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

	NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA				
Contract of the last	Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm	
-	RPM (Low/High)	53 / 235	51 / 202	51 / 152	
	CFM (Low/High)	941 / 5101	1692 / 7389	2454 / 8251	
	Watts (High)	20.37	32.61	32.58	
	CFM/Watt (High)	213	220	256	
	Blade Pitch	15°	15°	15°	

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.

Blade Options





Designed by Chicago architect Stephen Katz, the Nan XL ceiling fan is a revolutionary take on ceiling fans, incorporating traditional design with superior performance and functionality to meet the aesthetic needs and challenges of any space. The Nan XL fan feels at home in any setting from casual to commercial and everything in between. This timeless ceiling fan works in residential environments, restaurants, hospitality or even office settings. The Nan XL fan has the perfect amount of design presence for any size room or season. The fully adjustable fan motor speeds makes moving the right amount of air simple and easy. The Nan XL fan will feel like a natural part of the room and enhance any space with a fresh breeze. Also available is the standard Nan fan with smaller diameter options: 42", 52" and 60".









A complement to any commercial or residential space, the Patrícia-3 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-3 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-3 carries a limited lifetime warranty.

Product Features





















PATRÍCIA-3

FINISH AND BLADE OPTIONS		
SKU#	PA3-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BRBR BN CR TB WH BK
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS			
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152		
Blade Material	CNC Cut Solid Wood		
Overall Drop	14 inches/36 cm + downrod length		
Fan Weight	19 lbs		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183		
Downrod Diameter	1 inch		
Voltage	110 or 220		
Motor Type	DC		
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible		
Ambience	Silent		
Safety Certification	ETL / CETL		
Warranty	Limited Lifetime		

NEW SAIT 21, 2020 BOE MOTOR ET TICIENCT BATA				
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm	
RPM (Low/High)	52 / 232	51 / 219	51 / 156	
CFM (Low/High)	860 / 4286	1283 / 6077	2113 / 6833	
Watts (High)	16.60	32.03	31.72	
CFM/Watt (High)	211	182	219	
Blade Pitch	15°	15°	15°	
LIGHT KIT PHOTOMETRICS				

NEW IAN 21 2020 DOF MOTOR FEEICIENCY DATA

EIGHT KIT PHOTOMETRICS				
Lamping (Replaceable)	Integrated LED			
Remote Dimmable	Yes			
Delivered Temperature in K	3075			
Delivered Lumens	690			
CRI	90			
Watts	16			
Hours	60,000			
Light kit longevity if used 6 Hours/Day: 27.4 Years				

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm $\,$

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



CCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.



ATLAS

Patrícia-5



A complement to any commercial or residential space, the Patrícia-5 seamlessly combines innovation with simple, refined design. Its elegant aesthetic belies its robust construction. Solid wood walnut, matte black, matte white, or barn wood tone blades revolve around a balanced, cylindrical DC motor housing. Air is circulated efficiently with barely more than a whisper. An eco-conscious LED light kit completes the package, making Patrícia-5 sophisticated, efficient and green. Constructed of cast aluminum and heavy stamped steel, the Patrícia-5 carries a limited lifetime warranty.

Product Features





















60° Cathedral



PATRÍCIA-5

FINISH AND BLADE OPTIONS		
SKU#	PA5-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Brass Brushed Nickel Polished Chrome Textured Bronze Gloss White Matte Black	BRBR BN CR TB WH BK
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WA
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	14 inches/36 cm +downrod length	
Fan Weight	19 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 or 220	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA				
Fan Diameter	42 inch / 107 cm	52 inch / 132 cm	60 inch / 152 cm	
RPM (Low/High)	53 / 221	51 / 186	51 / 87	
CFM (Low/High)	917 / 4386	1398 / 5524	3247 / 5547	
Watts (High)	30.47	31.80	31.64	
CFM/Watt (High)	137	170	194	
Blade Pitch	15°	15°	15°	

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	3075	
Delivered Lumens	690	
CRI	90	
Watts	16	
Hours	60,000	

Light kit longevity if used 6 Hours/Day: 27.4 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Vaulted ceiling canopy for up to 30°

Light cover

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control with reverse



ACCESSORY 60° cathedral ceiling canopy

NOTE: Only compatible with included controllers.



The Super Janet's remarkable design and solid construction in cast aluminum and heavy stamped steel make it the heroine in any commercial or residential space. Moving air with barely a whisper, its efficient DC motor turns solid wood blades in walnut, matte black, matte white, or barn wood tones. An ecoconscious LED light kit with light cover completes the package. Sophisticated, efficient and green, Super Janet carries a limited lifetime warranty.

























SUPER JANET

FINISH AND BLADE OPTIONS		
SKU#	SJ-XX-XXX-XX (Model+Finish+Blade+Diameter)	
Standard Finishes	Brushed Nickel Gloss White Matte Black Textured Bronze	BN WH BK TB
Blade Finishes	Barn Wood Tone Matte Black Matte White Walnut Tone	BW BK MWH WN
Fan Diameter	42 inches / 107 cm 52 inches / 132 cm 60 inches / 152 cm	42 52 60
TECHNICAL SPECS		

TECHNICAL SPECS		
Fan Diameter	inches: 42, 52 or 60 centimeters: 107, 132 or 152	
Blade Material	CNC Cut Solid Wood	
Overall Drop	12 inches/30 cm + downrod length	
Fan Weight	17 lbs	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	1 inch	
Voltage	110 (Contact us for 220 conversion)	
Motor Type	DC	
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible	
Ambience	Silent	
Safety Certification	ETL / CETL	
Warranty	Limited Lifetime	

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA			
Fan Diameter	42 inch / 107 cm*	52 inch / 132 cm*	60 inch / 152 cm
RPM (Low/High)	50 / 242	50 / 184	50 / 150
CFM (Low/High)	915 / 4530	1571 / 5962	2293 / 6495
Watts (High)	23.62	32.99	33.32
CFM/Watt (High)	173	180	205
Blade Pitch	15°	15°	15°

LIGHT KIT PHOTOMETRICS		
Lamping (Replaceable)	Integrated LED	
Remote Dimmable	Yes	
Delivered Temperature in K	2776	
Delivered Lumens	419	
CRI	94	
Watts	18	
Hours	50,000	

Light kit longevity if used 6 Hours/Day: 22.8 Years

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Vaulted ceiling canopy for up to 30°

Black 6-speed RF remote control with reverse



White wireless Decora-style, 6-speed, wall control



ACCESSORY 60° cathedral ceiling canopy NOTE: Only compatible with included controllers.



The Ar Ruthiane's unique hourglass support arms grasp bullet-shaped motor housings which rotate 360° about its teardrop center. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.

Product Features


























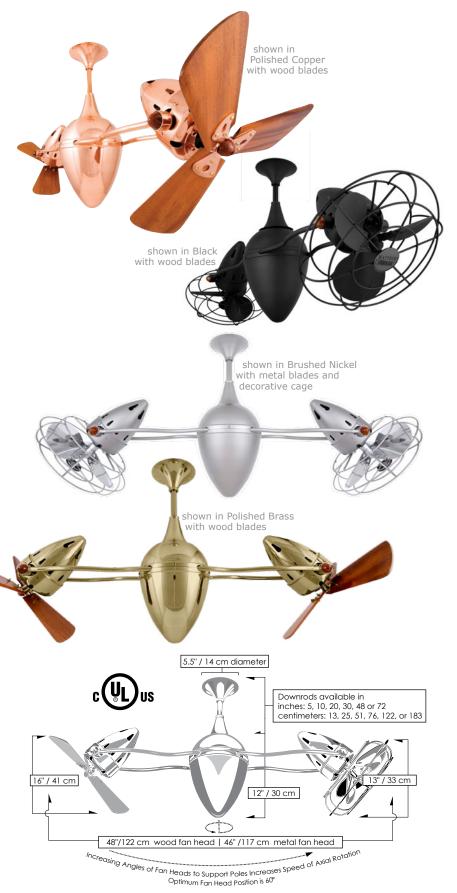

AR RUTHIANE

, , , ,		
FINISH AND BLADE OPTIONS		
SKU#	AR-XXXXXX-XXX (Model+Finish+Bla	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order Finishes	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira BRRR BRCP PB BRCP CR CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE	
Fan Blade	Solid Mahogany Wood Blade WD Metal Blade MTL	
TE	CHNICAL SPECS	
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	12 inches / 30 cm	+ downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020	DOE MOTOR EFF	FICIENCY DATA
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	48 inches / 122 cm	46 inches / 117 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	723 / 1308	591 / 1075
CFM (Low / High)	2644 / 4724	1215 / 2371
Watts (High)	96.94	103.53
CFM/Watt (High)	48.73	22.90

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy

Blade Pitch 19°

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy



Special Order Finishes



















Polished Chrome

Polished Chrome Damp Brushed Nickel Damp

Gloss White

Standard Finishes





Brushed Nickel

31°



Unique and versatile, the fan head of the Bianca Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Bianca can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Bianca Direcional carries a limited lifetime warranty.

























BIANCA **DIRECIONAL**

FINISH AND BLADE OPTIONS		
SKU#	BD-XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Brushed Nickel D Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	CP Damp CRDAMP
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TI	ECHNICAL SPECS	
Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length 16 inches / 41 cm
	Wood Blades:	+ downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White I	Voise
Safety Certification	UL / CUL	
Warranty Limited Lifetime		
NEW JAN 21, 2020		_
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
6		Decorative Cage

or Safety Cage **Guard Options** No Cage Option with tight tines RPM (Low / High) 926 / 1280 615 / 1149 CFM (Low / High) 1568 / 2274 814 / 1199 Watts (High) 47.46 49.00 CFM/Watt (High) 47.91 24.47 31° Blade Pitch 19°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm Flat ceiling canopy

(Not compatible with vaulted ceiling canopy)

Decora-style, 3-speed wall control in white



Special Order Finishes



















Standard Finishes











Brisa 2000



Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.













Product Features















BRI	SA 200	00	
FINISH	AND BLADE OPT	IONS	
SKU#	B2K-XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX		
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome I Brushed Nickel Da Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira		
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL	
TE	ECHNICAL SPECS		
Fan Weight	21 lbs		
	21105	110 or 220	
Voltage			
Voltage Motor Type			
	110 or 220		
Motor Type	110 or 220 AC		
Motor Type Rotation Downrods Lengths Field cuttable.	110 or 220 AC Yes inches: 5, 10, 20, 3		
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2	5, 51, 76, 122, 183	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch	+ downrod length th protective oat only. Neither	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter Overall Drop	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch 10 inches / 25 cm Damp location wire powder or clear coastal, saltwater	+ downrod length th protective oat only. Neither nor chlorine	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter Overall Drop Environment	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch 10 inches / 25 cm Damp location wire powder or clear c coastal, saltwater compatible.	+ downrod length th protective oat only. Neither nor chlorine	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter Overall Drop Environment Ambience	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch 10 inches / 25 cm Damp location wi powder or clear c coastal, saltwater compatible. Soothing White No	+ downrod length th protective oat only. Neither nor chlorine	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter Overall Drop Environment Ambience Safety Certification Warranty	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch 10 inches / 25 cm Damp location wipowder or clear c coastal, saltwater compatible. Soothing White No	+ downrod length th protective oat only. Neither nor chlorine	
Motor Type Rotation Downrods Lengths Field cuttable. Non-threaded Downrod Diameter Overall Drop Environment Ambience Safety Certification Warranty	110 or 220 AC Yes inches: 5, 10, 20, 3 centimeters: 13, 2 .75 inch 10 inches / 25 cm Damp location wire powder or clear c coastal, saltwater compatible. Soothing White No UL / CUL Limited Lifetime	+ downrod length th protective oat only. Neither nor chlorine	

Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	40 inches / 102 cm	39 inches/99 cm
Fan Blade Diameter	16 inches/41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	866 / 1336	790 / 1205
CFM (Low / High)	1602 / 2376	790 / 1265
Watts (High)	52.44	55.15
CFM/Watt (High)	45.31	22.94
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

NOTE: *Unipack Shipping for Wood Blades only

Special Order Finishes



Brushed

Brass



Polished

Brass



Brushed

Copper





Polished

Copper



Polished

Chrome



Polished Chrome Damp



Brushed Nickel Damp















The Bruna Parede is reminiscent of the wall fans of the early 20th century. The fan head of the Bruna Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Bruna Parede carries a limited lifetime warranty.

Product Features

























shown in Bronzette shown in Black shown in Gloss White shown in Polished Brass 16" / 41 cm 13" / 33 cm Infinitely Adjustable 180° Vertically and Horizontally 21" / 53 cm 5.5" / 14 cm optimum fan head position: 45° to yoke

BRUNA PAREDE

FINISH /	AND BLADE OPTIONS	
SKU#	BP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
TECHNICAL SPECS		
Fan Weight	8 lbs	

Blade Material	Metal
Voltage	110 or 220
Motor Type	AC
Oscillation	No
Fan Diameter	13 inches / 33 cm
Fan Height	21 inches / 51 cm
Fan Projection	16 inches / 41 cm
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling
Fan Guard	Safety Cage
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime


NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1021 / 1418	
CFM (Low / High)	839 / 1181	
Watts (High)	49.00	
CFM/Watt (High)	24.01	
Blade Pitch	31°	

STANDARD EQUIPMENT

Safety cage
Side-mounted wall junction box
Decora-style, 3-speed wall control in white











Few designs can match the timeless and sophisticated aesthetic of the Duplo-Dinamico 360° rotational fan. Other manufacturers have tried to reproduce this unique design, though all have proven to be of lesser quality and durability. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Duplo carries a limited lifetime warranty.






















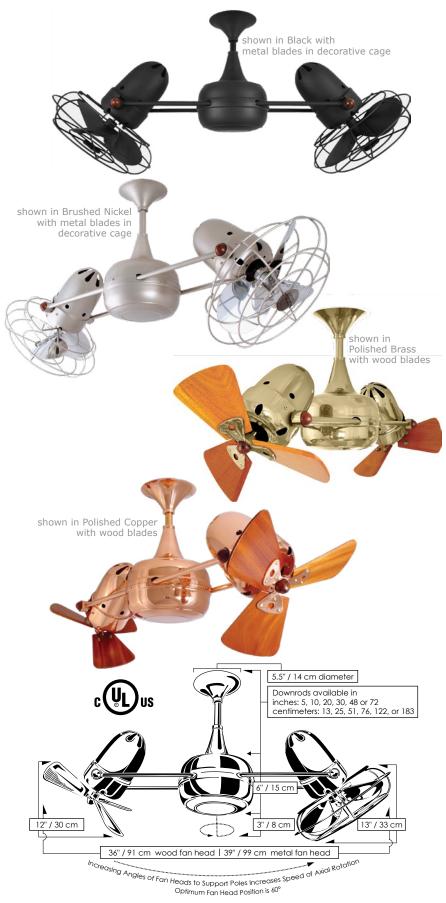

DUPLO-DINAMICO

FINISH AND BLADE OPTIONS

SKU#	DD-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black BK Bronzette BZZT Brushed Nickel BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome I Brushed Nickel Da Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP MM BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TE	ECHNICAL SPECS	
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	9 inches / 23 cm +	- downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020	DOE MOTOR EFF	ICIENCY DATA
Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	36 inches / 91 cm	39 inches/99 cm
Fan Blade Diameter	16 inches/41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	1274 / 1534	598 / 1109

STANDARD EQUIPMENT

2673 / 3210

74.06

43.34

19°

One downrod of 10 inches / 25 cm

CFM (Low / High)

CFM/Watt (High)

Watts (High)

Blade Pitch

Flat ceiling canopy


Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy

NOTE: *Unipack Shipping for Wood Blades only









1240 / 2274 103.35

22.00

31°





The Italo Ventania is the largest 360° rotational fan in the Matthews Fan Co collection. Its vortex sculpted arms grasp also remarkable, side-mounted fan heads in gentle, equatorial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Ar Ruthiane carries a limited lifetime warranty.























ITALO VENTANIA

FINISH AND BLADE OPTIONS		
SKU#	IV-XXXXXXX-XXX (Model+Finish+Bla	nde)
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome I Brushed Nickel Da Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
TECHNICAL SPECS		
Fan Weight	24 lbs	
Voltage	110 or 220	
Motor Type	AC AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	14 inches / 36 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White No	oise
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020	D DOE MOTOR EFF	FICIENCY DATA
Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	62 inches /157 cm	60 inches /152 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	715 / 1209	685 / 1139
CFM (Low / High)	2644 / 4519	1372 / 2278
Watts (High)	91.63	94.76
CFM/Watt (High)	49.32	24.04
Blade Pitch	19°	31°
STA	NDARD EQUIPMEN	

One downrod of 10 inches / 25 cm Flat ceiling canopy

Decora-style, 3-speed wall control in white

OPTIONAL EQUIPMENT

29° vaulted ceiling mount and canopy



Special Order Finishes

Brass

Copper

Brass



Copper

Chrome

Standard Finishes



Gloss White



Brushed Nickel



Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.





















Product Features





JAROLD DIRECIONAL

FINISH	AND BLADE OP	TIONS	
SKU#	JD-XXXXXXX-XX (Model+Finish+Bl	ade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN	
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Brushed Nickel Di Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira		
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL	
T	TECHNICAL SPECS		
Fan Weight	7 lbs		
Voltage	110 or 220		
Motor Type	AC		
Oscillation	No		
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76		
Downrod Diameter	.75 inch		
Overall Drop	Metal blades.	13 inches / 33 cm + downrod length	
	vvood Blades:	16 inches / 41 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.		
Ambience	Soothing White Noise		
Safety Certification	UL / CUL		
Warranty	Limited Lifetime		
NEW JAN 21, 2020	D DOE MOTOR EF	FICIENCY DATA	
Fan Head Options	Solid Mahogany Wood	Metal with Guard	
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm	
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm	
Guard Options	No Cage Option	Decorative Cage or Safety Cage	

	,	,
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy)

Decora-style, 3-speed wall control in white





Brushed

Brass



Polished

Brass



Brushed Copper



Polished

Copper





Polished Chrome



Polished

Chrome



Brushed Nickel Damp









Brushed Nickel

77





The Michelle Parede is reminiscent of wall fans of the early 20th century. The fan head of the Michelle Parede wall mounted fan can be infinitely positioned vertically and horizontally across 180-degree arcs to provide maximum directional airflow. It can be mounted in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any space. Constructed of cast aluminum, heavy spun and stamped steel, the Michelle Parede carries a limited lifetime warranty.




















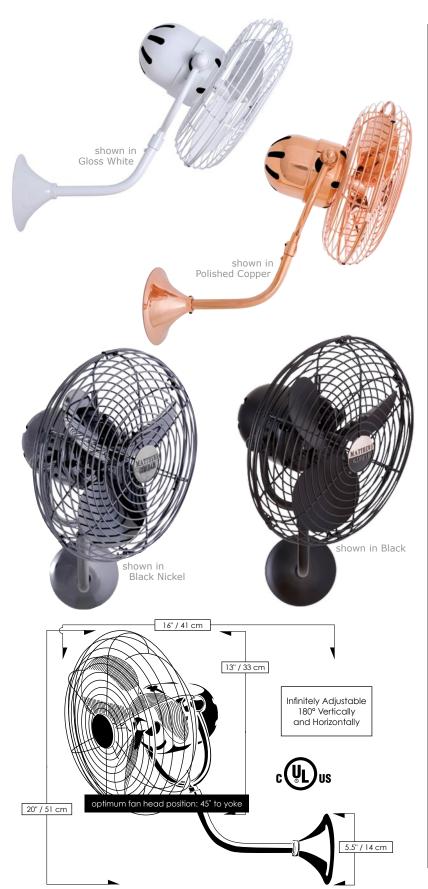

MICHELLE PAREDE

FINISH AND BLADE OPTIONS		
SKU#	MP-XXXXXX (Model+Finish)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Chrome Damp Brushed Nickel Damp Gloss White Agua Marinha Ametista Black Nickel Esmeralda Ouro Rubi Safira	BRBR BRCP PB CR CP CRDAMP BNDAMP WH LTBLUE LTPURPLE BKN GREEN GOLD RED BLUE
TECHNICAL SPECS		

Fan Weight	8 lbs	
Blade Material	Metal	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Fan Diameter	13 inches / 33 cm	
Fan Height	20 inches / 51 cm	
Fan Projection	16 inches / 41 cm	
Recommended Mounting Height	Approximately 24 inches / 61 cm from ceiling	
Fan Guard	Safety Cage	
Environment	Damp location with powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
RPM (Low / High)	1020 / 1418	
CFM (Low / High)	838 / 1181	
	I .	

Watts (High) 49.00 CFM/Watt (High) 24.01 31° Blade Pitch STANDARD EQUIPMENT

Safety cage Side-mounted wall junction box Decora-style, 3-speed wall control in white

Gloss White





Polished

Copper

Polished

Chrome

Polished

Brass

Brushed

Copper

Brushed

Brass

Black

Standard Finishes





Vent-Bettina



The Vent-Bettina 360° rotational fan is thoughtfully designed with its arms gently upward curving. The fan offers fluid lines and quiet axial rotation with motor heads which can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Vent-Bettina carries a limited lifetime warranty.


























VENT-BETTINA FINISH AND BLADE OPTIONS VB-XXXXXXX-XXX SKU# (Model+Finish+Blade) Black BZZT Standard Finishes Bronzette **Brushed Nickel** BN **Brushed Brass BRBR Brushed Copper BRCP** Polished Brass РΒ Polished Chrome CR ĊР Polished Copper Polished Chrome Damp **CRDAMP BNDAMP** Brushed Nickel Damp Special Order Gloss White WH Agua Marinha **LTBLUE** LTPURPLE Ametista Black Nickel **BKN GREEN** Esmeralda Ouro GOLD Rubi RED Safira **BLUE** Solid Mahogany Fan Blade Wood Blade Metal Blade MTL **TECHNICAL SPECS** Fan Weight 19 lbs Voltage 110 or 220 Motor Type AC Rotation Yes **Downrods Lengths** inches: 10, 20, 30, 48, 72 Field cuttable. centimeters: 25, 51, 76, 122, 183 Non-threaded Downrod Diameter .75 inch Overall Drop 7 inches / 18 cm + downrod length Damp location with protective powder or clear coat only. Neither Environment coastal, saltwater nor chlorine compatible **Ambience** Soothing White Noise Safety Certification UL / CUL Limited Lifetime Warranty NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA Solid Mahogany Metal with Guard Fan Head Options Wood Fan Diameter 42 inches / 107 cm 44 inches /112 cm Fan Blade Diameter 16 inches / 41 cm 13 inches / 33 cm Decorative Cage **Guard Options** No Cage Option or Safety Cage with tight tines RPM (Low / High) 796 / 1252 699 / 1101 1346 / 2077 CFM (Low / High) 2070 / 329 Watts (High) 87.32 89.63 CFM/Watt (High) 37.71 23.17 31° Blade Pitch 19° STANDARD EQUIPMENT One downrod of 10 inches / 25 cm Flat ceiling canopy Decora-style, 3-speed wall control in white **OPTIONAL EQUIPMENT**





29° vaulted ceiling mount and canopy



