

FUNNEL

Design by Ramón Benedito.

VIBIA

Reference

2013.

Application

Ceiling Fixtures

Installation type

Surface mounted

Description

Diffuser

Polycarbonate diffuser

Materials

Shade: Aluminum

Reflector: Aluminum

Wall plate: Steel


Finishes

 **2013-10** White (NCS S 0300-N)

 **2013-36** Soft Pink (NCS S 1010-Y50R)

 **2013-47** Green L1 (NCS S 4005-G80Y)

Sketch



Light source: 2700K CRI >80 2941 lm 108 lm/W

Fixture: 2336 lm 85 lm/W

Driver included: CC - Constant Current 700 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: TRIAC


Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

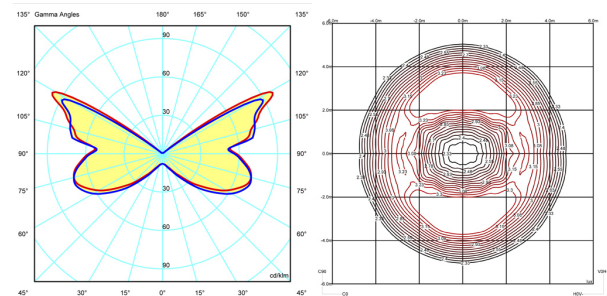

Certificates



Electrical characteristics

6 x LED 4.5W 700mA

Total 0.0 W

