

louis poulsen

2024 Catalog

Country: **United States**
Language: **English**

CONTACT

Louis Poulsen
36 East 31st Street
NY, NY 10016

Phone: (332) 867 6060
Email: customerservice@louis poulsen.com

© Copyright 2020 by Louis Poulsen USA Inc.
All Rights Reserved.

The unauthorized reproduction and use of any design contained herein, including the duplication by photocopying or otherwise, of any design or part thereof, or of the specifications contained herein, for any purpose other than the specification of Louis Poulsen USA products, is a violation prohibited by law of Louis Poulsen USA's intellectual property rights, and will be subject to penalty.

Specifications subject to change without notice.

Prices shown in U.S. and Canadian dollars supersede all previously published prices.

DESIGN TO SHAPE LIGHT

Table of Contents

Please note that prices displayed have been rounded up to nearest number and may not match invoiced totals absolutely



5
AJ Eklipsta Surface



6
LP Grand Surface



7
Above



8
AJ Royal



9
Cirque



10
Doo-Wop



11
Enigma 425



12
Enigma 545



13
Keglen



15
LC Shutters



16
LP Grand Suspended



18
Moser



19
OE Quasi Light



20
Patera



21
Patera Oval



22
PH 2/1 Pendant



23
PH 2/1 Stem Fitting



24
PH 3/2 Pendant



25
PH 3/3 Pendant



26
PH 3 1/2-3 Glass Pendant




27
PH 3 1/2-3 Pendant



28
PH 4/3 Pendant



29
PH 4 1/2-4 Glass Pendant



30
PH 5



31
PH 5 Anniversary



32
PH 5 Mini



33
PH 5/5 Pendant



34
PH 5-4 1/2 & PH 6 1/2-6



35
PH Artichoke



37
PH Artichoke Anniversary



38
PH Artichoke Glass



39
PH Louvre



40
PH Septima



41
PH Snowball



42
Toldbod 6.1/8.7 Glass Pendant



43
Toldbod Pendant



44
VL 56 Pendant



45
VL Ring Crown 1



46
VL Ring Crown 3-5-7



47
VL45 Radiohus Pendant



48
Wohler



49
AJ Mini Anniversary



50
AJ Mini Table



51
AJ Oxford Table Lamp



52
AJ Table



53
Keglen Table



54
NJP Mini



55
NJP Table



56
Panthella 160 Portable



57
Panthella 250 Table Lamp



58
Panthella 320 Table Lamp



59
Panthella 400 Table Lamp



60
PH 2/1 Portable



61
PH 2/1 Table



62
PH 3/2 Glass Table



63
PH 3½-2½ Glass Table



64
PH 3½-2½ Table



65
PH 4/3 Table



66
PH 4½-3½ Glass Table



67
VL38 Table



68
Yuh Table



69
AJ Eklipsta Wall



70
AJ Wall



71
Keglen Wall



72
LP Grand Wall



73
LP Slim Round Wall



74
NJP Wall



75
PH 2/1 Wall



76
PH 3/2 Wall



77
PH Hat



78
VL Ring Crown Wall



79
VL Studio Wall



80
VL38 Wall



81
Yuh Wall



82
AJ Floor



83
Keglen Floor



84
Moonsetter



85
NJP Floor



86
Panthella Floor



87
PH 3½-2½ Floor



88
PH 4½-3½ Glass Floor



89
PH 80



90
VL Studio Table/Floor



91
VL38 Floor



92
Yuh Floor



93
AJ 50 Wall



94
AJ Eklipsta Outdoor



95
Flindt Wall



96
Nyhavn Wall



97
PH 3-2½ Wall



98
PH Wall



99
Skot Wall



100
Toldbod 6.1 Wall



101
AJ Garden Bollard



102
Bysted Garden Bollard



104
Flindt Garden Bollard



106
PH 3-2½ Bollard



107
Toldbod 6.1 Bollard

AJ EKLIPTA SURFACE

Surface Mounted

Designer: Arne Jacobsen

Description: The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer hand blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture.


Finish: White, powder coated. White opal glass.

Material: Ceiling/Wall box: Spun aluminum. Diffuser: Hand blown white opal glass.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box (13.7"/17.7") or 3" octagonal junction box (8.7").

Weight: Max: 11 lbs.

Compliance: cULus, Wet location.

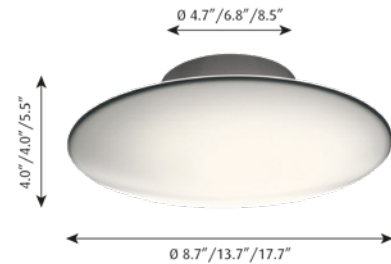

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
AJE-WC	13.7 IN	White	1x60W A-19/IF Medium US			120V	WALL AND SURFACE	5703411153338	5842905400
AJE-WC	13.7 IN	White	LED 3000K 10W	DIM 0-10V	705	120-277V/60HZ	WALL AND SURFACE	5703411143193	10000121108
AJE-WC	17.7 IN	White	1x100W A-19/IF medium US			120V	WALL AND SURFACE	5703411153307	5842905426
AJE-WC	17.7 IN	White	LED 3000K 24W	DIM 0-10V	1937	120-277V/60HZ	WALL AND SURFACE	5703411143131	10000121113
AJE-WC	8.7 IN	White	1x40W G9			120V	WALL AND SURFACE	5703411115534	5743908011
AJE-WC	8.7 IN	White	LED 3000K 10W		371	120V	WALL AND SURFACE	5703411840573	5743911192
SPAREPART									ORDER NO.
AJ EKLIPTA 220 GLASS									5743590005

LP GRAND SURFACE

Surface Mounted

Designer: Christian Flindt

Description: The circular luminaire emits a combination of softly diffused, glare-free, downwardly directed light and reflected indirect light from its curved upper rings. A large angled reflector encircles the diffuser and reduces the contrast around the edge. The top reflector is perfectly curved to distribute uplight at a broad angle. A colored outer shade surrounds the reflector and creates an interreflection of light, resulting in a graceful glow on the outside of the top and bottom reflectors. In total, it creates four rings of light surrounding the central diffuser.

Finish: Reflector: Matte-white satin finish.
Outer shade (outside): Matte (black and champagne) or gloss (white). Wet-painted surface. Diffuser: Glossy.

Material: Ø320:
Top reflector: ABS.
Bottom reflector: ABS.
Outer shade: ABS.
Diffuser: PMMA.
Housing: Die-cast Aluminum.

Ø580:
Top reflector: ABS.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Ø880:
Top reflector: PE.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Ø1480:
Top reflector: PE.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Mounting: Ø320/Ø580:
Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max: 70 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHT TECHNIQUE	LIGHTING CONTROL	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
LP-GRAND-SURF	12.6 IN	Black	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693049141	5741939260
LP-GRAND-SURF	12.6 IN	Black	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693030774	5741939325
LP-GRAND-SURF	12.6 IN	Black	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030088	5741939383
LP-GRAND-SURF	12.6 IN	Champagne	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693027026	5741939257
LP-GRAND-SURF	12.6 IN	Champagne	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693049455	5741939312
LP-GRAND-SURF	12.6 IN	Champagne	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030316	5741939370
LP-GRAND-SURF	12.6 IN	White	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693027255	5741939244
LP-GRAND-SURF	12.6 IN	White	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693031009	5741939309
LP-GRAND-SURF	12.6 IN	White	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030545	5741939367

ABOVE

Pendants

Designer: Mads Odgård

Description: The fixture emits soft comfortable downlight. The conical shape and the matte, white-painted inside help assure even distribution of the light. The opening at the top of the fixture provides decorative illumination of the arch above, and ensures that the fixture retains the full expression of its visual shape both when illuminated and when switched off.

Finish: White, matte or black, matte, wet painted.

Material: Shade: Spun aluminum.

Mounting: Canopy: Black. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet.

Weight: Max: 15 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
ABO-P	15.7 IN	Black	1x22W A-21/medium			120V	Black fabric cord	5703411178379	5741925384
ABO-P	15.7 IN	Black	LED 3000-1800K D2W 44W	DIM 0-10V	2413	120-277V/60HZ	Black fabric cord	5714693152360	10000149859
ABO-P	15.7 IN	Black	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	2413	120V	Black fabric cord	5714693152322	10000149863
ABO-P	15.7 IN	Black	LED 3000K 44W	DIM 0-10V	2929	120-277V/60HZ	Black fabric cord	5714693146659	10000149691
ABO-P	15.7 IN	Black	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	2929	120V	Black fabric cord	5714693152407	10000149855
ABO-P	15.7 IN	White	1x22W A-21/medium			120V	Black fabric cord	5703411178331	5741925371
ABO-P	15.7 IN	White	LED 3000-1800K D2W 44W	DIM 0-10V	2413	120-277V/60HZ	Black fabric cord	5714693152353	10000149860
ABO-P	15.7 IN	White	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	2413	120V	Black fabric cord	5714693152315	10000149864
ABO-P	15.7 IN	White	LED 3000K 44W	DIM 0-10V	2929	120-277V/60HZ	Black fabric cord	5714693152438	10000149852
ABO-P	15.7 IN	White	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	2929	120V	Black fabric cord	5714693152391	10000149856
ABO-P	6.9 IN	Black	1x10W A-15/medium			120V	Black fabric cord	5703411175385	5741919743
ABO-P	6.9 IN	White	1x10W A-15/medium			120V	Black fabric cord	5703411175392	5741919730
ABO-P	9.8 IN	Black	1x15W A-19/medium			120V	Black fabric cord	5703411175361	5741919769
ABO-P	9.8 IN	White	1x15W A-19/medium			120V	Black fabric cord	5703411175378	5741919756

*Available while stocks last

AJ ROYAL

Pendants

Designer: Arne Jacobsen


Description: The pendant comes in three sizes and is characterized by the ridges on top that allow a gentle light to exude upwards. In the new, energy-saving LED version, all three sizes come with a diffuser, which offers a smoother, 100% glare-free lighting.

Finish: White or black, wet painted.

Material: Shades: Spun aluminum. Rings: Steel. Diffuser: Frosted acrylic.

Mounting: Cord type: 18 AWG braided fabric covered power cord. Cord length: 12'. Black canopy and cord for black pendant, white canopy and cord for white pendant.

Compliance: cULus, Damp location.

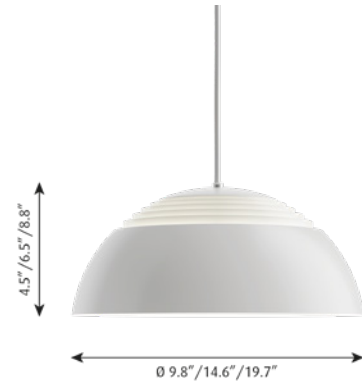

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
AJR-P	14.6 IN	Black	LED 2700K 16W	PHASE+DIM 0-10V	930	120-277V/60HZ	Black fabric cord and wire	5714693346288	10000151337
AJR-P	14.6 IN	Black	LED 3000K 16W	PHASE+DIM 0-10V	951	120-277V/60HZ	Black fabric cord and wire	5714693346165	10000151333
AJR-P	14.6 IN	White	LED 2700K 16W	PHASE+DIM 0-10V	1100	120-277V/60HZ	White fabric cord and wire	5714693346370	10000151340
AJR-P	14.6 IN	White	LED 3000K 16W	PHASE+DIM 0-10V	1125	120-277V/60HZ	White fabric cord and wire	5714693346196	10000151334
AJR-P	19.7 IN	Black	LED 2700K 30W	PHASE+DIM 0-10V	1898	120-277V/60HZ	White fabric cord and wire	5714693346585	10000151347
AJR-P	19.7 IN	Black	LED 3000K 30W	PHASE+DIM 0-10V	1955	120-277V/60HZ	Black fabric cord and wire	5714693346400	10000151341
AJR-P	19.7 IN	White	LED 2700K 30W	PHASE+DIM 0-10V	2309	120-277V/60HZ	Black fabric cord and wire	5714693346523	10000151345
AJR-P	19.7 IN	White	LED 3000K 30W	PHASE+DIM 0-10V	2242	120-277V/60HZ	White fabric cord and wire	5714693346431	10000151342

CIRQUE

Pendants

Designer: Clara von Zweigbergk

Description: The fixture provides a downward glare-free soft light by means of the white lacquered inner reflector.

Finish: Grey top, Copper top, Red top, Yellow top, wet painted.

Material: Shield: Drawn aluminum.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 4 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
CIRQUE-P	15 IN	Copper Top	1x22W A-21/medium	120V	White fabric cord	5703411175354	5741919772
CIRQUE-P	15 IN	Grey Top	1x22W A-21/medium	120V	White fabric cord	5703411174135	5741919895
CIRQUE-P	15 IN	Red Top	1x22W A-21/medium	120V	White fabric cord	5703411174579	5741919785
CIRQUE-P	15 IN	Yellow Top	1x22W A-21/medium	120V	White fabric cord	5703411174531	5741919798
CIRQUE-P	5.9 IN	Copper Top	1x10W A-15/medium	120V	White fabric cord	5703411175347	5741919837
CIRQUE-P	5.9 IN	Grey Top	1x10W A-15/medium	120V	White fabric cord	5703411174050	5741919918
CIRQUE-P	5.9 IN	Red Top	1x10W A-15/medium	120V	White fabric cord	5703411175330	5741919840
CIRQUE-P	5.9 IN	Yellow Top	1x10W A-15/medium	120V	White fabric cord	5703411175323	5741919853
CIRQUE-P	8.7 IN	Copper Top	1x15W A-19/medium	120V	White fabric cord	5703411174494	5741919808
CIRQUE-P	8.7 IN	Grey Top	1x15W A-19/medium	120V	White fabric cord	5703411175309	5741919905
CIRQUE-P	8.7 IN	Red Top	1x15W A-19/medium	120V	White fabric cord	5703411174456	5741919811
CIRQUE-P	8.7 IN	Yellow Top	1x15W A-19/medium	120V	White fabric cord	5703411174418	5741919824
SPAREPART							ORDER NO.
CIRQUE 380 SHADE GREY TOP							5741099744
CIRQUE 220 SHADE GREY TOP							5741099757
CIRQUE 150 SHADE GREY TOP							5741099760

DOO-WOP

Pendants

Designer: Louis Poulsen A/S in cooperation with the Navy Buildings Department

Description: The fixture primarily provides a downward directed soft light by means of the white lacquered inner conical reflector. The outer reflector, the main shade, contributes to directing the light upwards and downwards, while at the same time spreading the soft diffused light. The inside of the main shade is illuminated through an opening in the inner conical reflector.

Finish: White or Dark Grey, powder coated or polished Brass or Copper.


Please note that the brass and copper surfaces are untreated. This means that the surface will change over time and develop a patina. This process may have already begun when the product is delivered.

Material: Shade: Spun aluminum or spun brass, or copper. Suspension: Spun aluminum. Struts: Stainless steel.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 4 lbs.

Compliance: cULus, Damp location.

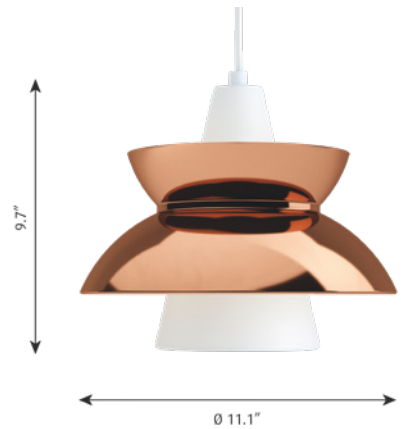

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
DOO-WOP	Brass	1x15W A-19/medium	120V	White fabric cord	5703411174012	5741919921
DOO-WOP	Copper	1x15W A-19/medium	120V	White fabric cord	5703411173893	5741919950
DOO-WOP	Dark Grey	1x15W A-19/medium	120V	White fabric cord	5703411173978	5741919934
DOO-WOP	White	1x15W A-19/medium	120V	White fabric cord	5703411173930	5741919947

ENIGMA 425

Pendants

Designer: Shoichi Uchiyama


Description: The fixture emits glare-free, soft, comfortable downward light. The shade design ensures even illumination of the surface. The matte upper surface diffuses the light, while the shiny lower surface ensures optimal reflection.

Finish: Brushed aluminum, clear coated or black wet painted. Shades: White or black acrylic.

Material: Cone and pendant tube: Lacquered or wet painted brushed aluminum. Wire: Stainless steel. Shades: Acrylic.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Compliance: cULus, Dry location.

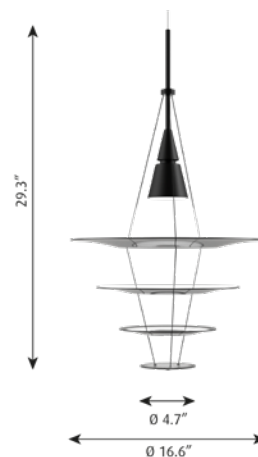

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
ENIG-425-P	Black	1x8W 1/50W/PAR16 GU10 US	120V	Black cord	5703411161135	10000146255
ENIG-425-P	BR ALU	1x8W 1/50W/PAR16 GU10 US	120V	White cord	5703411124833	10000146254
SPAREPART						ORDER NO.
Enigma Ø120 w/bush. white						5741086786
Enigma Ø210 white						5741086799
Enigma Ø310 white						5741086809
Enigma Ø422 white						5741086812
Enigma Ø545 white						5741087099
Enigma Ø120 w/bush. black						5741088878
Enigma Ø210 black						5741088881
Enigma Ø310 black						5741088894
Enigma Ø422 black						5741088904
Enigma Ø545 black						5741088917

ENIGMA 545

Pendants

Designer: Shoichi Uchiyama


Description: The fixture emits glare-free, soft, comfortable downward light. The shade design ensures even illumination of the surface. The matte upper surface diffuses the light, while the glossy lower surface ensures optimal reflection.

Finish: Brushed aluminum, clear coated or black wet painted. Shades: White or black acrylic.

Material: Cone and pendant tube: Lacquered or wet painted brushed aluminum. Wire: Stainless steel. Shades: Acrylic.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Compliance: cULus, Dry location.

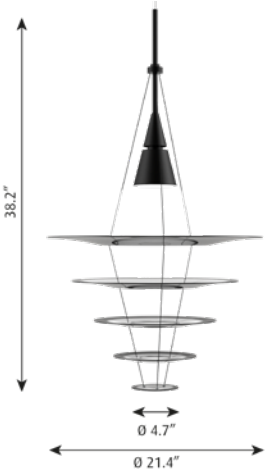

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
ENIG-545-P	Black	1x8W 1/50W/PAR16 GU10 US	120V	Black cord	5703411124741	10000146257
ENIG-545-P	BR ALU	1x8W 1/50W/PAR16 GU10 US	120V	White cord	5703411161128	10000146256

KEGLEN

Pendants

Designer: Big Ideas

Description: The pendants distinctive conical shades each have a built-in curved opal insert. This ensures a both attractive and glare-free downward light. Each version of the shade provides its own diffusion of light while the white inner side ensures that its light is reflected flawlessly. A gentle light is also emitted upwards through a uniform, discreet opening in the top of the shades which adds to the perfect ambience.

Finish: Black or white, matte, wet painted.

Material: Shade: Spun aluminum.
Diffusor: Injection molded PC.

Mounting: Suspension type: 1x black stainless steel aircraft cable. Cord type: 18 AWG braided fabric covered power cord. Cord length: 12'. Black canopy and cord for black pendant, white canopy and cord for white pendant.

Weight: Max. 15 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
KEG-P	15.7 IN	Black	LED 2700K 21W	PHASE DIMMING (MAINS DIMM)	1195	120V	BLACK TEXTILE AND WIRE	5714693348640	10000151389
KEG-P	15.7 IN	Black	LED 2700K 21W	PHASE+DIM 0-10V	1195	120-277V/60HZ	Black fabric cord and wire	5714693348619	10000151388
KEG-P	15.7 IN	Black	LED 3000K 21W	PHASE DIMMING (MAINS DIMM)	1231	120V	BLACK TEXTILE AND WIRE	5714693348527	10000151385
KEG-P	15.7 IN	Black	LED 3000K 21W	PHASE+DIM 0-10V	1231	120-277V/60HZ	Black fabric cord and wire	5714693348497	10000151384
KEG-P	15.7 IN	White	LED 2700K 21W	PHASE DIMMING (MAINS DIMM)	1357	120V	WHITE TEXTILE AND WIRE	5714693348701	10000151391
KEG-P	15.7 IN	White	LED 2700K 21W	PHASE+DIM 0-10V	1357	120-277V/60HZ	White fabric cord and wire	5714693348671	10000151390
KEG-P	15.7 IN	White	LED 3000K 21W	PHASE DIMMING (MAINS DIMM)	1398	120V	WHITE TEXTILE AND WIRE	5714693348589	10000151387
KEG-P	15.7 IN	White	LED 3000K 21W	PHASE+DIM 0-10V	1398	120-277V/60HZ	White fabric cord and wire	5714693348558	10000151386
KEG-P	25.6 IN	Black	LED 2700K 31W	PHASE DIMMING (MAINS DIMM)	2035	120V	BLACK TEXTILE AND WIRE	5714693348886	10000151397
KEG-P	25.6 IN	Black	LED 2700K 31W	PHASE+DIM 0-10V	2035	120-277V/60HZ	Black fabric cord and wire	5714693348855	10000151396
KEG-P	25.6 IN	Black	LED 3000K 31W	PHASE DIMMING (MAINS DIMM)	2180	120V	BLACK TEXTILE AND WIRE	5714693348763	10000151393
KEG-P	25.6 IN	Black	LED 3000K 31W	PHASE+DIM 0-10V	2180	120-277V/60HZ	Black fabric cord and wire	5714693348732	10000151392
KEG-P	25.6 IN	White	LED 2700K 31W	PHASE DIMMING (MAINS DIMM)	2104	120V	WHITE TEXTILE AND WIRE	5714693348947	10000151399
KEG-P	25.6 IN	White	LED 2700K 31W	PHASE+DIM 0-10V	2104	120-277V/60HZ	White fabric cord and wire	5714693348916	10000151398
KEG-P	25.6 IN	White	LED 3000K 31W	PHASE DIMMING (MAINS DIMM)	2254	120V	WHITE TEXTILE AND WIRE	5714693348824	10000151395
KEG-P	25.6 IN	White	LED 3000K 31W	PHASE+DIM 0-10V	2254	120-277V/60HZ	White fabric cord and wire	5714693348794	10000151394
KEG-P	6.9 IN	Black	LED 2700K 5.5W	DIM 0-10V	276	120-277V/60HZ	Black fabric cord and wire	5714693348138	10000151372
KEG-P	6.9 IN	Black	LED 2700K 5.5W	PHASE DIMMING (MAINS DIMM)	276	120V	BLACK TEXTILE AND WIRE	5714693348169	10000151373
KEG-P	6.9 IN	Black	LED 2700K 5.5W	PHASE DIMMING (MAINS DIMM)	276	120V	Black fabric cord and wire	5714693862375	10000155282
KEG-P	6.9 IN	Black	LED 3000K 5.5W	DIM 0-10V	287	120-277V/60HZ	Black fabric cord and wire	5714693348015	10000151368
KEG-P	6.9 IN	Black	LED 3000K 5.5W	PHASE DIMMING (MAINS DIMM)	287	120V	Black fabric cord and wire	5703411188866	10000155307
KEG-P	6.9 IN	Black	LED 3000K 5.5W	PHASE DIMMING (MAINS DIMM)	287	120V	BLACK TEXTILE AND WIRE	5714693348046	10000151369

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
KEG-P	6.9 IN	White	LED 2700K 5.5W	DIM 0-10V	360	120-277V/60HZ	White fabric cord and wire	5714693348190	10000151374
KEG-P	6.9 IN	White	LED 2700K 5.5W	PHASE DIMMING (MAINS DIMM)	360	120V	White fabric cord and wire	5703411188835	10000155306
KEG-P	6.9 IN	White	LED 2700K 5.5W	PHASE DIMMING (MAINS DIMM)	360	120V	WHITE TEXTILE AND WIRE	5714693348220	10000151375
KEG-P	6.9 IN	White	LED 3000K 5.5W	DIM 0-10V	374	120-277V/60HZ	White fabric cord and wire	5714693348077	10000151370
KEG-P	6.9 IN	White	LED 3000K 5.5W	PHASE DIMMING (MAINS DIMM)	374	120V	White fabric cord and wire	5703411189054	10000155308
KEG-P	6.9 IN	White	LED 3000K 5.5W	PHASE DIMMING (MAINS DIMM)	374	120V	WHITE TEXTILE AND WIRE	5714693348107	10000151371
KEG-P	9.8 IN	Black	LED 2700K 8W	PHASE DIMMING (MAINS DIMM)	381	120V	BLACK TEXTILE AND WIRE	5714693348404	10000151381
KEG-P	9.8 IN	Black	LED 2700K 8W	PHASE+DIM 0-10V	381	120-277V/60HZ	Black fabric cord and wire	5714693348374	10000151380
KEG-P	9.8 IN	Black	LED 3000K 8W	PHASE DIMMING (MAINS DIMM)	390	120V	BLACK TEXTILE AND WIRE	5714693348282	10000151377
KEG-P	9.8 IN	Black	LED 3000K 8W	PHASE+DIM 0-10V	390	120-277V/60HZ	Black fabric cord and wire	5714693348251	10000151376
KEG-P	9.8 IN	White	LED 2700K 8W	PHASE DIMMING (MAINS DIMM)	462	120V	WHITE TEXTILE AND WIRE	5714693348466	10000151383
KEG-P	9.8 IN	White	LED 2700K 8W	PHASE+DIM 0-10V	462	120-277V/60HZ	White fabric cord and wire	5714693348435	10000151382
KEG-P	9.8 IN	White	LED 3000K 8W	PHASE DIMMING (MAINS DIMM)	472	120V	WHITE TEXTILE AND WIRE	5714693348343	10000151379
KEG-P	9.8 IN	White	LED 3000K 8W	PHASE+DIM 0-10V	472	120-277V/60HZ	White fabric cord and wire	5714693348312	10000151378
SPAREPART									ORDER NO.
CANOPY SHADE BLACK KEGLEN									10000151814
CANOPY SHADE WHITE KEGLEN									10000151815

LC SHUTTERS

Pendants

Designer: Louise Campbell

Description: The fixture emits a primarily downward illumination. The perforated pattern on the shade provides a soft illumination around the fixture. Meanwhile, the perforation helps lighten up the surface of the shade in a decorative way, when it is turned on, thereby maintaining the contour of the fixture, whether it is on or off. The light source is surrounded by an opal diffuser, which ensures that the fixture is 100% glare-free. And finally, the shape of the diffuser allows a beautiful view into the fixture.

Finish: White, powder coated.

Material: Shade: Spun aluminum, punched and embossed. Suspension: Die cast aluminum. Diffuser ball: handblown matte white opal glass.

Mounting: Cord type: 2-conductor, 18 AWG white PVC power cord. Canopy: White. Cord length: 12’.

Weight: Max: 6 Lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
LC-SHUT-P	White	1x15W E26	120V	White cord	5714693102884	5741913396

LP GRAND SUSPENDED

Pendants

Designer: Christian Flindt

Description: The circular luminaire emits a combination of softly diffused, glare-free, downwardly directed light and reflected indirect light from its curved upper rings. A large angled reflector encircles the diffuser and reduces the contrast around the edge. The top reflector is perfectly curved to distribute uplight at a broad angle. A colored outer shade surrounds the reflector and creates an interreflection of light, resulting in a graceful glow on the outside of the top and bottom reflectors. In total, it creates four rings of light surrounding the central diffuser.

Finish: Reflector: Matte-white satin finish.
Outer shade (outside): Matte (black and champagne) or gloss (white). Wet-painted surface. Diffuser: Glossy.

Material: Ø320:
Top reflector: ABS.
Bottom reflector: ABS.
Outer shade: ABS.
Diffuser: PMMA.
Housing: Die-cast Aluminum.

Ø580:
Top reflector: ABS.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Ø880:
Top reflector: PE.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Ø1480:
Top reflector: PE.
Bottom reflector: PE.
Outer shade: ABS.
Diffuser: PMMA.
Housing: ABS.

Mounting: Ø320:
Suspension type: 3x stainless steel aircraft-cable.
Suspension length: 12 ft.
Canopy: White.
Cord type: 5 conductor, 18 AWG white PVC power cord.

Ø580:
Suspension type: 3x stainless steel aircraft-cable.
Suspension length: 12 ft.
Canopy: White.
Cable & Wire length: 4 m.
Cord type: 5 conductor, 18 AWG white PVC power cord.

Ø880:
Suspension type: 3x stainless steel aircraft-cable.
Suspension length: 12 ft.
Canopy: White.
Cable & Wire length: 4 m.
Cord type: 5 conductor, 18 AWG white PVC power cord.

Ø1480:
Suspension type: 4x stainless steel aircraft-cable.
Suspension length: 12 ft.
Canopy: White.
Cable & Wire length: 4 m.
Cord type: 2x5 conductor, 18 AWG white PVC power cord.

Weight: Max: 70 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
LP GRAND-SUSP	12.6 IN	Black	LED 2700K 12W	PHASE+DIM 0-10V	1052	120-277V/60HZ	White cord	5714693028238	5741938902
LP GRAND-SUSP	12.6 IN	Black	LED 3000K 12W	PHASE+DIM 0-10V	1151	120-277V/60HZ	White cord	5714693027750	5741938960
LP GRAND-SUSP	12.6 IN	Black	LED 4000K 12W	PHASE+DIM 0-10V	1166	120-277V/60HZ	White cord	5714693027484	5741939024
LP GRAND-SUSP	12.6 IN	Champagne	LED 2700K 12W	PHASE+DIM 0-10V	1052	120-277V/60HZ	White cord	5714693028467	5741938892
LP GRAND-SUSP	12.6 IN	Champagne	LED 3000K 12W	PHASE+DIM 0-10V	1151	120-277V/60HZ	White cord	5714693027989	5741938957
LP GRAND-SUSP	12.6 IN	Champagne	LED 4000K 12W	PHASE+DIM 0-10V	1166	120-277V/60HZ	White cord	5714693032686	5741939011
LP GRAND-SUSP	12.6 IN	White	LED 2700K 12W	PHASE+DIM 0-10V	1052	120-277V/60HZ	White cord	5714693032051	5741938889
LP GRAND-SUSP	12.6 IN	White	LED 3000K 12W	PHASE+DIM 0-10V	1151	120-277V/60HZ	White cord	5714693032266	5741938944
LP GRAND-SUSP	12.6 IN	White	LED 4000K 12W	PHASE+DIM 0-10V	1166	120-277V/60HZ	White cord	5714693032471	5741939008

MOSER

Pendants

Designer: Anu Moser

Description: The fixture emits diffused light and the thickness of the glass results in a very comfortable light distribution.

Finish: Matte white opal.

Material: Suspension: Polished aluminum. Shade: hand blown matte white opal glass.

Mounting: Canopy: White. Cord type: 3-conductors, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 7 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
MOS-P	7.3 IN	Matt White Opal Glass	1x15W A-19/medium	120V	5703411274248	5741913024
MOS-P	8.1 IN	Matt White Opal Glass	1x15W A-19/medium	120V	5703411274279	5741913037
MOS-P	9.8 IN	Matt White Opal Glass	1x15W A-19/medium	120V	5703411274309	5741913040

OE QUASI LIGHT

Pendants

Designer: Olafur Eliasson


Description: The pendant has 12 LEDs embedded in the inner vertices of the geometric frame that are connected to light guides along the inner edges, creating an even illumination towards the reflector in the center of the lamp. This layered white core reflects the light spherically back into the room, resulting in glare-free and uniform light.

Finish: Clear lacquered, pickled aluminum. Matte white reflector.

Material: Frame: Aluminum. Reflector: Injection molded polycarbonate

Mounting: Suspension type: 1x stainless steel aircraft cable. Canopy: White.
Cord type: 2-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Compliance: Compliance: cULus, Damp location.

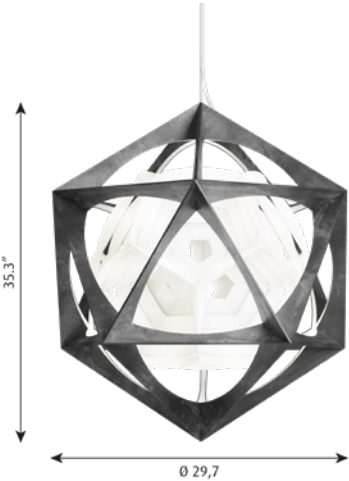

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	EAN	ORDER NO.
OEQ-P	33.1 IN	Dark Aluminium	LED 2700K 118W	DIM 0-10V	2950	120-277V/60HZ	5714693152797	10000149807
OEQ-P	33.1 IN	Dark Aluminium	LED 3000K 118W	DIM 0-10V	3085	120-277V/60HZ	5714693152780	10000149808

PATERA

Pendants

Designer: Øivind Slaatto

Description: This spherical pendant emits a glare-free glow of light, which is reflected by the small diamond-shaped cells that comprise the fixture. The lamp's structure ensures that the light is glare-free from above 45 degrees while also allowing the fixture to emit a downwardly directed light as well as an upward radiance, illuminating the ceiling to lend further ambiance to its surroundings. Each cell shapes the light by creating soft transitions between direct and reflected light to emphasize the pendant's remarkably radiant sphere.

Finish: White, matte-coated.


Material: Shade: Cut, matte, PVC foil.

Suspension: Matte-chromed aluminum and die-cast acrylic.

Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG white PVC power cord. Cord length: 12'. LED variants include 1x stainless steel aircraft cable.

Weight: Max 15 lbs.

Compliance: cULus, Damp location.

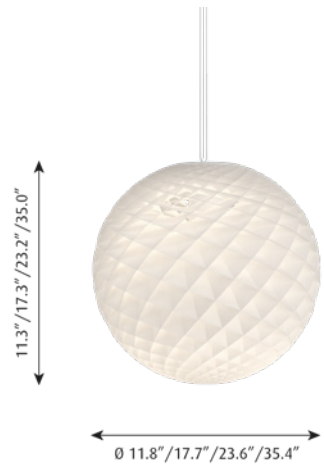

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PATE-P	11.8 IN	White	1x15W A-19/IF medium US			120V		5714693424962	5741934142
PATE-P	17.7 IN	White	1x100W A-19/IF medium US			120V	White fabric cord	5703411175255	5741925151
PATE-P	17.7 IN	White	LED 2700K 42W	DIM 0-10V	2307	120-277V/60HZ	White fabric cord	5714693500376	5741935138
PATE-P	17.7 IN	White	LED 3000K 42W	DIM 0-10V	2411	120-277V/60HZ	White fabric cord	5714693500413	5741935141
PATE-P	23.6 IN	White	1x200W A-23W/IF medium US			120V	White fabric cord	5703411175224	5741925216
PATE-P	23.6 IN	White	LED 2700K 65W	DIM 0-10V	3731	120-277V/60HZ	White fabric cord	5703411173534	5741925229
PATE-P	23.6 IN	White	LED 3000K 65W	DIM 0-10V	3907	120-277V/60HZ	White fabric cord	5703411175446	5741925232
PATE-P	35.4 IN	White	1x200W A-23W/IF medium US			120V	White fabric cord	5714693247554	10000149361
PATE-P	35.4 IN	White	LED 2700K 97W	DIM 0-10V	4291	120-277V/60HZ	White fabric cord	5714693247561	10000149264
PATE-P	35.4 IN	White	LED 3000K 97W	DIM 0-10V	4470	120-277V/60HZ	White fabric cord	5714693130467	10000149362

PATERA OVAL

Pendants

Designer: Øivind Slaatto

Description: The pendant is a glowing ellipsoid made up of diamond-shaped cells. Each cell has been carefully designed to capture light and to conceal the light source when viewed from angles above 40 degrees. Below 40 degrees, the lamp provides direct, downward light. The round opening underneath provides direct light with a soft transition toward the reflected light. The pendant can be used with or without a diffuser plate, depending on whether or not the view of the light source creates an unwanted glare.

Finish: White, matte coated.

Material: Shade: matte PVC sheet. Frame: White, opal, matte-coated injection-molded polycarbonate with steel reinforcing rods. Stem: aluminum. LED: Aluminum heatsink. Bottom diffuser: Injection-molded opal white acrylic.

Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG white cloth-covered power cord. Cord length: 12'. LED: Canopy contains driver.

Weight: Max. 3.4 kg

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PATEO-P	19.7 IN	White Matt	1x22W E26			120V	White fabric cord	5714693884322	5741936014
PATEO-P	19.7 IN	White Matt	LED 2700K 41W	DIM 0-10V	2553	120-277V/60HZ	White fabric cord	5714693884049	5741936069
PATEO-P	19.7 IN	White Matt	LED 3000K 41W	DIM 0-10V	2656	120-277V/60HZ	White fabric cord	5714693884001	5741936072

PH 2/1 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture design is based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand-blown, opal, three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and uniform light distribution.

Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Shades: Handblown white opal glass (sandblasted on the undersides for uniform light distribution). Suspension: Black metalized or high lustre chrome plated, spun aluminum.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG black PVC power cord. Cord length: 12'.

Weight: Max: 2 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH21-P	Black Metallised	1x20W G16.5/IF Candelabra US	120V	Black fabric cord	5703411175415	5741925300
PH21-P	Brass Metallised	1x20W G16.5/IF Candelabra US	120V	White fabric cord	5703411187760	5741925575
PH21-P	High Lustre Chrome Plated	1x20W G16.5/IF Candelabra US	120V	Black fabric cord	5703411188743	5741925588

PH 2/1 STEM FITTING

Pendants

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of handblown opal three-layer glass, which is glossy on the top and sandblasted matte on the underside, giving a soft and diffused light distribution.

Finish: High lustre chrome plated. White opal glass.

Material: Shades: Handblown white opal glass.
Body: High lustre chrome plated, brass.
Socket cover: High lustre chrome plated, spun aluminum.

Mounting: Canopy: White.
Cord length: 12'.
Cord type: 3-conductor, 18 AWG black braided fabric covered power cord.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH21-SF-P	High Lustre Chrome Plated	3x10W G16.5/IF Candelabra US	120V	Black fabric cord	5714693076970	5741939590

PH 3/2 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and uniform light distribution.

Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Shades: Hand blown white opal glass. Suspension: Black metalized or high lustre chrome plated, brass.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG black PVC power cord. Cord length: 12'.

Weight: Max: 4 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH32-P	Black Metallised	1x15W A-19/medium	120V	Black fabric cord	5714693502097	5741935484
PH32-P	Brass Metallised	1x15W A-19/medium	120V	White fabric cord	5714693502134	5741935497
PH32-P	High Lustre Chrome Plated	1x15W A-19/medium	120V	Black fabric cord	5714693502059	5741935471
SPAREPART						ORDER NO.
PH 3/2 pendant top shade glass						5741085091
FINGER SCREW MCP M3X11 (3PCS) LOWER						5744611158

PH 3/3 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture emits a comfortable, diffused, glare-free light that is characteristic of Poul Henningsen's reflective three-shade-system. The fixture is available with white opal glass or soft-touch black-painted metal with a white interior. The translucent shades in triple-layered, hand-blown opal glass create a warm glow around the pendant, whereas the metal shades with their white-painted interiors reflect a fine and primarily downwardly directed light. An optional translucent opal diffuser (included) is easy to insert for an even softer light distribution.

Finish: Shades: White opal glass or soft -touch black-painted with white interior.
Suspension: matte-black, powder-coated. Canopy: White.

Material: Shades: Mouth-blown white opal glass or spun aluminium.
Bottom diffuser: Frosted glass.
Suspension: Aluminium.
Canopy: Aluminium.

Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG black cloth-covered power cord. Cord length: 12 feet.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	SHADE	CABLE	EAN	ORDER NO.
PH33-P	Metal Black	1x15W A-19/medium		Black fabric cord	5714693238613	5741940424
PH33-P	Metal Black/Opal Glass	1x15W A-19/medium		Black fabric cord	5714693238637	5741940437
PH33-P	White Opal Glass	1x15W A-19/medium	Glass	Black fabric cord	5714693238606	5741940411
SPAREPART						ORDER NO.
PH 3/2 pendant top shade glass						5741085091
PH 3½-3 glass lower shade						5741094781
PH 3/3 glass middle shade						5741106572
PH 3-3 PENDANT UPPER SHADE 03 BLK METAL						5741106585
PH 3-3 PENDANT MIDDLE SHADE M3 BLK METAL						5741106598
PH 3-3 PENDANT LOWER SHADE U3 BLK METAL						5741106608
PH 3-3/PH 5-5 PENDANT CANOPY V2						5741109498

PH 3½-3 GLASS PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and uniform light distribution.

Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Shades:Hand blown white opal glass. Suspension: Black metalized or high lustre chrome plated, brass.

Mounting: Canopy: Black. Cord type: 3-conductor, 18 AWG black PVC power cord. Cord length: 12’.

Weight: Max: 5 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH3½-3-P	Black Metallised	1x15W A-19/medium	120V	Black fabric cord	5714693092567	5741919976
PH3½-3-P	Brass Metallised	1x15W A-19/medium	120V	White fabric cord	5703411096260	5741919675
PH3½-3-P	High Lustre Chrome Plated	1x15W A-19/medium	120V	Black fabric cord	5714693092604	5741919989
SPAREPART						ORDER NO.
PH 3½-3 glass lower shade						5741094781
PH 3½-3, MIDDLE SHADE, GLASS						5741094794
PH 3½-3 PENDANT TOP SHADE GLASS						5741099346

PH 3½-3 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture is 100% glare-free, with a design based on the principle of a reflective three-shade system, which directs most of the light downwards. The shades are made of deep drawn aluminum with white inner surface that ensures gentle, downward light distribution. The downward light is both soft and pleasant.

Finish: Shade: red, green, yellow and white, powder coated. Suspension: silk matte brown, copper.

Material: Shades: deep drawn aluminum. Suspension: silk matte brown, copper.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH3½3-P	Green	1x15W A-19/medium	120V	White fabric cord	5714693093205	5741928653
PH3½3-P	Red	1x15W A-19/medium	120V	White fabric cord	5714693093168	5741928640
PH3½3-P	White	1x15W A-19/medium	120V	White fabric cord	5714693093243	5741928666
PH3½3-P	Yellow	1x15W A-19/medium	120V	White fabric cord	5714693093120	5741928637

PH 4/3 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure uniform, comfortable light distribution.

Finish: White, powder coated.

Material: Shades: Spun aluminum.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 3 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH43-P	White	1x15W A-19/medium	120V	White fabric cord	5714693092963	5741928598
SPAREPART						ORDER NO.
PH 4-3, COVER PLATE, WHITE						5741086841

PH 4½-4 GLASS PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and uniform light distribution.

Finish: High lustre chrome plated. White opal glass.

Material: Shades: Hand blown white opal glass. Suspension: High lustre chrome plated, extruded aluminum.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG black PVC power cord. Cord length: 12'.

Weight: Max: 12 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH4½3½-P	High Lustre Chrome Plated	1x22W A-21/medium	120V	Black cord	5703411001943	5741902381
SPAREPART						ORDER NO.
FINGER SCREW MCP M3X11 (3PCS) LOWER						5744611158

PH 5

Pendants

Designer: Poul Henningsen

Description: The fixture provides a comfortable, glare-free light based on the principle of Poul Henningsen's reflective three-shade system, which directs the majority of the light downward. It emits a lateral light as well as illuminating itself, providing a soft radiance from within its core.

The lower shade is fitted with a frosted-glass diffuser to ensure that the downwardly directed light is 100% glare-free.

Finish: White Classic or White Modern: Matt powder coated.

Monochrome Pale Rose, Monochrome Oyster Grey, Monochrome Black, Monochrome Blue or Monochrome White: Matt, wet painted.

Pastels Oyster Blue Rose or Pastels Blue Rose Peach: Matt wet painted.

Hues of Blue, Hues of Green, Hues of Grey, Hues of Orange, Hues of Red, Hues of Rose: Matt wet painted.

Metal variants: Polished Brass or Copper: Matt, powder coated.

Please note that the copper and brass surface is untreated. This means that the surface will change over time and develop a patina.

Material: Lower shade: Spun steel.

Other shades and anti-glare disc: Spun aluminium, spun copper or spun brass.


Struts: Rolled aluminium.

Diffuser: Frosted glass.

Mounting: Canopy and cord: Black for Monochrome Black, White for all other colors. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet.

Weight: Max. 2.5 kg.

Compliance: cULus, Damp location.

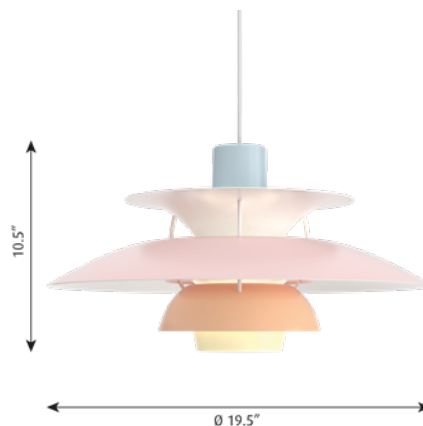

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH5-P	Brass	1x22W A-21/medium	120V	White fabric cord	5703411061893	5741919277
PH5-P	Copper	1x22W A-21/medium	120V	White fabric cord	5703411766316	5741918090
PH5-P	Hues of Blue	1x22W A-21/medium	120V	White fabric cord	5703411766354	5741918087
PH5-P	Hues of Green	1x22W A-21/medium	120V	White fabric cord	5703411766392	5741918074
PH5-P	Hues of Grey	1x22W A-21/medium	120V	White fabric cord	5703411766514	5741918045
PH5-P	Hues of Orange	1x22W A-21/medium	120V	White fabric cord	5703411766477	5741918058
PH5-P	Hues of Red	1x22W A-21/medium	120V	White fabric cord	5703411766439	5741918061
PH5-P	Hues of Rose	1x22W A-21/medium	120V	White fabric cord	5703411766552	5741918032
PH5-P	Monochrome Black	1x22W A-21/medium	120V	Black fabric cord	5714693451609	5741934854
PH5-P	Monochrome Blue	1x22W A-21/medium	120V	White fabric cord	5714693427192	5741934207
PH5-P	Monochrome Oyster Grey	1x22W A-21/medium	120V	White fabric cord	5714693153596	5741940097
PH5-P	Monochrome Pale Rose	1x22W A-21/medium	120V	White fabric cord	5714693153466	5741940042
PH5-P	Monochrome White	1x22W A-21/medium	120V	White fabric cord	5714693426713	5741934304
PH5-P	Pastels Blue Rose Peach	1x22W A-21/medium	120V	White fabric cord	5714693154258	5741940149
PH5-P	Pastels Oyster Blue Rose	1x22W A-21/medium	120V	White fabric cord	5714693154890	5741940194
PH5-P	White Classic	1x22W A-21/medium	120V	White fabric cord	5703411766231	5741918113
PH5-P	White Modern	1x22W A-21/medium	120V	White fabric cord	5703411766279	5741918100
SPAREPART						ORDER NO.
PH 5 glass disc						5741093300
PH 5 Purple spacers						5741093407
PH 5 Bronze spacers						5741100235
PH 5 White spacers						5741100248
PH 5 Monochrome White spacers						5741106093
PH 5 Monochrome Blue spacers						5741106103
PH 5 Monochrome Black spacers						5741106116

PH 5 ANNIVERSARY

Pendants

Designer: Poul Henningsen

Description: The fixture provides a comfortable, glare-free light based on the principle of Poul Henningsen's reflective three-shade system, which directs the majority of the light downward. It emits a lateral light as well as illuminating itself, providing a soft radiance from within its core. The lower shade is fitted with a frosted-glass diffuser to ensure that the downwardly directed light is 100% glare-free.


Finish: White wet painted outside and pale rose powder coated inner side. Brass metallised.

Material: Shades: Spun aluminum.
White and pale rose matt lacquered.
Anti-glare shade: Pale rose.
Struts: Brass metallised, rolled aluminium.

Mounting: Suspension: Cord 2x1 mm².
Cord length: 3 m.
Canopy: White.

Weight: Max. 2.5 kg.

Compliance: cULus, Damp location.

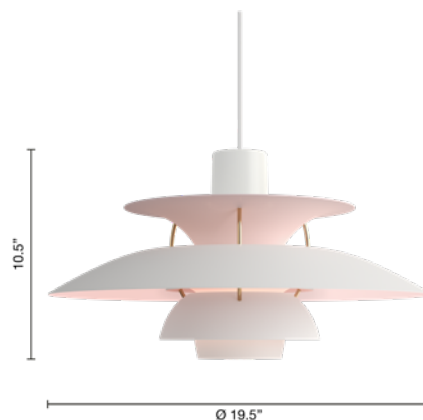

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH5-ANN-P	Matte White/Pale Rose	A-21/medium	120V	White fabric cord	5714693358939	5741942613
SPAREPART						ORDER NO.
PH 5 Brass Metallised spacers						5741108305

PH 5 MINI

Pendants

Designer: Poul Henningsen

Description: The fixture provides 100% glare-free light. Its design is based on the principle of a reflective three-shade system that directs most of the light downward. The fixture emits both downward and lateral light, thus illuminating itself.

Finish: Classic (white) or Modern White: Matte powder-coated.

Monochrome Black, Monochrome Blue, Monochrome White, Hues of Blue, Hues of Green, Hues of Gray, Hues of Orange, Hues of Red, Hues of Rose: Matte wet-painted.


Metal versions: Polished brass or copper and white, matte powder-coated. Please note that the copper and brass surfaces are untreated. This means that the surfaces will change over time and develop a patina.

Material: Shades and anti-glare disc: Spun aluminum, spun copper or spun brass. Struts: rolled aluminum.

Mounting: Canopy and cord: Black for Monochrome Black, White for all other colors. Cord type: 3-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet.

Weight: Max. 0.9 kg.

Compliance: cULus, Damp location.

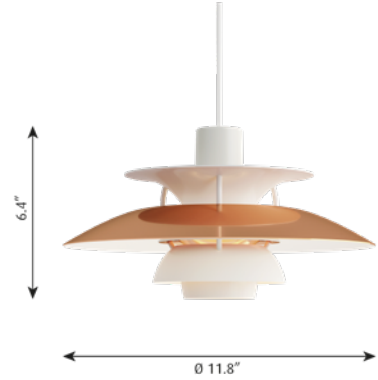

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PHSM-P	Brass	1x10W A-15/medium	120V	White fabric cord	5703411061770	5741919251
PHSM-P	Copper	1x10W A-15/medium	120V	White fabric cord	5703411765753	5741918223
PHSM-P	Hues of Blue	1x10W A-15/medium	120V	White fabric cord	5703411660942	5741917457
PHSM-P	Hues of Green	1x10W A-15/medium	120V	White fabric cord	5703411161210	10000142115
PHSM-P	Hues of Grey	1x10W A-15/medium	120V	White fabric cord	5703411127209	10000142116
PHSM-P	Hues of Orange	1x10W A-15/medium	120V	White fabric cord	5703411161203	10000142117
PHSM-P	Hues of Red	1x10W A-15/medium	120V	White fabric cord	5703411127148	10000142118
PHSM-P	Hues of Rose	1x10W A-15/medium	120V	White fabric cord	5703411127117	10000142119
PHSM-P	Monochrome Black	1x10W A-15/medium	120V	Black fabric cord	5714693452262	5741934906
PHSM-P	Monochrome Blue	1x10W A-15/medium	120V	White fabric cord	5714693426478	5741934359
PHSM-P	Monochrome White	1x10W A-15/medium	120V	White fabric cord	5714693425990	5741934456
PHSM-P	White Classic	1x10W A-15/medium	120V	White fabric cord	5703411127322	10000142110
PHSM-P	White Modern	1x10W A-15/medium	120V	White fabric cord	5703411161234	10000142113

PH 5/5 PENDANT

Pendants

Designer: Poul Henningsen

Description: The fixture emits a comfortable, diffused, glare-free light that is characteristic of Poul Henningsen's reflective three-shade-system. The fixture is available with white opal glass or soft-touch black-painted metal with a white interior. The translucent shades in triple-layered, hand-blown opal glass create a warm glow around the pendant, whereas the metal shades with their white-painted interiors reflect a fine and primarily downwardly directed light. An optional translucent white diffuser (included) is easy to insert for an even softer light distribution.

Finish: Shades: White opal glass or soft -touch black-painted with white interior. Suspension: matte-black, powder-coated. Canopy: White.

Material: Shades: Hand-blown white opal glass or spun aluminum. Bottom diffuser: Frosted glass. Suspension: aluminum.

Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG black cloth-covered power cord. Cord length: 12 feet. Incandescent variants have a canopy of flat cone profile, 5.3 IN diameter x 1 IN tall. LED variants have a canopy of dome profile, 9.4 IN diameter x 4.3 IN tall. LED variants have an electronic, constant current, class II driver for 120-277V power supply housed inside canopy.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LIGHTING CONTROL	CABLE	EAN	ORDER NO.
PH55-P	Metal Black	1x22W A-21/medium		Black fabric cord	5714693238798	5741940521
PH55-P	Metal Black	LED 3000-1600K D2W	DIM 1-10V	Black fabric cord	5714693353378	5741942859
PH55-P	Metal Black	LED 3000-1600K D2W	PHASE DIMMING (MAINS DIMM)	Black fabric cord	5714693353347	5741942833
PH55-P	Metal Black	LED 3000K	DIM 1-10V	Black fabric cord	5714693353316	5741942817
PH55-P	Metal Black	LED 3000K	PHASE DIMMING (MAINS DIMM)	Black fabric cord	5714693353293	5741942794
PH55-P	Metal Black/Opal Glass	1x22W A-21/medium		Black fabric cord	5714693238965	5741940534
PH55-P	Metal Black/Opal Glass	LED 3000-1600K D2W	DIM 1-10V	Black fabric cord	5714693353385	5741942862
PH55-P	Metal Black/Opal Glass	LED 3000-1600K D2W	PHASE DIMMING (MAINS DIMM)	Black fabric cord	5714693353354	5741942846
PH55-P	Metal Black/Opal Glass	LED 3000K	DIM 1-10V	Black fabric cord	5714693353323	5741942820
PH55-P	Metal Black/Opal Glass	LED 3000K	PHASE DIMMING (MAINS DIMM)	Black fabric cord	5714693353309	5741942804
SPAREPART						ORDER NO.
PH 5/5 glass middle shade						5741106640
PH 5/5 glass lower shade						5741106653
PH 5-5 PENDANT UPPER SHADE 05 BLK METAL						5741106666
PH 5-5 PENDANT MIDDLE SHADE M5 BLK METAL						5741106679
PH 5-5 PENDANT LOWER SHADE U5 BLK METAL						5741106682
PH 5-5 PENDANT SHADEHOLDER BLK METAL						5741106695
PH 5-5 PENDANT SHADEHOLDER LED BLK METAL						5741106705
PH 5-5 PEND SHADE SCREW W NUT BLK (3PCS)						5741106718
PH 5-5 PEND LED DIFFUSER SHIELD						5741106734
PH 5-5 PEND LED REPL KIT 27K						5741108839
PH 5-5 PEND LED REPL KIT 3K						5741108842
PH 5-5 PEND LED REPL KIT D2W						5741108855
PH 5-5 PENDANT SHADEHOLDER BLK METAL V2						5741109469
PH 5-5 PENDANT SHADEHOLD LED BLK MET V2						5741109472
PH 5-5 PEND SHADE SCREW W NUT BLK 3PC V2						5741109485
PH 3-3/PH 5-5 PENDANT CANOPY V2						5741109498

PH 5-4½ & PH 6½-6

Pendants

Designer: Poul Henningsen

Description: The trumpet-shaped top shade provides illumination of the area above the three lower shades, which primarily direct the light downwards. A base reflector and a blue glare ring protect against glare from all angles. The strongest light is directly under the fixture. The shades have a matte white painted finish to ensure very comfortable lighting.

Finish: White.

Material: Shades: Spun aluminum. Struts: Rolled aluminum.

Mounting: Suspension type: 1x stainless steel aircraft cable (PH 6½-6). Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 21 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHCHAR-P	5-4½	White	LED 3000-1800K D2W 44W	DIM 0-10V	1446	120-277V/60HZ	White fabric cord	5714693152261	10000149869
PHCHAR-P	5-4½	White	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	1446	120V	White fabric cord	5714693152254	10000149870
PHCHAR-P	5-4½	White	LED 3000K 44W	DIM 0-10V	1755	120-277V/60HZ	White fabric cord	5714693152285	10000149867
PHCHAR-P	5-4½	White	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	1755	120V	White fabric cord	5714693152278	10000149868
PHCHAR-P	6½-6	White	LED 2700K 96W	DIM 0-10V	4420	120-277V/60HZ	White fabric cord	5714693093366	5741928695
PHCHAR-P	6½-6	White	LED 3000K 96W	DIM 0-10V	4420	120-277V/60HZ	White fabric cord	5714693115587	5741938698
SPAREPART									ORDER NO.
BOTTOM ASSEMBLY COMPLETE PH 5-4½									5741481815

PH ARTICHOKE

Pendants

Designer: Poul Henningsen

Description: The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture as well as emitting diffused light with a unique pattern. The fixture provides decorative and comfortable lighting. For the energy saving LED variant, the quality of light and atmosphere surrounding the product is kept at the highest level.

Finish: Brass, copper or stainless steel, brushed and coated.
Black, powder coated with white, wet painted inner side.
White, wet painted.

Material: Leaves: Punched brass, punched copper or laser cut stainless steel.
Top shade: White, spun steel.
Frame: High luster chrome plated, laser cut steel.
Suspension: High lustre chrome plated, spun aluminum.

Mounting: Mounting: Suspension type: 3x stainless steel aircraft cables.
Suspension length: 12'. Canopy: White. Cord type: 3-conductors (non-LED) / 2-conductors (LED), 18 AWG white PVC power cord. Cord color: white cord.
Cord length: 12'.

Weight: Max: 61 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHA-P	18.9 IN	Black	1x200W A-23W/IF medium US			120V	White cord	5703411161029	10000146919
PHA-P	18.9 IN	Black	LED 3000-1800K D2W 44W	DIM 0-10V	641	120-277V/60HZ	White cord	5714693345984	10000151300
PHA-P	18.9 IN	Black	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	641	120V	White cord	5714693345977	10000151301
PHA-P	18.9 IN	Black	LED 3000K 44W	DIM 0-10V	779	120-277V/60HZ	White cord	5714693346004	10000151298
PHA-P	18.9 IN	Brass	1x200W A-23W/IF medium US			120V	White cord	5703411126486	10000144752
PHA-P	18.9 IN	Brass	LED 3000-1800K D2W 44W	DIM 0-10V	800	120-277V/60HZ	White cord	5714693152889	10000149886
PHA-P	18.9 IN	Brass	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	800	120V	White cord	5714693152834	10000149891
PHA-P	18.9 IN	Brass	LED 3000K 44W	DIM 0-10V	971	120-277V/60HZ	White cord	5714693152988	10000149876
PHA-P	18.9 IN	Copper	1x200W A-23/CL medium US			120V	White cord	5703411149973	6149904759
PHA-P	18.9 IN	Copper	LED 3000-1800K D2W 44W	DIM 0-10V	894	120-277V/60HZ	White cord	5714693152872	10000149887
PHA-P	18.9 IN	Copper	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	894	120V	White cord	5714693152827	10000149892
PHA-P	18.9 IN	Copper	LED 3000K 44W	DIM 0-10V	1085	120-277V/60HZ	White cord	5714693152971	10000149877
PHA-P	18.9 IN	Stainless Steel	1x200W A-23/CL medium US			120V	White cord	5703411153000	5847901266
PHA-P	18.9 IN	Stainless Steel	LED 3000-1800K D2W 44W	DIM 0-10V	800	120-277V/60HZ	White cord	5714693152896	10000149885
PHA-P	18.9 IN	Stainless Steel	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	800	120V	White cord	5714693152841	10000149890
PHA-P	18.9 IN	Stainless Steel	LED 3000K 44W	DIM 0-10V	971	120-277V/60HZ	White cord	5714693152995	10000149875
PHA-P	18.9 IN	White	1x200W A-23/CL medium US			120V	White cord	5703411153031	5847901263
PHA-P	18.9 IN	White	LED 3000-1800K D2W 44W	DIM 0-10V	1208	120-277V/60HZ	White cord		10000149889
PHA-P	18.9 IN	White	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	1208	120V	White cord	5714693152803	10000149894
PHA-P	18.9 IN	White	LED 3000K 44W	DIM 0-10V	1466	120-277V/60HZ	White cord	5714693152957	10000149879
PHA-P	23.6 IN	Black	LED 2700K 96W	DIM 0-10V	2037	120-277V/60HZ	White cord	5714693346011	10000151297
PHA-P	23.6 IN	Black	LED 3000K 96W	DIM 0-10V	2119	120-277V/60HZ	White cord	5703411124055	10000146921
PHA-P	23.6 IN	Brass	LED 2700K 96W	DIM 0-10V	2621	120-277V/60HZ	White cord	5703411126455	10000144753
PHA-P	23.6 IN	Brass	LED 3000K 96W	DIM 0-10V	2726	120-277V/60HZ	White cord	5703411126424	10000144754

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHA-P	23.6 IN	Copper	LED 2700K 96W	DIM 0-10V	2621	120-277V/60HZ	White cord	5703411134108	10000130395
PHA-P	23.6 IN	Copper	LED 3000K 96W	DIM 0-10V	2726	120-277V/60HZ	White cord	5703411134016	10000130399
PHA-P	23.6 IN	Stainless Steel	LED 2700K 96W	DIM 0-10V	2387	120-277V/60HZ	White cord	5703411134139	10000130393
PHA-P	23.6 IN	Stainless Steel	LED 3000K 96W	DIM 0-10V	2484	120-277V/60HZ	White cord	5703411134047	10000130397
PHA-P	23.6 IN	White	LED 2700K 96W	DIM 0-10V	3631	120-277V/60HZ	White cord	5703411134078	10000130396
PHA-P	23.6 IN	White	LED 3000K 96W	DIM 0-10V	3777	120-277V/60HZ	White cord	5703411133989	10000130400
PHA-P	28.3 IN	Black	LED 2700K 96W	DIM 0-10V	3362	120-277V/60HZ	White cord	5703411124024	10000146922
PHA-P	28.3 IN	Black	LED 3000K 96W	DIM 0-10V	3362	120-277V/60HZ	White cord	5703411123997	10000146923
PHA-P	28.3 IN	Brass	LED 2700K 96W	DIM 0-10V	3030	120-277V/60HZ	White cord	5703411126394	10000144755
PHA-P	28.3 IN	Brass	LED 3000K 96W	DIM 0-10V	3152	120-277V/60HZ	White cord	5703411126363	10000144756
PHA-P	28.3 IN	Copper	LED 2700K 96W	DIM 0-10V	3030	120-277V/60HZ	WHT	5703411127629	10000141076
PHA-P	28.3 IN	Copper	LED 3000K 96W	DIM 0-10V	3152	120-277V/60HZ	White cord	5703411134283	10000128781
PHA-P	28.3 IN	Stainless Steel	LED 2700K 96W	DIM 0-10V	2630	120-277V/60HZ	WHT	5703411155707	10000141065
PHA-P	28.3 IN	Stainless Steel	LED 3000K 96W	DIM 0-10V	2736	120-277V/60HZ	White cord	5703411134313	10000128780
PHA-P	28.3 IN	White	LED 2700K 96W	DIM 0-10V	3538	120-277V/60HZ	WHT	5703411127568	10000141079
PHA-P	28.3 IN	White	LED 3000K 96W	DIM 0-10V	3681	120-277V/60HZ	White cord	5703411134252	10000128782
PHA-P	33.1 IN	Black	LED 2700K 96W	DIM 0-10V	3362	120-277V/60HZ	White cord	5703411123966	10000146924
PHA-P	33.1 IN	Black	LED 3000K 96W	DIM 0-10V	3362	120-277V/60HZ	White cord	5703411123935	10000146925
PHA-P	33.1 IN	Brass	LED 2700K 96W	DIM 0-10V	3152	120-277V/60HZ	White cord	5703411126332	10000144757
PHA-P	33.1 IN	Brass	LED 3000K 96W	DIM 0-10V	3030	120-277V/60HZ	White cord	5703411126301	10000144758
PHA-P	33.1 IN	Copper	LED 2700K 96W	DIM 0-10V	3030	120-277V/60HZ	WHT	5703411127506	10000141082
PHA-P	33.1 IN	Copper	LED 3000K 96W	DIM 0-10V	3152	120-277V/60HZ	White cord	5703411161425	10000128784
PHA-P	33.1 IN	Stainless Steel	LED 2700K 96W	DIM 0-10V	2630	120-277V/60HZ	WHT	5703411127537	10000141080
PHA-P	33.1 IN	Stainless Steel	LED 3000K 96W	DIM 0-10V	2736	120-277V/60HZ	White cord	5703411134221	10000128783
PHA-P	33.1 IN	White	LED 2700K 96W	DIM 0-10V	3538	120-277V/60HZ	WHT	5703411127445	10000141084
PHA-P	33.1 IN	White	LED 3000K 96W	DIM 0-10V	3681	120-277V/60HZ	White cord	5703411134160	10000128785

PH ARTICHOKE ANNIVERSARY

Pendants

Designer: Poul Henningsen

Description: The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture as well as emitting diffused light with a unique pattern. The fixture provides decorative and comfortable lighting. For the energy saving LED variant, the quality of light and atmosphere surrounding the product is kept at the highest level.

Finish: White powder coated outside and pale rose wet painted inner side. Brass metallised.

Material: Leaves: Laser cut steel.

Top shade: White outside with pale rose inner side, spun steel.

Suspension: White.

Frame: Brass metallised, laser cut steel.

Mounting: E27 Suspension:

4 m. Cord 3 x 0,75 mm² & wire.

Canopy: White.

LED Suspension:

4 m. Cord 2 x 1 mm² and wire.

Canopy: White LED with driver.

Weight: Max: 31 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	CABLE	EAN	ORDER NO.
PHA-AMM-P	18.9 IN	Matte White/Pale Rose	E26	White fabric cord and wire	5714693371983	5741943159
PHA-AMM-P	23.6 IN	Matte White/Pale Rose	E26	White fabric cord and wire	5714693372041	5741943201

PH ARTICHOKE GLASS

Pendants

Designer: Poul Henningsen

Description: The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture, as well as emit diffused light with a unique pattern. Reflection from the light source is diffused in the sandblasted lower surfaces, and this light is reflected decoratively in the top surfaces, giving the fixture a unique glow. The surface treatment on the glass leaves eliminates direct glare. For the energy saving LED variant, the quality of light and atmosphere surrounding the product is kept at the highest level.

Finish: Clear glass, sandblasted.

Material: Leaves: Clear glass, sandblasted. Top shade: High lustre chrome plated or white, spun brass. Frame: High lustre chrome plated, laser cut brass. Suspension: High lustre chrome plated, spun aluminum.

Mounting: Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'. Canopy: White. Cord type: 3-conductors (non-LED) / 2-conductors (LED), 18 AWG white PVC power cord. Cord color: white cord, except for copper non-LED variants have black cord. Cord length: 12'.

Weight: Max: 72 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHAG-P	18.9 IN	Clear Glass Sand-blasted	1x200W A-23/CL medium US			120V	White cord	5703411152737	5847901441
PHAG-P	23.6 IN	Clear Glass Sand-blasted	LED 2700K 59W	DIM 0-10V	4811	120-277V/60HZ	White cord	5703411133958	10000130401
PHAG-P	23.6 IN	Clear Glass Sand-blasted	LED 3000K 59W	DIM 0-10V	5005	120-277V/60HZ	White cord	5703411133927	10000130402
PHAG-P	28.3 IN	Clear Glass Sand-blasted	LED 2700K 96W	DIM 0-10V	7462	120-277V/60HZ	White cord	5703411127414	10000141085
PHAG-P	28.3 IN	Clear Glass Sand-blasted	LED 3000K 96W	DIM 0-10V	7762	120-277V/60HZ	White cord	5703411134375	10000128777
PHAG-P	33.1 IN	Clear Glass Sand-blasted	LED 2700K 96W	DIM 0-10V	7462	120-277V/60HZ	White cord	5703411155684	10000141086
PHAG-P	33.1 IN	Clear Glass Sand-blasted	LED 3000K 96W	DIM 0-10V	7762	120-277V/60HZ	White cord	5703411134344	10000128778

PH LOUVRE

Pendants

Designer: Poul Henningsen

Description: The fixture provides 100% glare-free light. The geometrical, spherical design is based on the principle of illuminating all surfaces at the same angle. This ensures uniform light around the fixture, illuminating both walls and ceiling. Matte painted undersurfaces and glossy top surfaces result in an attractive reflection of the diffused light, creating uniform light distribution around the fixture.

Finish: White, wet painted.

Material: Shades: Spun aluminum. Frame: High lustre chrome plated, extruded brass. Housing: High lustre chrome plated, spun aluminum.

Mounting: Suspension type: 1x stainless steel aircraft cable. Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 26 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHL-P	White	LED 2700K 97W	DIM 0-10V	2596	120-277V/60HZ	WHT	5703411751954	5741917910
PHL-P	White	LED 3000K 97W	DIM 0-10V	2596	120-277V/60HZ	WHT	5703411751992	5741917923

PH SEPTIMA

Pendants

Designer: Poul Henningsen

Description: The seven-shade glass crown emits a glare-free, downwardly directed light while radiating a pleasantly delicate glow. Frosted glass fields alternately cover the clear ones from shade-to-shade, thus diffusing the light even more softly.

Finish: Clear glass with sandblasted fields. Untreated satin-polished brass.

Material: Shades: Clear glass with sandblasted fields. Legs: Steel, metallized brass. Socket housing and canopy: Untreated satin-polished brass. Please note that the brass surface is untreated. The untreated brass will change over time and develop a patina.

Mounting: 1x stainless steel aircraft cable. Canopy: Untreated brass. Cord type: 3-conductor, 18 AWG white braided fabric covered power cord. Cord length: 12'.

Weight: Max. 7 kg

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	CABLE	EAN	ORDER NO.
PHSE-P	Clear and Matt Glass/Brass	1x22W E26	White fabric cord	5714693427635	5741934508

PH SNOWBALL

Pendants

Designer: Poul Henningsen

Description: The fixture emits comfortable glare-free diffused light. Matte painted undersurfaces and glossy top surfaces result in an attractive reflection of the diffused light, creating uniform light distribution around the fixture. When the light is switched on, the top portion is illuminated while the bottom part remains dark.


Finish: White, wet painted.

Material: Shades: Spun aluminum. Frame: High lustre chrome plated, cast aluminum. Housing: High lustre chrome plated, spun aluminum.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 8 lbs.

Compliance: cULus, Dry location.

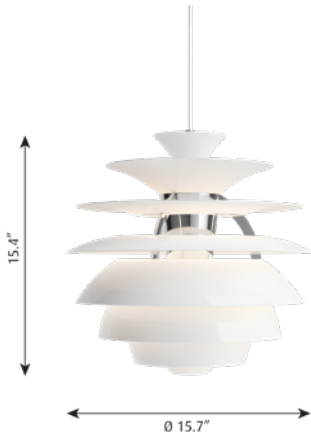

PRODUCT CODE	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PHS-P	White	1x22W A-21/medium			120V	White fabric cord	5714693092888	5741928572
PHS-P	White	LED 3000-1800K D2W 44W	DIM 0-10V	894	120-277V/60HZ	White fabric cord	5714693152223	10000149873
PHS-P	White	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	894	120V	White fabric cord	5714693152216	10000149874
PHS-P	White	LED 3000K 44W	DIM 0-10V	1085	120-277V/60HZ	White fabric cord	5714693152247	10000149871
PHS-P	White	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	1085	120V	White fabric cord	5714693152230	10000149872
SPAREPART								ORDER NO.
PH SNOWBALL, BOTTOMSHADE COMPLETE								5741086456

TOLDBOD 6.1/8.7 GLASS PENDANT

Pendants

Designer: Louis Poulsen A/S

Description: The fixture emits glare-free light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.


Finish: White opal glass.

Material: Suspension: Brushed stainless steel. Shade: Handblown white opal glass.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 4 lbs.

Compliance: cULus, Dry location.

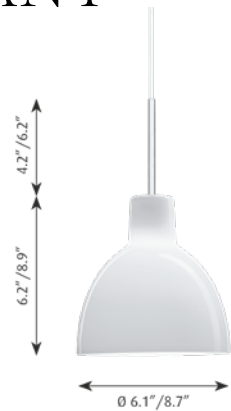

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
TOLDG-P	6.1 IN	White Opal Glass	1x10W G16.5/IF Candelabra US	120V	5703411231210	6040000008
TOLDG-P	8.7 IN	White Opal Glass	1x22W A-21/medium	120V	5703411799116	10000124350

TOLDBOD PENDANT

Pendants

Designer: Louis Poulsen A/S

Description: The pendant emits soft downwards directed light. The matte, white-painted inside of the elliptical shade helps to assure even distribution of the light.

Finish: Black, White, Light Grey or Blue-Grey, matte powder coated.

Material: Shade: Spun aluminum.
4.7" reflector: Spun white matte coated aluminum.
14.7" diffusor: Matte acrylic

Mounting: Canopy: White. Cord type: 18 AWG fabric covered power cord. Black cord for black, and blue-grey pendants, white cord for white and light grey pendants. 14.7" come with 1x stainless steel aircraft cable. Cord length: 12'.

Weight: Max: 2 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	VOLTAGE	CABLE	EAN	ORDER NO.
TOL-120-P	15.7 IN	Black	1x15W A-19/medium		120V	Black fabric cord	5714693152674	10000149819
TOL-120-P	15.7 IN	Black	LED 2700K (ra90)	DIM 0-10V	120-277V/60HZ	Black fabric cord	5714693152636	10000149823
TOL-120-P	15.7 IN	Black	LED 3000K (ra90)	DIM 0-10V	120-277V/60HZ	Black fabric cord		10000149825
TOL-120-P	15.7 IN	White	1x15W A-19/medium		120V	White fabric cord	5714693152667	10000149820
TOL-120-P	15.7 IN	White	LED 2700K (ra90)	DIM 0-10V	120-277V/60HZ	White fabric cord		10000149824
TOL-120-P	15.7 IN	White	LED 3000K (ra90)	DIM 0-10V	120-277V/60HZ	White fabric cord		10000149826
TOL-120-P	4.7 IN	Black	1x4W T-4 G9		120V	Black fabric cord	5714693153374	10000149900
TOL-120-P	4.7 IN	Blue-Grey	1x4W T-4 G9		120V	Black fabric cord	5714693153053	10000149902
TOL-120-P	4.7 IN	Light Grey	1x4W T-4 G9		120V	White fabric cord	5714693153114	10000149901
TOL-120-P	4.7 IN	White	1x4W T-4 G9		120V	White fabric cord	5714693153022	10000149904
TOL-120-P	6.7 IN	Black	1x10W G16.5/candelabra		120V	Black fabric cord	5714693152773	10000149809
TOL-120-P	6.7 IN	Blue-Grey	1x10W G16.5/candelabra		120V	Black fabric cord	5714693152759	10000149811
TOL-120-P	6.7 IN	Light Grey	1x10W G16.5/candelabra		120V	White fabric cord	5714693152766	10000149810
TOL-120-P	6.7 IN	White	1x10W G16.5/candelabra		120V	White fabric cord	5714693152735	10000149813
TOL-120-P	9.8 IN	Black	1x10W A-15/medium		120V	Black fabric cord	5714693152728	10000149814
TOL-120-P	9.8 IN	Blue-Grey	1x10W A-15/medium		120V	Black fabric cord	5714693152704	10000149816
TOL-120-P	9.8 IN	Light Grey	1x10W A-15/medium		120V	White fabric cord	5714693152711	10000149815
TOL-120-P	9.8 IN	White	1x10W A-15/medium		120V	White fabric cord	5714693152681	10000149818

VL 56 PENDANT

Pendants

Designer: Vilhelm Lauritzen

Description: The pendant emits downward directed glare-free light. The radial perforation pattern around the opening creates a softer transition between light and darkness. The perforations create a soft beautiful pattern of light both on the shade and on the surrounding surfaces.


Finish: Polished brass or chrome.Wet painted white inner side.

Material: Shade, tub and lid in polished untreated brass or chrome plated aluminium.

Mounting: Cable 0,1"x0.7" (2 x 18) AWG SVT,
White textile.
Cord length: 13,1"
Canopy: Yes.

Weight: Max. 1.1 kg.

Compliance: cULus, Dry location.

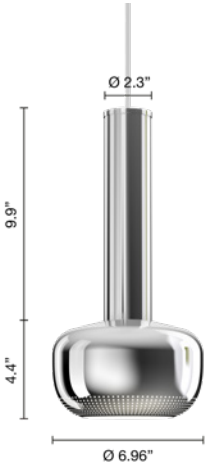

PRODUCT CODE	FINISH	LIGHT SOURCE	CABLE	EAN	ORDER NO.
VL56-P	High Lustre Chrome Plated	E26	White fabric cord	5714693178247	5741939972
VL56-P	Polished Brass	E26	White fabric cord	5714693177660	5741939927

VL RING CROWN 1

Pendants

Designer: Vilhelm Lauritzen


Description: The pendant emits light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.

Finish: Glossy, hand blown white opal glass. Satin polished brass, untreated.

Material: Shades: Hand blown, 3-layered, polished opal glass. Suspension: Untreated brass, will patinate.

Mounting: Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG cloth-covered power cord. Cord length: 12 feet.

Compliance: Compliance: cULus, Dry location.

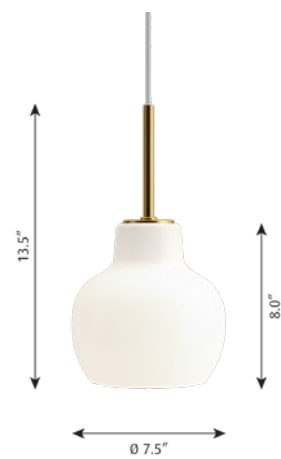

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
VLRC-1-P	Brass/Glossy Opal Glass	1x40W A-19/ medium US	120V	White fabric cord	5703411182079	5741925423
SPAREPART						ORDER NO.
VL Ring Crown wire/cord, replacement kit						5741940741

VL RING CROWN 3-5-7

Pendants

Designer: Vilhelm Lauritzen

Description: The pendant emits light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.


Finish: Glossy, hand blown white opal glass. Satin polished brass, untreated.

Material: Shades: Hand blown, 3-layered, polished opal glass. Wires: Stainless steel. Frame and canopy in untreated brass, will patinate.

Mounting: Mounting: Suspension type: 3x stainless steel aircraft cables. Suspension length: 12'. Canopy: Brass. Cord type: 3-conductors, 18 AWG white braided fabric covered cord. Cord length: 12'.

Weight: Min: 11.96 lbs Max: 22.28 lbs

Compliance: Compliance: cULus, Dry location.

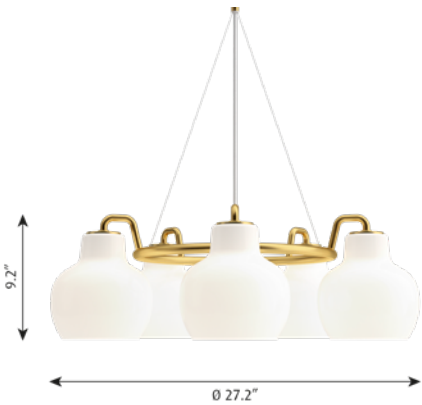

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
VLRC-357-P	3	Brass/Glossy Opal Glass	3x40W A-19/ medium US	120V	White fabric cord	5703411182062	5741925449
VLRC-357-P	5	Brass/Glossy Opal Glass	5x40W A-19/medium US	120V	White fabric cord	5703411179987	5741925465
VLRC-357-P	7	Brass/Glossy Opal Glass	7x40W A-19/Medium US	120V	White fabric cord	5703411179659	5741925481
SPAREPART							ORDER NO.
VL RING CROWN WALL/3-5-7 GLASS							5741094406
VL RING CROWN CANOPY							5741094451
VL Ring Crown wire/cord, replacement kit							5741940741

VL45 RADIOHUS PENDANT

Pendants

Designer: Vilhelm Lauritzen

Description: The fixture provides uniform, general and diffuse illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.

Finish: Glossy white opal glass. Brushed brass, untreated.

Material: Shade: Hand blown polished white opal glass. Pendant fitting: Untreated brushed brass, will patinate.

Mounting: Canopy: White. Cord type: 2-conductor, 18 AWG white braided fabric covered power cord. Cord length: 12'.

Weight: Max. : 9 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
VL45-P	14.6 IN	Brass/Glossy Opal Glass	1x22W A-21/medium			120V	White fabric cord	5714693092680	5741928527
VL45-P	14.6 IN	Brass/Glossy Opal Glass	LED 3000-1800K D2W 44W	DIM 0-10V	2763	120V	White fabric cord	5714693152537	10000149833
VL45-P	14.6 IN	Brass/Glossy Opal Glass	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	2763	120V	White fabric cord	5714693152520	10000149834
VL45-P	14.6 IN	Brass/Glossy Opal Glass	LED 3000K 44W	DIM 0-10V	3353	120V	White fabric cord	5714693152551	10000149831
VL45-P	14.6 IN	Brass/Glossy Opal Glass	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	3353	120V	White fabric cord	5714693152544	10000149832
VL45-P	6.9 IN	Brass/Glossy Opal Glass	1x10W G16.5/ candelabra			120V	White fabric cord	5703411176344	5741925326
VL45-P	9.8 IN	Brass/Glossy Opal Glass	1x22W A-21/medium			120V	White fabric cord	5714693092727	5741928530

Suspension

VL45 RADIO 250 SUSPENSION V2 US	5741928556
VL45 RADIO 370 SUSPENSION V2 US	5741928543

WOHLERT

Pendants

Designer: Vilhelm Wohler

Description: The fixture provides uniform, general and diffused illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.

Finish: White opal glass.

Material: Shade: Hand blown white opal glass. Pendant stem: Brushed steel.

Mounting: Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight: Max: 9 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
WO-P	11.8 IN	White Opal Glass	1x22W A-21/medium			120V	White cord	5703411139622	10000124355
WO-P	13.7 IN	White Opal Glass	1x22W A-21/medium			120V	White cord	5703411139592	10000124356
WO-P	13.7 IN	White Opal Glass	LED 3000-1800K D2W 44W	DIM 0-10V	3955	120-277V/60HZ	White fabric cord	5714693152476	10000149848
WO-P	13.7 IN	White Opal Glass	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	3955	120V	White fabric cord	5714693152452	10000149850
WO-P	13.7 IN	White Opal Glass	LED 3000K 44W	DIM 0-10V	3587	120-277V/60HZ	White fabric cord	5714693152513	10000149844
WO-P	13.7 IN	White Opal Glass	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	3587	120V	White fabric cord	5714693152490	10000149846
WO-P	15.7 IN	White Opal Glass	1x22W A-21/medium			120V	White cord	5703411156810	10000124357
WO-P	15.7 IN	White Opal Glass	LED 3000-1800K D2W 44W	DIM 0-10V	2981	120-277V/60HZ	White fabric cord	5714693152469	10000149849
WO-P	15.7 IN	White Opal Glass	LED 3000-1800K D2W 44W	PHASE DIMMING (MAINS DIMM)	2981	120V	White fabric cord	5714693152445	10000149851
WO-P	15.7 IN	White Opal Glass	LED 3000K 44W	DIM 0-10V	3617	120-277V/60HZ	White fabric cord	5714693152506	10000149845
WO-P	15.7 IN	White Opal Glass	LED 3000K 44W	PHASE DIMMING (MAINS DIMM)	3617	120V	White fabric cord	5714693152483	10000149847

AJ MINI ANNIVERSARY

Table lamps

Designer: Arne Jacobsen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted pale rose on the inside to ensure a soft comfortable light.

Finish: White wet painted outside and pale rose powder coated inner side.
Polished brass, untreated.

Material: Shade: Spun steel. Injection moulded zinc base.
Stem: Polished brass.
Switch: Polished brass on lamp base.

Mounting: White fabric cord with plug. Cable length: 7 ft. Light control: Switch on lamp stand.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	CABLE	EAN	ORDER NO.
AJMANN-T	Matte White/Pale Rose	E12	White cord	5714693350995	5744904027
SPAREPART					ORDER NO.
AJ UNION NUT BRASS					5744170563

AJ MINI TABLE

Table lamps

Designer: Arne Jacobsen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish: White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.

Material: Shade: Spun steel or stainless steel. Base: Die cast zinc or stainless steel. Stem: Steel or stainless steel.

Mounting: Plastic cord with plug.
Cord length: 7 ft.
Light control: Switch on lamp stand.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	CABLE	EAN	ORDER NO.
AJM-T	Black	1x10W E12	Black cord	5714693680658	5744907286
AJM-T	Dusty Blue	E12	Black cord	5714693285952	5744911308
AJM-T	Electric Orange	E12	White cord	5714693286638	5744911272
AJM-T	Pale Petroleum	1x10W E12	Black cord	5714693678334	5744907367
AJM-T	Soft Lemon	E12	White cord	5714693286508	5744911285
AJM-T	Stainless Steel Polished	1x10W G16.5/candelabra	Black cord	5714693247585	5744915663
AJM-T	Warm Grey	E12	Black cord	5714693285839	5744911311
AJM-T	Warm Sand	E12	White cord	5714693286225	5744911298
AJM-T	White	1x10W E12	White cord	5714693680696	5744907273

AJ OXFORD TABLE LAMP

Table lamps

Designer: Arne Jacobsen

Description: This table lamp emits a pleasant downwardly directed light, which harmoniously illuminates the surface below it through the soft transparency of its triple-layered hand-blown opal glass. In the variant without the top metal shade, the milky opal-glass shade provides further glow to form an alluring halo around the fixture.

Finish: Black wet-painted stem with shade in triple-layered hand-blown opal glass.

Top shade: Black wet-painted with white interior.

Material: Shade: hand-blown, triple-layered, white-opal glass.

Stem and top shade: Steel.

Mounting device for pin mounting: Aluminum.

Union nut and finger screw in untreated brass with fine clockwise hairlines.

Please note that the untreated brass will patinate.


Mounting: Cable type: Black fabric cord with plug. Cord length: 7 ft.

Light control: On/off switch on socket house with union nut in untreated brass.

Pin solution available for 16.1 IN: Cut-out dimension 1.7 IN diameter, table thickness: 0.3 - 1.7 in.

Weight: Max. 4 lbs.

Compliance: Ingress protection IP20.

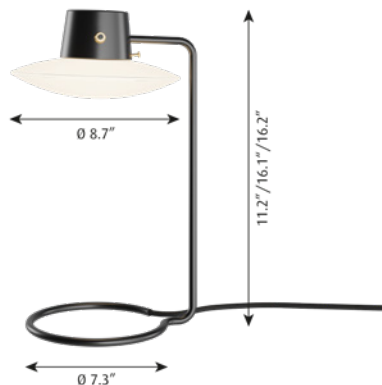

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	SHADE	MOUNTING	EAN	ORDER NO.
AJO-T	280mm	Metal Black/Opal Glass	G16.5/candelabra	W/SHADE	BASE	5714693103324	5744908829
AJO-T	280mm	Opal	G16.5/candelabra	OPAL GLASS	BASE	5714693104246	5744908777
AJO-T	410mm	Metal Black/Opal Glass	G16.5/candelabra	W/SHADE	BASE	5714693105229	5744908722
AJO-T	410mm	Opal	G16.5/candelabra	OPAL GLASS	PIN Ø10	5714693103249	5744908874
AJO-T	410mm	Opal	G16.5/candelabra	OPAL GLASS	BASE	5714693106288	5744908670
SPAREPART							ORDER NO.
AJ EKLIPTA 220 GLASS							5743590005

AJ TABLE

Table lamps

Designer: Arne Jacobsen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish: White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.

Material: Base: Die cast zinc. Shade: Spun steel. Stem: Steel.

Mounting: Cord type: White (White finish), black (non-white finish). Cord length: 10'. Switch: On/off switch on the base.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
AJ-T	Black	1x15W A-19/medium	120V	Black cord	5714693699834	5744905220
AJ-T	Dusty Blue	A-19/medium	120V	Black cord	5714693279036	5744909747
AJ-T	Electric Orange	A-19/medium	120V	White cord	5714693279906	5744909718
AJ-T	Pale Petroleum	1x15W A-19/medium	120V	Black cord	5714693697519	5744905301
AJ-T	Soft Lemon	A-19/medium	120V	White cord	5714693279708	5744909721
AJ-T	Stainless Steel Polished	1x15W A-19/medium	120V	Black cord	5714693253821	5744915061
AJ-T	Warm Grey	A-19/medium	120V	Black cord	5714693278985	5744909750
AJ-T	Warm Sand	A-19/medium	120V	White cord	5714693279197	5744909734
AJ-T	White	1x15W A-19/medium	120V	White cord	5714693699872	5744905217

KEGLEN TABLE

Table lamps

Designer: Big Ideas

Description: The table lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free downwardly directed light. The stem morphs into the diffuser shade, folding inward and creating a beautiful organic geometry. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance.

Finish: Black or white, matte, wet-painted.

Material: Shade: Spun aluminum. Diffuser: Injection molded PC. Base and pin: machined aluminum.

Mounting: Cord type: White or black. Cord length: 10'. Switch: Button on the base. LED driver: Separate, plugs into power outlet. Optional fixed "pin" mount for Ø2.2" hole in desktop.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	CABLE	MOUNTING	EAN	ORDER NO.
KEG-T	Black	LED 2700-2000K D2W 8.5W	383	With cord	PIN Ø40	5714693283590	5744166836
KEG-T	Black	LED 2700-2000K D2W 8.5W	383	With cord	BASE	5714693290260	5744166810
KEG-T	Black	LED 3000K 8.5W	405	With cord	BASE	5703411189023	5744167738
KEG-T	Black	LED 3000K 8.5W	405	With cord	PIN Ø40	5714693236541	5744167712
KEG-T	White	LED 2700-2000K D2W 8.5W	485	With cord	BASE	5714693289424	5744166807
KEG-T	White	LED 2700-2000K D2W 8.5W	485	With cord	PIN Ø40	5714693291106	5744166823
KEG-T	White	LED 3000K 8.5W	513	With cord	PIN Ø40	5703411188996	5744167725
KEG-T	White	LED 3000K 8.5W	513	With cord	BASE	5703411189016	5744167741
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870

NJP MINI

Table lamps

Designer: nendo


Description: The fixture emits a softly diffused, downwardly directed, glare-free light. It fades in at a fixed light level when switched on and fades out when switched off. The timer function can be used to switch it off automatically after either four or eight hours. The fixture provides a broad light distribution for its relatively small size. The shade's white-painted interior helps to comfortably reflect the light. The stepless dimmer allows the light to be adjusted to a suitable level between 15 and 100%. The arm has a stationary angle of 15°, and it can rotate 342° around the base. The head can be tilted and rotated to direct the light.

Finish: White, black, light aluminum gray, rose brown, soft pink, petrol blue, or taupe. Powder-coated.

Material: Base: Steel. Arm and lamp head: Aluminum.

Mounting: Cord type: White (White and soft pink finish), black (other finishes). Cord length: 8'. Switch: High/low/off button on the fixture head. LED driver: Separate, plugs into power outlet. Optional auto shut-off timer function after 4 hours or 8 hours.

Compliance: cULus, Dry location.

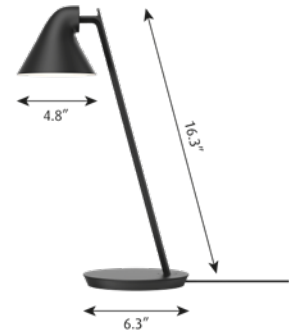

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	CABLE	EAN	ORDER NO.
NJPM-T	Black	LED 2700K 10W	418	Black cord	5714693993772	5744168122
NJPM-T	Brown Rose	LED 2700K 10W	418	Black cord	5714693994236	5744168151
NJPM-T	Light Aluminium Grey	LED 2700K 10W	418	Black cord	5714693994007	5744168148
NJPM-T	Petrol Blue	LED 2700K 10W	418	Black cord	5714693994977	5744168180
NJPM-T	Soft Pink	LED 2700K 10W	418	White cord	5714693994465	5744168164
NJPM-T	Taupe	LED 2700K 10W	418	Black cord	5714693994984	5744168177
NJPM-T	White	LED 2700K 10W	418	White cord	5714693994991	5744168135

NJP TABLE

Table lamps

Designer: nendo

Description: The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.

Finish: White, Black or Light Aluminium Grey, powder coated.

Material: Base: Steel. Arms and lamp head: Aluminum. Joints: Anodized aluminum.

Mounting: Cord type: White (White finish), black (non-white finish). Cord length: 6'. Switch: High/low/off button on the fixture head. Timer function: 4 hours or 8 hours. LED driver: Separate, plugs into power outlet.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
NJP-T	Black	LED 2700K 10W	529	120V	PIN Ø10	5703411133293	10000133060
NJP-T	Black	LED 2700K 10W	529	120V	CLAMP	5703411133323	10000133059
NJP-T	Black	LED 2700K 10W	529	120V	BASE	5703411133354	10000133058
NJP-T	Black	LED 3000K 10W	550	120V	CLAMP	5703411133149	10000133065
NJP-T	Black	LED 3000K 10W	550	120V	PIN Ø10	5703411156025	10000133066
NJP-T	Black	LED 3000K 10W	550	120V	BASE	5703411158838	10000133064
NJP-T	Dark Aluminium Grey	LED 3000K 10W	550	120V	PIN Ø10	5703411131251	10000138377
NJP-T	Dark Aluminium Grey	LED 3000K 10W	550	120V	CLAMP	5703411131282	10000138376
NJP-T	Dark Aluminium Grey	LED 3000K 10W	550	120V	BASE	5703411131312	10000138375
NJP-T	Light Aluminium Grey	LED 2700K 10W	529	120V	PIN Ø10	5703411126783	10000142406
NJP-T	Light Aluminium Grey	LED 2700K 10W	529	120V	CLAMP	5703411126813	10000142405
NJP-T	Light Aluminium Grey	LED 2700K 10W	529	120V	BASE	5703411126844	10000142404
NJP-T	Light Aluminium Grey	LED 3000K 10W	550	120V	PIN Ø10	5703411131343	10000138374
NJP-T	Light Aluminium Grey	LED 3000K 10W	550	120V	CLAMP	5703411131374	10000138373
NJP-T	Light Aluminium Grey	LED 3000K 10W	550	120V	BASE	5703411131404	10000138372
NJP-T	White	LED 2700K 10W	529	120V	PIN Ø10	5703411133200	10000133063
NJP-T	White	LED 2700K 10W	529	120V	CLAMP	5703411133231	10000133062
NJP-T	White	LED 2700K 10W	529	120V	BASE	5703411133262	10000133061
NJP-T	White	LED 3000K 10W	550	120V	PIN Ø10	5703411133026	10000133069
NJP-T	White	LED 3000K 10W	550	120V	CLAMP	5703411133057	10000133068
NJP-T	White	LED 3000K 10W	550	120V	BASE	5703411133088	10000133067
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870
ACCESSORIES							ORDER NO.
NJP TABLE BASE WHT							5744164689
NJP TABLE BASE BLK							5744164692
NJP TABLE CLAMP WHT							5744164702
NJP TABLE CLAMP BLK							5744164715
NJP TABLE PIN Ø10							5744164728
NJP TABLE PIN Ø40							5744165170

PANTHELLA 160 PORTABLE

Table lamps

Designer: Verner Panton

Description: This portable table lamp emits a glare-free, soft, and comfortable light. The metal shade variants reflects the light downwards and provides pleasant illumination created by the inner white painted shade and the reflection from the trumpet-shaped stem. The opal acrylic variants provides gentle illumination and subtle ambience due to the transparency and the reflection of the downward light on the inner side of the shade.

Finish: Opal acrylic shade in White, Pale Rose, and Pale Blue with matching stand.

Grey Opal Acrylic shade with high lustre chrome stand.

Pale Rose, Pale Blue or Coral, powder coated.

Material: Shade: Deep-drawn steel or injection-molded opal acrylic.
Base and housing: Die-cast aluminum.

Mounting: USB-C cable or Qi base for standard USB-C-A adapter.

Light control: Switch on base.

Battery lifetime: 5 hours @ 100%. Step-dim: 0%/10%/33%/100%

Compliance: cULus, Damp location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	CABLE	EAN	ORDER NO.
PAN160-PORT	Black	LED 2700K 2.5W	81	Without cord	5714693253982	5744612571
PAN160-PORT	Coral	LED 2700K 2.5W	81	Without cord	5714693144167	5744612623
PAN160-PORT	Grey Opal Acryl	LED 2700K 2.5W	81	Without cord	5714693985692	5744168070
PAN160-PORT	Orange	LED 2700K 2.5W	81	Without cord	5714693144112	5744612584
PAN160-PORT	Pale Blue	LED 2700K 2.5W	81	Without cord	5714693144150	5744612610
PAN160-PORT	Pale Blue Opal acryl	LED 2700K 2.5W		Without cord	5714693350797	5744170495
PAN160-PORT	Pale Rose	LED 2700K 2.5W	81	Without cord	5714693249527	5744162924
PAN160-PORT	Pale Rose Opal acryl	LED 2700K 2.5W		Without cord	5714693229055	5744612830
PAN160-PORT	White	LED 2700K 2.5W	81	Without cord	5714693144143	5744612607
PAN160-PORT	White Opal Acryl	LED 2700K 2.5W	81	Without cord	5714693262205	5744166768
SPAREPART						ORDER NO.
Panthella 160 Pale Blue shade						5744612665
Panthella 160 Coral shade						5744612678
PANTHELLA 160 PORTE SHADE OPAL PALEROSE						5744613046

PANTHELLA 250 TABLE LAMP

Table lamps

Designer: Verner Panton

Description: The fixture emits a glare-free, soft and comfortable illumination. The metal shade versions direct the light directly downwards and create a pleasant illumination due to the inner white painted shade and the reflection from the trumpet-shaped stem. The opal acrylic produces a diffused comfortable light due to the translucent shade, the downward reflection from the inner shade and the reflection from the trumpet-shaped stem.

Finish: Opal acrylic shade in White, Pale Rose, and Pale Blue with matching stand.

Gray Opal Acrylic shade with high-luster chrome stand.

High-Luster Chrome shade and stand.

Metalized Brass shade and stand.

White, Black, or Orange shade and stand, Powder-coated.

Material: Shade: Injection-molded acrylic or deep-drawn steel.


Base and housing: Cast aluminum.

Diffuser: Injection-molded opal pmma.

Mounting: Cable type: White for brass, pale rose and white finishes; Black for other finishes. Cable length: 8'. LED-driver: Separate, plugs into power outlet. Light control: In-line switch. Auto shut-off timer: 4 hours/8 hours. Continuous dimming from 15% to 100%.

Weight: Max: 3 lbs.

Compliance: cULus, Dry location.

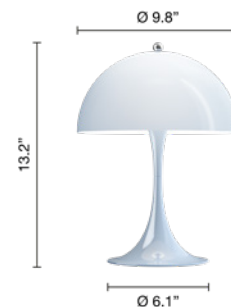

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	CABLE	EAN	ORDER NO.
PAN250-T	Black	LED 2700K 10W	428	120V		5703411750759	5744162432
PAN250-T	Brass Metallised	LED 2700K 10W	428	120V	White cord	5714693510375	5744167110
PAN250-T	Coral	LED 2700K 10W	428	120V	Black cord	5714693150656	5744612652
PAN250-T	Grey Opal Acryl	LED 2700K 10W	679		Black cord	5714693981342	5744168038
PAN250-T	High Lustre Chrome Plated	LED 2700K 10W	428	120V		5703411772584	5744162555
PAN250-T	Orange	LED 2700K 10W	428	120V		5703411750711	5744162474
PAN250-T	Pale Blue	LED 2700K 10W	428	120V	Black cord	5714693150625	5744612649
PAN250-T	Pale Blue Opal acryl	LED 2700K				5714693350803	5744170505
PAN250-T	Pale Rose	LED 2700K 10W	428	120V	White cord	5714693249541	5744162937
PAN250-T	Pale Rose Opal acryl	LED 2700K				5714693231188	5744612872
PAN250-T	White	LED 2700K 10W	460	120V		5703411750674	5744162513
PAN250-T	White Opal Acryl	LED 2700K 10W	589	120V		5703411750728	5744162461
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870
Panthella 250 Opal Grey shade							5744168054
Panthella 250 white cord							5744168436
Panthella 250 Coral shade							5744612717
Panthella 250 Pale Rose shade							5744902087

PANTHELLA 320 TABLE LAMP

Table lamps

Designer: Verner Panton

Description: The fixture emits a soft, comfortable, glare-free, light. The metal-shade versions direct the light directly downward, creating a pleasant illumination due to the inner white-painted shade and the reflection from the trumpet-shaped stem. The opal acrylic produces a diffused, comfortable light due to the translucent shade, the downward reflection from the inner shade, and the reflection from the trumpet-shaped stem.

Finish: White opal acrylic shade with white stand.
Gray opal acrylic shade with high-luster chrome stand.
High-luster chrome shade and stand.
Brass metallized shade and stand.

Material: Shade: Injection-molded acrylic or deep-drawn steel. Base and housing: Cast aluminum.
Diffuser: Injection-molded opal pmma.

Mounting: Cable type: White for white and brass finishes; Black for other finishes. Cable length: 8'. Switch: In-line on/off. Diffuser with bayonet lock.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PAN320-T	Brass Metallised	1x10W G16.5/candelabra	120V	White cord	5714693516117	5744918107
PAN320-T	Grey Opal Acryl	1x7.5W G16.5/candelabra		Black cord	5714693981274	5744908405
PAN320-T	High Lustre Chrome Plated	1x10W G16.5/candelabra	120V	Black cord	5714693514366	5744918055
PAN320-T	White Opal Acryl	1x10W G16.5/candelabra	120V	White cord	5714693512898	5744918000
SPAREPART						ORDER NO.
Panthella 320 Opal Grey shade						5744168041

PANTHELLA 400 TABLE LAMP

Table lamps

Designer: Verner Panton

Description: The fixture emits a glare-free, soft and comfortable illumination. The opal acrylic shade leaves a diffused comfortable light atmosphere due to the translucent shade, the downward reflection from the inner shade and the reflection from the trumpet stem.

Finish: White, opal acrylic.

Material: Base: White, injection molded ABS. Shade: Injection molded white opal acrylic. Housing: White, injection molded ABS.

Mounting: Cord type: White. Cord length: 13'. Switch: In-line on/off switch provided.

Weight: Max: 8 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PAN400-T	White Opal Acryl	A-19/medium	120V	5714693446667	5744916510

PH 2/1 PORTABLE

Table lamps

Designer: Poul Henningsen

Description: This portable table lamp emits a glare-free, soft and comfortable light, that has a dim-to-warm function, giving the perfect illumination for many different activities. The PH 2/1 Portable is designed on the principle of a reflective three-shade system, which creates harmonious and glare-free lighting.

Finish: White opal glass with frame in metallised brass. White opal glass with frame in high lustre chrome plated.

Material: Shades: Mouth-blown white opal glass.
Top plate, base and stem: Brass metallised or High lustre chrome plated brass.

Mounting: Cord length: 1.5 m.
Power: USB-C-C cord for standard 15W/3A USB-C adaptor or inductive charging.
White light indicator on base when charging.
Light control: Switch on base.
Batteries: Lipo, rechargeable, replaceable.
Battery lifetime: 5 hours @ 100%.
Both D2W (1800-3000K) Stepless-dim and 4 step-dim (5%, 20%, 45%, 100%) customer user setting (can switch between the functions).

Weight: Max. 1.25 kg

Compliance: Ingress protection IP44,
Electric shock protection III



PRODUCT CODE	FINISH	SHADE	EAN	ORDER NO.
PH21-PORT	Brass Metallised	OPAL GLASS	5714693331840	5744170424
PH21-PORT	High Lustre Chrome Plated	OPAL GLASS	5714693332038	5744170437
SPAREPART				ORDER NO.
PH 2/1 Portable Rubber Pad				5744170479
PH 2/1 Portable Rep. Kit PCB PAD				5744170482
PH 2/1 Portable Rep. Kit LED				5744171096
PH 2/1 Portable topplate brass metallised				5744171106
PH 2/1 Portable topplate high lustre chrome plated				5744171119
PH 2/1 Portable top nut brass metallised				5744171122
PH 2/1 Portable top nut high lustre chrome plated				5744171135
PH 2/1 Portable shadeholder brass metallised				5744171148
PH 2/1 Portable shadeholder high lustre chrome plated				5744171151
PH 2/1 Portable Battery Rep. Kit				5744620026

PH 2/1 TABLE

Table lamps

Designer: Poul Henningsen

Description: The fixture provides soft lighting. PH 2/1 is designed on the principle of a reflecting multi-shade system, creating harmonious and glare-free lighting. The shade design is based on a logarithmic spiral, with the center of the light source placed in the spiral's focal point.

Finish: Brass metallized, black metallized or high lustre chrome plated. White opal glass.

Material: Shades: Hand-blown white opal glass. Top plate: Brass metallized, black metallized or high lustre chrome plated, machined brass. Base and stem: Brass metallized, black metallized or high lustre chrome plated, brass.

Mounting: Cord type: Black for black and chrome colors; white for brass. Cord length: 10'. Switch: On/off switch on cord.

Weight: Max. 4 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH21-T	Black Metallised	1x4W T-4 G9	120V	Black cord	5714693534777	5744907121
PH21-T	Brass Metallised	1x4W T-4 G9	120V	White cord	5714693534692	5744907105
PH21-T	High Lustre Chrome Plated	1x4W T-4 G9	120V	Black cord	5714693534739	5744907118

PH 3/2 GLASS TABLE

Table lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and diffused light distribution.

Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Base: Black metalized or high lustre chrome plated, brass. Shades: Hand blown white opal glass. Top plate: Black metalized or high lustre chrome plated, spun brass. Stem: Black metalized or high lustre chrome plated, brass.

Mounting: Cord type: Black. Cord length: 10'. Switch: In-line on/off switch provided.

Weight: Max: 7 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH32-T	Black Metallised	1x10W G16.5/candelabra	120V	Black cord	5703411184141	5744901512
PH32-T	Brass Metallised	1x10W G16.5/candelabra	120V	White cord	5703411096703	5744901826
PH32-T	High Lustre Chrome Plated	1x10W G16.5/candelabra	120V	Black cord	5703411091036	5744901350

PH 3½-2½ GLASS TABLE

Table lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and diffused light distribution.

Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Shades: Hand blown white opal glass. Top plate: Black metalized or high lustre chrome plated, spun brass. Base and stem: Black metalized or high lustre chrome plated, brass.

Mounting: Cord type: Black. Cord length: 12'. Switch: In-line on/off switch provided.

Weight: Max: 15 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH3½2½G-T	Black Metallised	1x10W G16.5/candelabra	120V	Black cord	5703411567500	5744903853
PH3½2½G-T	Brass Metallised	1x10W G16.5/candelabra	120V	White cord	5703411102978	5744901868
PH3½2½G-T	High Lustre Chrome Plated	1x10W G16.5/candelabra	120V	Black cord	5703411567661	5744903837

PH 3½-2½ TABLE

Table lamps

Designer: Poul Henningsen

Description: The louvre is 100% glare-free, with a design based on the principle of a reflective three-shade system, which directs most of the light downwards. For some variants, the top shade is made of deep drawn aluminum with white inner surface that ensures gentle, downward light distribution. The two bottom handblown opal glass shades ensure a large glare-free light surface, making optimum use of the light source to provide comfortable, functional lighting.

Finish: Red, green, yellow and white, powder coated. Base: silk matte brown, copper.

Material: Shades: deep drawn aluminum. Base: silk matte brown, copper.

Mounting: Cord type: Black. Cord length: 12'. Switch: In-line on/off switch provided.

Weight: Max: 8 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH3½2½-T	Green	1x10W G16.5/IF candelabra US	120V	5703411460481	5744902731
PH3½2½-T	Red	1x10W G16.5/IF candelabra US	120V	5703411460399	5744902702
PH3½2½-T	White	1x10W G16.5/IF candelabra US	120V	5703411460429	5744902715
PH3½2½-T	Yellow	1x10W G16.5/IF candelabra US	120V	5703411460450	5744902728

PH 4/3 TABLE

Table lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure a diffused, comfortable light distribution.

Finish: White, powder coated. High lustre chrome plated.

Material: Base: High lustre chrome plated, spun brass. Shades: Spun aluminum. Stem: High lustre chrome plated, steel. Triangular piece: Black, injection molded bakelite.

Mounting: Cord type: Black. Cord length: 8'. Switch: In-line on/off switch provided.

Weight: Max: 7 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	MOUNTING	EAN	ORDER NO.
PH43-T	White	1x15W A-19/medium	120V	FREE STANDING	5703411285664	5744904522
SPAREPART						ORDER NO.
PH 4-3 TABLE, LAMPHOLDER ASS.						5744610696
PH 4-3 TABLE, LAMPHOLDER BRACKET						5744610706
PH 4-3 TABLE MIDDLE/LOWER SHADESET NEW						5744610829

PH 4½-3½ GLASS TABLE

Table lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and diffused light distribution.

Finish: High lustre chrome plated. White opal glass.

Material: Base: High lustre chrome plated, spun brass. Shades: Hand blown white opal glass. Anti-glare ring: Purple, spun aluminum. Top plate: High lustre chrome plated, spun brass. Stem: High lustre chrome plated, steel.

Mounting: Cord type: Black. Cord length: 9'. Switch: On/off switch on the base.

Weight: Max: 22 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH4½3½-T	High Lustre Chrome Plated	1x15W A-19/IF medium US	120V	5703411157985	5844901253

VL38 TABLE

Table lamps

Designer: Vilhelm Lauritzen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish: Brushed brass. Black or white, powder coated.

Material: Base: Die cast aluminum Shade: Spun aluminum. Stem: Brushed brass.

Mounting: Cord type: White or black. Cord length: 10'. Switch: High/low/off switch on the base. LED driver: Separate, plugs into power outlet.

Weight: Max: 5 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	EAN	ORDER NO.
VL38-T	Black	LED 2700K 9.6W	416	120V	5703411630532	5744163211
VL38-T	White	LED 2700K 9.6W	416	120V	5703411682562	5744162322
SPAREPART						ORDER NO.
Adaptor 12V black						5744164867
Adaptor 12V white						5744164870
VL38 REPLACEMENT KIT LED W/WIRE						5744165963

YUH TABLE

Table lamps

Designer: GamFratesi

Description: The fixture primarily provides glare-free downward directed light. The angle of the shade can be adjusted to optimize light distribution. A slim opening in the top of the shade provides soft, ambient upward illumination. A mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace, living room etc. Built-in LED technology provides a high quality of light with stepless dimming from 100% to 15%. Optional timer capability automatically turns off the light after a chosen duration of 4 or 8 hours. Returns to the last dim level setting when switched on. A button at the top of the tube acts as switch and dimmer.

Finish: White or black: Matte wet painted.
Brass/Marble versions: White or black shade matte wet painted. . Brushed brass stem, clear lacquered. Matte marble base.

Material: Shade: Die cast aluminum. Base: Die cast aluminum (wet painted) or brushed marble. Marble: Italian Nero Margiua or White Carrara. Stem: Extruded brass (wet painted or clear lacquered).

Mounting: Cord type: White or black. Cord length: 10'. Switch: High/low/off switch on the base. LED driver: Separate, plugs into power outlet.

Weight: Max: 5 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
YUH-T	Black	LED 2700K 10W	446	120V	BLACK BASE	5703411664964	5744612555
YUH-T	Brass/Black	LED 2700K 10W	446	120V	BLACK MARBLE BASE	5714693254101	5744162652
YUH-T	Brass/White	LED 2700K 10W	446	120V	WHITE MARBLE BASE	5714693077175	5744162665
YUH-T	White	LED 2700K 10W	446	120V	WHITE BASE	5703411665008	5744612568
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870

AJ EKLIPTA WALL

Wall lamps

Designer: Arne Jacobsen

Description: The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer hand blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture.


Finish: White, powder coated. White opal glass.

Material: Ceiling/Wall box: Spun aluminum. Diffuser: Hand blown white opal glass.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box (13.7"/17.7") or 3" octagonal junction box (8.7").

Weight: Max: 11 lbs.

Compliance: cULus, Wet location.

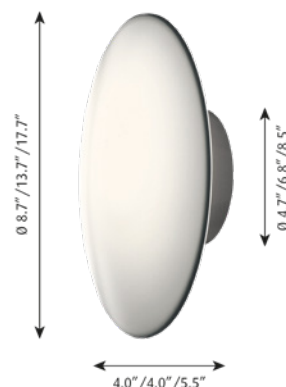

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	SHIELD/DIFFUSER	MOUNTING	MOUNTING SPECS.	EAN	ORDER NO.
AJE-WC	13.7 IN	White	1x60W A-19/IF Medium US			120V		WALL AND SURFACE		5703411153338	5842905400
AJE-WC	13.7 IN	White	LED 3000K 10W	DIM 0-10V	705	120-277V/60HZ		WALL AND SURFACE		5703411143193	1000012110
AJE-WC	17.7 IN	White	1x100W A-19/IF medium US			120V		WALL AND SURFACE		5703411153307	5842905426
AJE-WC	17.7 IN	White	LED 3000K 25W	DIM 0-10V	1628	120-277V/60HZ		WALL AND SURFACE		5703411143131	1000012111
AJE-WC	8.7 IN	White	1x40W G9			120V	WHITE OPAL	WALL AND CEILING		5703411115534	5743908011
AJE-WC	8.7 IN	White	LED 3000K 10W		371		WHITE OPAL	WALL AND CEILING	BOX W/O/SIDE CABLE HOLES	5703411840573	5743911192
SPAREPART											ORDER NO.
AJ EKLIPTA 220 GLASS											5743590005

AJ WALL

Wall lamps

Designer: Arne Jacobsen

Description: The wall lamp emits downward directed light. The angle of the shade and rotation can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.

Finish: White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.


Material: Shade: Spun steel or stainless steel. Wall box: Spun steel or deep drawn stainless steel. Arm: Steel or stainless steel.

Mounting: Mounted directly to finished surface over a 4" octagonal junction-box. On/off switch on the wall plate, white for white finish, black for non-white finishes.

Variants without on/off switch to be remotely controlled.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.

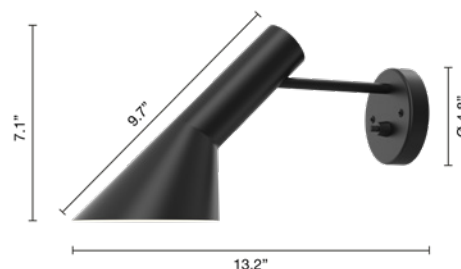

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	SHADE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
AJ-W	Black	1x10W G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693719013	5743907287
AJ-W	Black	1x10W G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693770571	5743915101
AJ-W	Dusty Blue	G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693269365	5743917918
AJ-W	Dusty Blue	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693269464	5743917963
AJ-W	Electric Orange	G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693269273	5743917882
AJ-W	Electric Orange	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693269402	5743917934
AJ-W	Pale Petroleum	1x10W G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693716692	5743907368
AJ-W	Pale Petroleum	1x10W G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693765454	5743915185
AJ-W	Soft Lemon	G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693269327	5743917895
AJ-W	Soft Lemon	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693269426	5743917947
AJ-W	Stainless Steel Polished	1x10W G16.5/candelabra	120V		With switch	Without cord	5714693254170	5743914348
AJ-W	Stainless Steel Polished	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693765614	5743915224
AJ-W	Warm Grey	G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693269389	5743917921
AJ-W	Warm Grey	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693269488	5743917976
AJ-W	Warm Sand	G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693269341	5743917905
AJ-W	Warm Sand	G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693269440	5743917950
AJ-W	White	1x10W G16.5/candelabra	120V	TILTABLE	With switch	Without cord	5714693719051	5743907274
AJ-W	White	1x10W G16.5/candelabra	120V	TILTABLE	Without switch	Without cord	5714693770533	5743915091

KEGLEN WALL

Wall lamps

Designer: Big Ideas


Description: The wall lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free light. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance. The fixture can be mounted facing downward to direct the light to a specific spot, or upward for indirect light.

Finish: Black or white, matte, wet-painted.

Material: Shade: Spun aluminum. Diffuser: Injection molded PC.

Mounting: Mounted directly to finished surface over a 4" octagonal junction-box.
Switch: push button switch on the top wall box. Electronic LED driver is housed inside the wall box.

Compliance: cULus, Dry location.

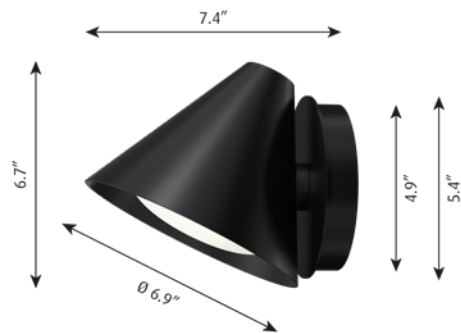

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	SWITCH/PLUG	CABLE	EAN	ORDER NO.
KEG-W	Black	LED 2700-2000K D2W 8.5W	338	With dimmer	With cord	5714693271498	5743914377
KEG-W	Black	LED 3000K 8.5W	358		With cord	5714693025633	5743916207
KEG-W	White	LED 2700-2000K D2W 8.5W	457	With dimmer	With cord	5714693271313	5743914364
KEG-W	White	LED 3000K 8.5W	484		With cord	5714693025596	5743916252

LP GRAND WALL

Wall lamps

Designer: Christian Flindt

Description: The circular luminaire emits a combination of softly diffused, glare-free, downwardly directed light and reflected indirect light from its curved upper rings. A large angled reflector encircles the diffuser and reduces the contrast around the edge. The top reflector is perfectly curved to distribute uplight at a broad angle. A colored outer shade surrounds the reflector and creates an interreflection of light, resulting in a graceful glow on the outside of the top and bottom reflectors. In total, it creates four rings of light surrounding the central diffuser.

Finish: Reflector: Matte-white satin finish.
Outer shade (outside): Matte (black and champagne) or gloss (white). Wet-painted surface. Diffuser: Glossy.

Material: Ø320:
Top reflector: ABS.
Bottom reflector: ABS.
Outer shade: ABS.
Diffuser: PMMA.
Housing: Die-cast Aluminum.

Ø580:
Top reflector: ABS.
Bottom reflector: PE.
Housing: ABS.
Outer shade: ABS.
Diffuser: PMMA.

Mounting: Ø320/Ø580:
Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max: 70 lbs.

Compliance: cULus, Damp location.



PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHT TECHNIQUE	LIGHTING CONTROL	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
LP-GRAND-WALL	12.6 IN	Black	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693049141	5741939260
LP-GRAND-WALL	12.6 IN	Black	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693030774	5741939325
LP-GRAND-WALL	12.6 IN	Black	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030088	5741939383
LP-GRAND-WALL	12.6 IN	Champagne	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693027026	5741939257
LP-GRAND-WALL	12.6 IN	Champagne	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693049455	5741939312
LP-GRAND-WALL	12.6 IN	Champagne	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030316	5741939370
LP-GRAND-WALL	12.6 IN	White	LED 2700K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1052	120-277V/60HZ	WALL & SURFACE	5714693027255	5741939244
LP-GRAND-WALL	12.6 IN	White	LED 3000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1151	120-277V/60HZ	WALL & SURFACE	5714693031009	5741939309
LP-GRAND-WALL	12.6 IN	White	LED 4000K 12W	W/UPLIGHT	PHASE+DIM 0-10V	1166	120-277V/60HZ	WALL & SURFACE	5714693030545	5741939367

LP SLIM ROUND WALL

Wall lamps


Designer: Louis Poulsen A/S

Description: The slim housing encircles a high-efficient acrylic diffuser emitting diffused primarily downward directed light. The slim body has a slight curvature and an inner curve which reduces contrast. The product family comes in a range of sizes and mounting options for a wide range of applications. Surface mounted and suspended versions have an indirect light component.

Finish: White, aluminium grey or black, powder coated.

Material: Reflector: Die cast aluminum. Diffuser: Acrylic, opal or micro prismatic. Installation lock: Aluminum.

Mounting: Directly on wall. Looping: Approved, max 5x1.5mm². Cable entries: Rear, Side-mounted.

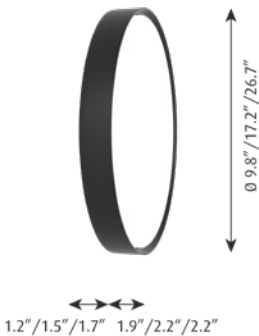

Compliance: Ingress protection IP20. Electric shock protection I.

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	VOLTAGE	SHIELD/DIFFUSER	EAN	ORDER NO.
LPSLMR-W	17.2 IN	Black	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869312	10000153874
LPSLMR-W	17.2 IN	Black	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693867479	10000154074
LPSLMR-W	17.2 IN	Black	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865345	10000140930
LPSLMR-W	17.2 IN	Black	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867592	10000154062
LPSLMR-W	17.2 IN	Black	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865314	10000140933
LPSLMR-W	17.2 IN	Black	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867554	10000154066
LPSLMR-W	17.2 IN	Dark Aluminium Raw	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869329	10000153873
LPSLMR-W	17.2 IN	Dark Aluminium Raw	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693867462	10000154075
LPSLMR-W	17.2 IN	Dark Aluminium Raw	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864607	10000151317
LPSLMR-W	17.2 IN	Dark Aluminium Raw	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867585	10000154063
LPSLMR-W	17.2 IN	Dark Aluminium Raw	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864591	10000151318
LPSLMR-W	17.2 IN	Dark Aluminium Raw	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867547	10000154067
LPSLMR-W	17.2 IN	White	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869572	10000153001
LPSLMR-W	17.2 IN	White	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693867448	10000154077
LPSLMR-W	17.2 IN	White	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865338	10000140931
LPSLMR-W	17.2 IN	White	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867561	10000154065
LPSLMR-W	17.2 IN	White	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865307	10000140934
LPSLMR-W	17.2 IN	White	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867523	10000154069
LPSLMR-W	26.7 IN	Black	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865284	10000140936
LPSLMR-W	26.7 IN	Black	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865253	10000140939
LPSLMR-W	26.7 IN	Dark Aluminium Raw	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864584	10000151319
LPSLMR-W	26.7 IN	Dark Aluminium Raw	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864577	10000151320
LPSLMR-W	26.7 IN	White	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865277	10000140937
LPSLMR-W	26.7 IN	White	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865246	10000140940
LPSLMR-W	9.8 IN	Black	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869343	10000153871
LPSLMR-W	9.8 IN	Black	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693868124	10000154009
LPSLMR-W	9.8 IN	Black	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865406	10000140924
LPSLMR-W	9.8 IN	Black	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867431	10000154078
LPSLMR-W	9.8 IN	Black	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865376	10000140927
LPSLMR-W	9.8 IN	Black	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867394	10000154082
LPSLMR-W	9.8 IN	Dark Aluminium Raw	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869350	10000153870
LPSLMR-W	9.8 IN	Dark Aluminium Raw	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693868117	10000154010
LPSLMR-W	9.8 IN	Dark Aluminium Raw	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864560	10000151321
LPSLMR-W	9.8 IN	Dark Aluminium Raw	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867424	10000154079
LPSLMR-W	9.8 IN	Dark Aluminium Raw	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693864553	10000151322
LPSLMR-W	9.8 IN	Dark Aluminium Raw	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867387	10000154083
LPSLMR-W	9.8 IN	White	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	OPAL	5714693869589	10000153000
LPSLMR-W	9.8 IN	White	KELVIN ADJUSTABLE	DALI KELVIN ADJUSTABLE	120-277V/60HZ	PRISMATIC	5714693868094	10000154012
LPSLMR-W	9.8 IN	White	LED 3000K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865390	10000140925
LPSLMR-W	9.8 IN	White	LED 3000K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867400	10000154081
LPSLMR-W	9.8 IN	White	LED 3500K	DIM 0-10V	120-277V/60HZ	OPAL	5714693865369	10000140928
LPSLMR-W	9.8 IN	White	LED 3500K	DIM 0-10V	120-277V/60HZ	PRISMATIC	5714693867363	10000154085

NJP WALL

Wall lamps

Designer: nendo

Description: The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.

Finish: White, Black or Light Aluminium Grey, powder coated.

Material: Arms and lamp head: Aluminum. Joints: Anodized Aluminum. Wall bracket: Aluminum.

Mounting: Cord type: White (White finish), black (non-white finish). Cord length: 6'. Switch: High/low/off button on the fixture head. Timer function: 4 hours or 8 hours. LED driver: Separate, plugs into power outlet.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	CABLE	MOUNTING	EAN	ORDER NO.
NJP-W	Black	LED 2700K 10W	529	120V		LONG ARM	5703411132661	10000135259
NJP-W	Black	LED 2700K 10W	529	120V		SHORT ARM	5703411479537	5743163186
NJP-W	Black	LED 2700K 10W	529		With cord and wall box	LONG ARM	5714693087006	5743916715
NJP-W	Black	LED 2700K 10W	529		With cord and wall box	SHORT ARM	5714693092475	5743916799
NJP-W	Black	LED 3000K 10W	550	120V		LONG ARM	5703411132609	10000135262
NJP-W	Black	LED 3000K 10W	550	120V		SHORT ARM	5703411479513	5743163209
NJP-W	Black	LED 3000K 10W	550		With cord and wall box	SHORT ARM	5714693085972	5743916757
NJP-W	Black	LED 3000K 10W	550		With cord and wall box	LONG ARM	5714693087846	5743916676
NJP-W	Light Aluminium Grey	LED 2700K 10W	529	120V		LONG ARM	5703411126721	10000142408
NJP-W	Light Aluminium Grey	LED 2700K 10W	529	120V		SHORT ARM	5703411746547	5743163995
NJP-W	Light Aluminium Grey	LED 2700K 10W	529		With cord and wall box	LONG ARM	5714693086986	5743916731
NJP-W	Light Aluminium Grey	LED 2700K 10W	529		With cord and wall box	SHORT ARM	5714693092321	5743916812
NJP-W	Light Aluminium Grey	LED 3000K 10W	550	120V		LONG ARM	5703411131220	10000138378
NJP-W	Light Aluminium Grey	LED 3000K 10W	550		With cord and wall box	SHORT ARM	5714693085620	5743916773
NJP-W	Light Aluminium Grey	LED 3000K 10W	550		With cord and wall box	LONG ARM	5714693087822	5743916692
NJP-W	Light Aluminium Grey	LED 3000K 10W	550	120V		SHORT ARM	5714693255764	5743163348
NJP-W	White	LED 2700K 10W	529	120V		LONG ARM	5703411132630	10000135261
NJP-W	White	LED 2700K 10W	529	120V		SHORT ARM	5703411479520	5743163199
NJP-W	White	LED 2700K 10W	529		With cord and wall box	LONG ARM	5714693086993	5743916728
NJP-W	White	LED 2700K 10W	529		With cord and wall box	SHORT ARM	5714693092376	5743916809
NJP-W	White	LED 3000K 10W	550	120V		SHORT ARM	5703411479506	5743163212
NJP-W	White	LED 3000K 10W	550		With cord and wall box	SHORT ARM	5714693085873	5743916760
NJP-W	White	LED 3000K 10W	550		With cord and wall box	LONG ARM	5714693087839	5743916689
NJP-W	White	LED 3000K 10W	550	120V		LONG ARM	5703411132579	10000135263
SPAREPART								ORDER NO.
Adaptor 12V black								5744164867
Adaptor 12V white								5744164870

PH 2/1 WALL

Wall lamps

Designer: Poul Henningsen


Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of mouth-blown opal three-layer glass, which is shiny on the top and sandblasted matte on the inside, giving a soft and diffuse light distribution.

Finish: White opal glass. High lustre chrome plated.

Material: Shades: Handblown white opal glass. Wall box: High lustre chrome plated, spun brass. Suspension: High lustre chrome plated, spun aluminum. Arm: High lustre chrome plated, brass.

Mounting: Surface: Mounted directly to finished surface over a 4" octagonal junction-box. Switch: On/off switch on the wall plate.

Compliance: cULus, Dry location.

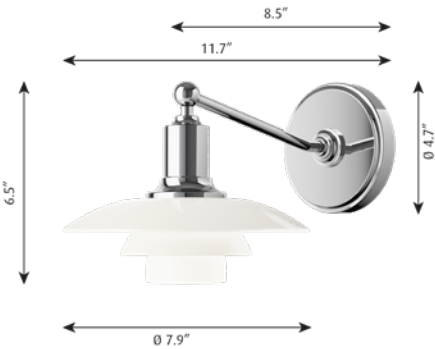

PRODUCT CODE	FINISH	LIGHT SOURCE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
PH21-W	White Opal Glass	1x10W E12	With switch	Without cord	5714693970070	5743912696

PH 3/2 WALL

Wall lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of mouth-blown opal three-layer glass, which is shiny on the top and sandblasted matte on the inside, giving a soft and diffuse light distribution.

Finish: White opal glass. High lustre chrome plated.

Material: Shades: Handblown white opal glass. Wall box: High lustre chrome plated, spun brass. Suspension: High lustre chrome plated, spun aluminum. Arm: High lustre chrome plated, brass.

Mounting: Surface: Mounted directly to finished surface over a 4" octagonal junction-box. Switch: On/off switch on the wall plate.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
PH32-W	White Opal Glass	1x10W E12	With switch	Without cord	5714693952175	5743909230

PH HAT

Wall lamps

Designer: Poul Henningsen


Description: The fixture emits indirect 100% glare-free light. The light distribution depends on the angle of the shade. The shade is rose colored on the inside, giving the light a warm tone.

Finish: The outer shade is white, wet-painted. The inner shade is rose-colored, wet-painted.

Material: Shade: Spun steel. Wall box: Spun steel.

Mounting: Surface: Mounted directly to a 4" octagonal junction-box.

Compliance: cULus, Dry location.

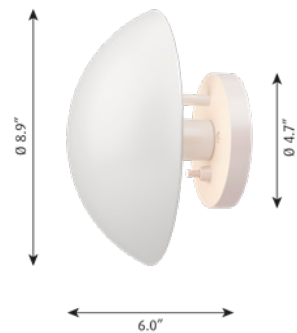

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
PHH-W	8.9 IN	White	1x10W E12	With switch	Without cord	5714693658961	5743914940

VL RING CROWN WALL

Wall lamps

Designer: Vilhelm Lauritzen


Description: The wall lamp emits light directed primarily downwards. The opal glass provides a comfortable and uniform illumination of the area around the fixture.

Finish: Glossy, hand blown white opal glass. Satin polished brass, untreated.

Material: Hand blown, 3-layered, opal glass. Wall lamp arm and wall-box: Untreated brass, will patinate.

Mounting: Mounting with cord and plug or for hardwiring.
With cord: White 2 x 0,75 mm² PVC cord with plug. Cord length: 2.5m. Light control: On/off switch on wall box.
Without cord for hardwiring: Wall bracket for mounting on wall. Light control: Two options. Either with on/off switch on wall box or without switch on wall box with turn on/off at main switch

Compliance: Ingress protection IP20.
With cord and plug: Electric shock protection II.
For hardwiring: Electric shock protection I.

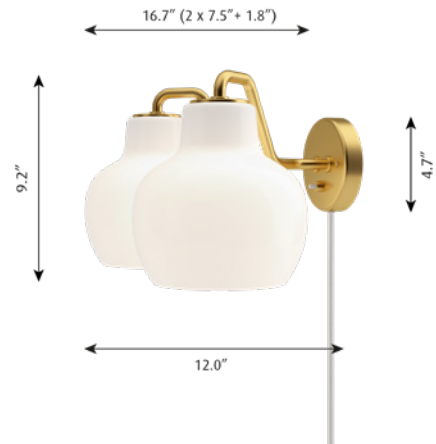

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
VLRC-W	1	Brass/Glossy Opal Glass	1x40W A-19/medium	120V	With switch	With cord	5703411179192	5743913611
VLRC-W	2	Brass/Glossy Opal Glass	2x40W A-19/medium	120V	With switch	With cord	5703411178782	5743913637
SPAREPART								ORDER NO.
VL RING CROWN WALL/3-5-7 GLASS								5741094406
VL Ring Crown wire/cord, replacement kit								5741940741

VL STUDIO WALL

Wall lamps

Designer: Vilhelm Lauritzen

Description: The fixture emits a glare-free, diffused light. The triple-layered opal glass provides pleasant and uniform illumination of the area around the fixture. The lampshade can be tilted 90 degrees to the right or left, which allows for flexible light distribution.

Finish: matte black, wet painted or brushed brass with fine hairlines. White opal glass, glossy. Clear lacquered brass.

Material: Glass: Hand-blown, triple-layered opal, glossy.


Housing: Deep-drawn aluminum or brass.

Wall box: Die-cast aluminum or forged brass. Please note that the untreated brass will patinate.

Mounting: Surface: Mounted directly to finished surface over a 4" octagonal junction-box. Glass can be unscrewed to change the light source. No switch is on the luminaire; remote switch is required.

Weight: Max. 1,3 kg.

Compliance: cULus, Dry location.

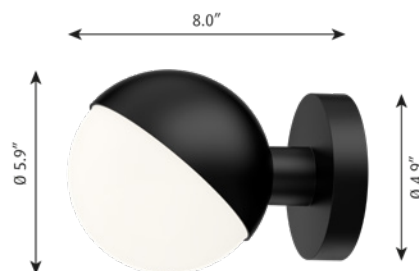

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
VLST-W	5.9 IN	Black	1x5W G9	120V	Without switch	Without cord	5714693434435	5743914652
VLST-W	5.9 IN	Lacquered Brass	1x5W G9	120V	Without switch	Without cord	5714693434190	5743914704
SPAREPART								ORDER NO.
VL STUDIO 150 TABLE/WALL GLASS								5743151868
VL STUDIO 150 WALL PINOL SCREW BLACK								5743151871
VL STUDIO TABLE/WALL GROMMET WHITE								5744167877
VL STUDIO TABLE/WALL GROMMET BLACK								5744167880

VL38 WALL

Wall lamps

Designer: Vilhelm Lauritzen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.


Finish: Brushed brass. Black or White, powder coated.

Material: Wall box: Punched aluminum. Shade: Spun aluminum. Arm: Brushed brass.

Mounting: Surface: Mounted directly to finished surface over a 4" octagonal junction-box.

Weight: Max: 2 lbs.

Compliance: cULus, Dry location.

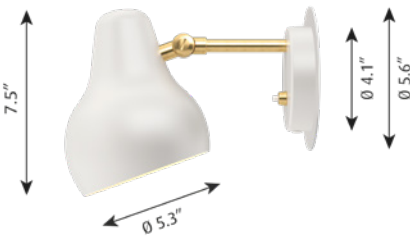

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	SHADE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
VL38-W	Black	LED 2700K 9.6W	416	120V	TILTABLE	With switch	Without cord	5703411683514	5743903964
VL38-W	White	LED 2700K 9.6W	416	120V	TILTABLE	With switch	Without cord	5703411682609	5743904730
SPAREPART									ORDER NO.
VL38 REPLACEMENT KIT LED W/WIRE									5744165963

YUH WALL

Wall lamps

Designer: GamFratesi

Description: The fixture primarily provides glare-free downward directed light. The angle of the shade can be adjusted to optimize light distribution. A slim opening in the top of the shade provides soft, ambient upward illumination. A mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace, living room etc. Built-in LED technology provides a high quality of light with stepless dimming from 100% to 15%. Optional timer capability automatically turns off the light after a chosen duration of 4 or 8 hours. Returns to the last dim level setting when switched on. The switch and dimmer button is placed on the wall box.

Finish: White or black. Matte wet painted. Brass versions: White or black shade. Matte wet painted. Clear lacquered, brushed brass stem and wall box.

Material: Shade: Die cast aluminum. Stem: Extruded brass (wet painted or clear lacquered). Wall box: Die cast aluminum (wet painted) or extruded brass (clear lacquered).

Mounting: Shade: Spun steel. Base: Spun aluminum. Arm: Steel.

Weight: Max: 3 lbs.

Compliance: cULus, Dry location.



PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	EAN	ORDER NO.
YUH-W	Black	LED 2700K 10W	446	120V	5703411664285	5743905315
YUH-W	Brass/Black	LED 2700K 10W	446	120V	5714693072668	5743913789
YUH-W	Brass/White	LED 2700K 10W	446	120V	5714693072620	5743913792
YUH-W	White	LED 2700K 10W	446	120V	5703411664445	5743905328

AJ FLOOR

Floor lamps

Designer: Arne Jacobsen

Description: The floor lamp emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.


Finish: White, Black, Pale Petroleum, Warm Sand, Soft Lemon, Electric Orange, Dusty Blue, Warm Grey, Stainless Steel Polished.

Material: Base: Die cast zinc. Shade: Spun steel. Stem: Steel.

Mounting: Cord type: White (White finish), black (non-white finish). Cord length: 9'. Switch: In-line on/off foot switch provided.

Weight: Max: 8 lbs.

Compliance: cULus, Dry location.

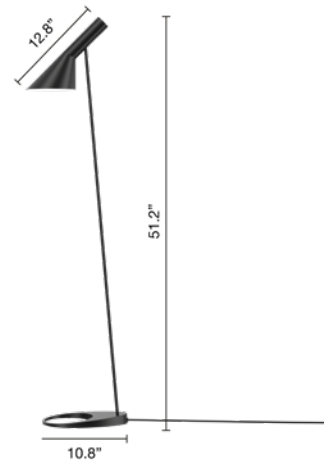

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
AJ-F	Black	1x15W E26		Black cord	5714693738199	5744905929
AJ-F	Dusty Blue	E26		Black cord	5714693273355	5744909491
AJ-F	Electric Orange	E26		White cord	5714693274000	5744909462
AJ-F	Pale Petroleum	1x15W E26		Black cord	5714693735877	5744906009
AJ-F	Soft Lemon	E26		White cord	5714693273546	5744909475
AJ-F	Stainless Steel Polished	1x15W A-19/medium	120V	Black cord	5714693253784	5744915113
AJ-F	Warm Grey	E26		Black cord	5714693273157	5744909501
AJ-F	Warm Sand	E26		White cord	5714693273447	5744909488
AJ-F	White	1x15W E26		White cord	5714693738236	5744905916
SPAREPART						ORDER NO.
FOOT SWITCH, ON/OFF, BLACK						5717000000

KEGLEN FLOOR

Floor lamps

Designer: Big Ideas


Description: The floor lamp's distinctive conical shade has a built-in curved diffuser. This ensures an attractive and glare-free downwardly directed light. The stem morphs into the diffuser shade, folding inward and creating a beautiful organic geometry. A gentle light is also emitted upward through a discreet uniform opening in the top of the shade to create a perfect ambiance.

Finish: Black or white, matte, wet-painted.

Material: Shade: Spun aluminum. Diffuser: Injection-molded PC. Base: Die cast aluminum. Stem: Machined aluminum.

Mounting: Cord type: White or black. Cord length: 10'. Switch: Button on the base. LED driver: Separate, plugs into power outlet.

Compliance: cULus, Dry location.

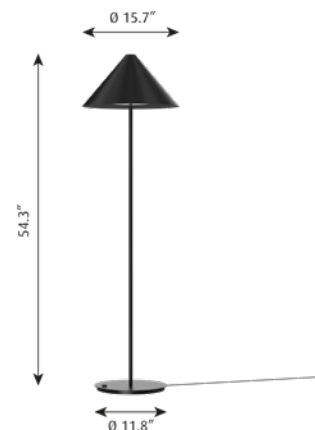

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	SWITCH/PLUG	CABLE	EAN	ORDER NO.
KEG-F	Black	LED 2700-2000K D2W 8.5W	481	With switch	With cord	5714693288588	5744166797
KEG-F	Black	LED 3000K 8.5W	509	With switch	With cord	5714693988273	5744167945
KEG-F	White	LED 2700-2000K D2W 8.5W	541	With switch	With cord	5714693287741	5744166784
KEG-F	White	LED 3000K 8.5W	573	With switch	With cord	5714693988297	5744167958
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870

MOONSETTER

Floor lamps

Designer: Anne Boysen

Description: The sculptural floor lamp in chrome-plated aluminum has a rotating disc that allows customization of the reflection of the glare-free light emitted by the LED light source elegantly submerged in the frame. The disc rotates 360° around its own axis and is white on one side and reflective on the other. Tilted towards the white side, the light becomes soft and diffuse, whereas the opposite chrome side reflects the light panel directly for a completely different expression. The light is directed according to the position of the disc. The surroundings are mirrored in the frame and the chrome side of the disc. The lamp offers stepless dimming and is turned on and off by the rotating footswitch on the cylinder.


Finish: High lustre chrome-plated.

Disc: High lustre chrome-plated on one side and white, wet painted on the opposite side.

Material: Frame: High lustre chrome-plated solid cast aluminum.
Cylinder and switch: High lustre chrome-plated extruded aluminum.
Disc: Solid cast aluminum. High lustre chrome-plated on one side and white on the opposite side.
Opal silicone diffuser.

Mounting: Cable type: Black PVC. Cable length: 8'.
LED-driver: Separate, plugs into power outlet.
Light control: dial on cylinder of frame.
Continuous dimming to off.

Compliance: cULus, Dry location.

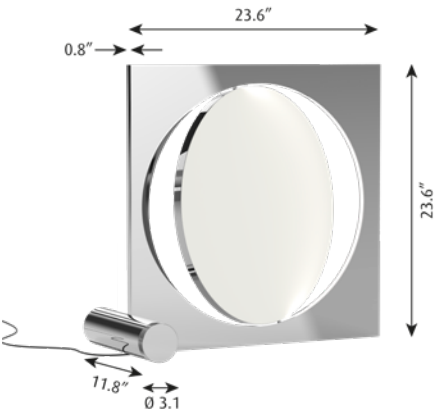

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	SWITCH/PLUG	EAN	ORDER NO.
M00-F	600x600	High Lustre Chrome/White	LED 3500K 16W	With dimmer	5714693109036	5744908887

NJP FLOOR

Floor lamps

Designer: nendo

Description: The fixture provides direct glare-free horizontal light while reflecting some of the light through the rear of the head, illuminating the top of the arm. The ergonomic design of the fixture head shapes the light and gives optimal light direction. A simple mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace. The shade is painted white on the inside, reflecting comfortable diffused light.


Finish: White, Black or Light Aluminium Grey, powder coated.

Material: Base: Steel. Arms and lamp head: Aluminum. Joints: Anodized Aluminum. Stem: Aluminum.

Mounting: Cord type: White (White finish), black (non-white finish). Cord length: 6'. Switch: High/low/off button on the fixture head. Timer function: 4 hours or 8 hours. LED driver: Separate, plugs into power outlet.

Weight: Max: 6 lbs.

Compliance: cULus, Dry location.

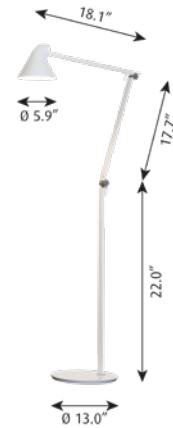

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	EAN	ORDER NO.
NJP-F	Black	LED 2700K 10W	529	120V	5703411132548	10000135264
NJP-F	Black	LED 3000K 10W	550	120V	5703411160237	10000135267
NJP-F	Light Aluminium Grey	LED 2700K 10W	529	120V	5703411126752	10000142407
NJP-F	Light Aluminium Grey	LED 3000K 10W	550	120V	5703411131169	10000138380
NJP-F	White	LED 2700K 10W	529	120V	5703411132517	10000135266
NJP-F	White	LED 3000K 10W	550	120V	5703411132456	10000135268
SPAREPART						ORDER NO.
Adaptor 12V black						5744164867
Adaptor 12V white						5744164870

PANTHELLA FLOOR

Floor lamps

Designer: Verner Panton

Description: The fixture emits a soft and comfortable illumination. The hemispherical shade reflects the light downwards, and the material used ensures that the majority of the light is spread diffusely in the room from the surface of the shade.


Finish: White, opal acrylic.

Material: Base: White, injection molded ABS. Shade: Injection molded white opal acrylic. Housing: White, injection molded ABS. Stem: White, steel.

Mounting: Cord type: White. Cord length: 11'. Switch: In-line on/off foot switch provided.

Weight: Max: 13 lbs.

Compliance: cULus, Dry location.

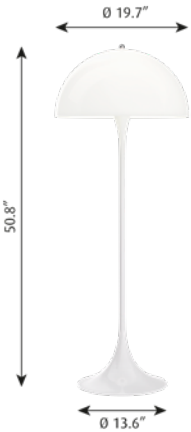

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PAN-F	White Opal Acryl	1x22W A-21/IF medium US	120V	5714693862894	10000155551
SPAREPART					ORDER NO.
PANTHELLA FLOOR UPPER TRUMPET					5744163305
PANTHELLA FLOOR LEGS WITH NUT & WASHER					5744610531

PH 3½-2½ FLOOR

Floor lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of handblown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and diffused light distribution.


Finish: Black metalized or high lustre chrome plated. White opal glass.

Material: Base: Black metalized or high lustre chrome plated, spun brass. Shades: Hand blown white opal glass. Top plate: Black metalized or high lustre chrome plated, spun brass. Stem: Black metalized or high lustre chrome plated, steel.

Mounting: Cord type: Black. Cord length: 12'. Switch: In-line on/off foot switch provided.

Weight: Max: 16 lbs.

Compliance: cULus, Dry location.

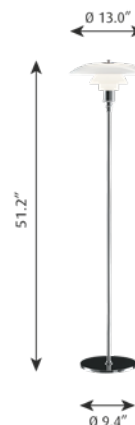

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	CABLE	EAN	ORDER NO.
PH3½2½-F	Black Metallised	1x15W A-19/medium	120V	Black cord	5703411567104	5744903879
PH3½2½-F	Brass Metallised	1x15W A-19/medium	120V	White cord	5703411096109	5744902032
PH3½2½-F	High Lustre Chrome Plated	1x15W A-19/medium	120V	Black cord	5703411127216	5744901376
SPAREPART						ORDER NO.
FOOT SWITCH, ON/OFF, BLACK						5717000000

PH 4¹/₂-3¹/₂ GLASS FLOOR

Floor lamps

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of hand blown opal three-layer glass, which is glossy on top and sandblasted matte on the underside, giving a soft and diffused light distribution.


Finish: High lustre chrome plated. White opal glass.

Material: Base: High lustre chrome plated, spun brass. Shades: Hand blown white opal glass. Anti-glare ring: Purple, spun aluminum. Top plate: High lustre chrome plated, spun brass. Stem: High lustre chrome plated, steel.

Mounting: Cord type: Black. Cord length: 7'. Switch: In-line on/off foot switch provided.

Weight: Max: 36 lbs.

Compliance: cULus, Dry location.

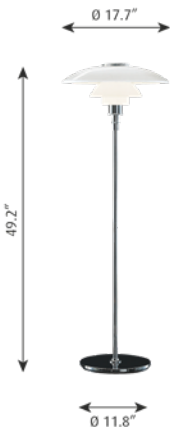

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH4 ¹ / ₂ -3 ¹ / ₂ -F	High Lustre Chrome Plated	1x15W A-19/IF medium US	120V	5703411153215	5844901266
SPAREPART					ORDER NO.
FOOT SWITCH, ON/OFF, BLACK					5717000000

PH 80

Floor lamps

Designer: Poul Henningsen

Description: The fixture emits a diffused, reflected, symmetrical light. The majority of the light is directed downward. The opal acrylic shades provide comfortable room lighting. On the original fixture, the red hue of the top reflector adds an intense, warm glow to the light. The black and white fixtures have a white top reflector that reflects the light for a clean, elegant look. The choice of light source will determine the color of the illumination.

Finish: White opal acrylic shades.

High lustre chrome plated stand with black, textured base.

Black stand with black, smooth base.

White stand with white, smooth base.

Chrome variant has a red top reflector.


Black and white variants have a white top reflector.

Material: Shades: High pressure molded white opal acrylic. Top reflector: Red or White polycarbonate. Top cover and base: Black or white, high pressure molded ABS. Stand: High lustre chrome plated or black or white, powder coated, steel.

Mounting: Cord type: Black. Cable length: 9'. Switch: In-line dimming foot switch provided.

Weight: Max: 17 lbs.

Compliance: cULus, Dry location.

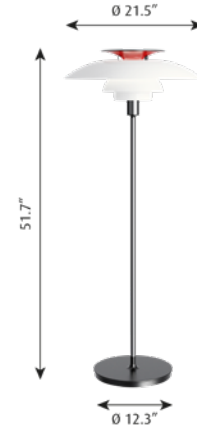

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	SWITCH/PLUG	EAN	ORDER NO.
PH80-F	White Opal Acryl/Black	1x70W A-21/CL medium US	120V	With dimmer	5714693985463	10000157285
PH80-F	White Opal Acryl/High Lustre Chrome Plated	1x70W A-21/CL medium US	120V	With dimmer	5714693985449	10000157284
PH80-F	White Opal Acrylic/White	1x70W A-21/CL medium US	120V	With dimmer	5714693985425	10000157283
SPAREPART						ORDER NO.
FOOT SWITCH, ON/OFF, BLACK						5717000000
PH 80, TOP SHADE						5744610298
PH 80, MIDDLE SHADE						5744610638
PH 80, LOWER SHADE						5744610641
PH 80, SOCKET COVER W/BRANCH						5744610654
PH 80, TOP ROUGE/BLACK						5744610667
PH 80 FLOOR, REBUILDING SET						5744610793
PH 80 TOP WHITE/BLACK						5744611530
PH 80 SOCKET COVER W/BRANCH BLK						5744611543
PH 80 TOP WHITE/WHITE						5744611556
PH 80 SOCKET COVER W/BRANCH WHT						5744611569

VL STUDIO TABLE/FLOOR

Floor lamps, Table lamps

Designer: Vilhelm Lauritzen

Description: The fixture emits a diffused, glare-free light. The triple-layered opal glass provides a comfortable light distribution and radiates a pleasantly delicate glow to its surroundings.


Finish: Matte-black, wet-painted; or brushed brass with fine hairlines. White opal glass, glossy. Clear-lacquered brass.

Material: Glass: Hand-blown, opal, triple-layered, glossy.
Housing: Deep-drawn aluminum or brass.

Mounting: Cable type: Black for black version and white on brass versions.
Cable length: 8.2 ft. In-line switch.
Ø150: On/off switch on cable.
Ø250 and Ø320: Electronic dimmer switch (requires dimmable lamp).
Glass shade can be removed to change the lamp.

Weight: Max. 7,9 kg.

Compliance: cULus, Dry location.

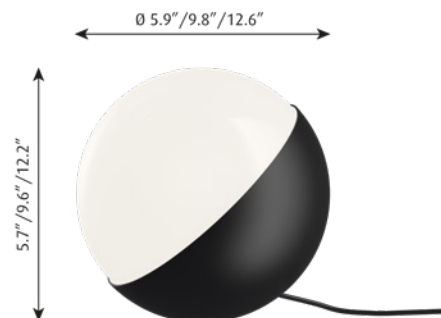

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	SWITCH/PLUG	CABLE	EAN	ORDER NO.
VLST-T	12.6 IN	Black	1x15W A-19/medium	120V	With dimmer	Black cord	5714693968602	5744908078
VLST-T	12.6 IN	Lacquered Brass	1x15W A-19/medium	120V	With dimmer	White cord	5714693968558	5744908120
VLST-T	5.9 IN	Black	1x5W G9	120V	With switch	Black cord	5714693956258	5744907875
VLST-T	5.9 IN	Lacquered Brass	1x5W G9	120V	With switch	White cord	5714693962501	5744907914
VLST-T	9.8 IN	Black			With dimmer	Black cord	5714693968701	5744907956
VLST-T	9.8 IN	Lacquered Brass	1x15W A-19/medium	120V	With dimmer	White cord	5714693968664	5744907998
SPAREPART								ORDER NO.
VL STUDIO 150 TABLE/WALL GLASS								5743151868
VL STUDIO 250 TABLE GLASS								5744167851
VL STUDIO 320 TABLE GLASS								5744167864
VL STUDIO TABLE/WALL GROMMET WHITE								5744167877
VL STUDIO TABLE/WALL GROMMET BLACK								5744167880

VL38 FLOOR

Floor lamps

Designer: Vilhelm Lauritzen

Description: The fixture emits downward directed light. The angle of the shade can be adjusted to optimize light distribution. The shade is painted white on the inside to ensure a soft comfortable light.


Finish: Brushed brass. Black or white, powder coated.

Material: Base: Die cast aluminum. Shade: Spun aluminum. Stem: Brushed brass.

Mounting: Cord type: White or black. Cord length: 10'. Switch: In-line High/low/off foot switch provided. LED driver: Separate, plugs into power outlet.

Weight: Max: 5 lbs.

Compliance: cULus, Dry location.

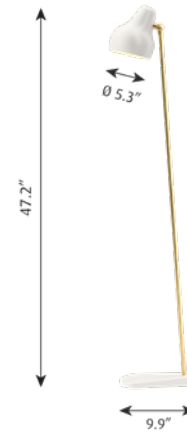

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	EAN	ORDER NO.
VL38-F	Black	LED 2700K 9.6W	416	120V	5703411630495	5744163208
VL38-F	White	LED 2700K 9.6W	416	120V	5703411682579	5744162270
SPAREPART						ORDER NO.
Adaptor 12V black						5744164867
Adaptor 12V white						5744164870
VL38 REPLACEMENT KIT LED W/WIRE						5744165963

YUH FLOOR

Floor lamps

Designer: GamFratesi

Description: The fixture primarily provides glare-free downward directed light. The angle of the shade can be adjusted to optimize light distribution. A slim opening in the top of the shade provides soft, ambient upward illumination. A mechanical system provides great freedom of movement, so the light can always be set in the ideal position in the workspace, living room etc. Built-in LED technology provides a high quality of light with stepless dimming from 100% to 15%. Optional timer capability automatically turns off the light after a chosen duration of 4 or 8 hours. Returns to the last dim level setting when switched on. A button at the top of the tube acts as switch and dimmer.


Finish: White or black. Matte wet painted. Brass/Marble versions: White or black shade. Matte wet painted. Clear lacquered, brushed brass stem. Matte marble base.

Material: Shade: Die cast aluminum. Base: Die cast aluminum (wet painted) or brushed marble. Marble: Italian Nero Margiua or White Carrara. Stem: Extruded brass (wet painted or clear lacquered).

Mounting: Cord type: White or black. Cord length: 10'. Switch: High/low/off switch on the base. LED driver: Separate, plugs into power outlet.

Weight: Max: 5 lbs.

Compliance: cULus, Dry location.

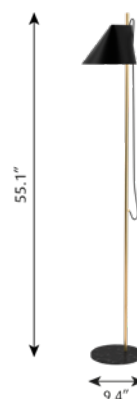

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
YUH-F	Black	LED 2700K 10W	446	120V	BLACK BASE	5703411664889	5744612539
YUH-F	Brass/Black	LED 2700K 10W	446	120V	BLACK MARBLE BASE	5714693076543	5744162678
YUH-F	Brass/White	LED 2700K 10W	446	120V	WHITE MARBLE BASE	5714693076338	5744162681
YUH-F	White	LED 2700K 10W	446	120V	WHITE BASE	5703411664926	5744612542
SPAREPART							ORDER NO.
Adaptor 12V black							5744164867
Adaptor 12V white							5744164870

AJ 50 WALL

Wall and Ceiling Outdoor

Designer: Arne Jacobsen

Description: The fixture emits downward directed light. The shade is painted white on the inside to ensure a soft comfortable light distribution.


Finish: Black, white or natural painted aluminum, textured powder coated.

Material: Back plate: Die cast aluminum. Shade: Die cast aluminum. LED enclosure: frosted glass.

Mounting: Surface: Mounted directly to finished surface over a 4” octagonal junction box.

Weight: Max: 4 lbs.

Compliance: cULus, Wet location.

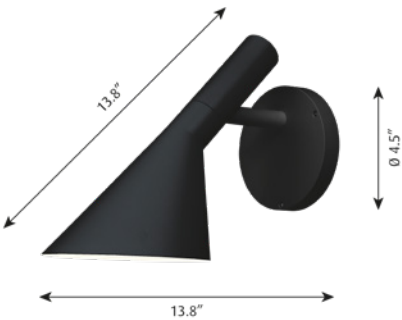

PRODUCT CODE	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	EAN	ORDER NO.
AJ-50-W	Black Texture	LED 3000K 8.9W	504	120V	5703411882801	5743909544
AJ-50-W	Natural Paint Aluminum	LED 3000K 8.9W	504	120V	5703411882764	5743909560
AJ-50-W	White Texture	LED 3000K 8.9W	504	120V	5703411882726	5743909557

AJ EKLIPTA OUTDOOR

Wall and Ceiling Outdoor

Designer: Arne Jacobsen

Description: The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer hand blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture.


Finish: White, powder coated. White opal glass.

Material: Ceiling/Wall box: Spun aluminum. Diffuser: Hand blown white opal glass.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box (13.7"/17.7") or 3" octagonal junction box (8.7").

Weight: Max: 11 lbs.

Compliance: cULus, Wet location.

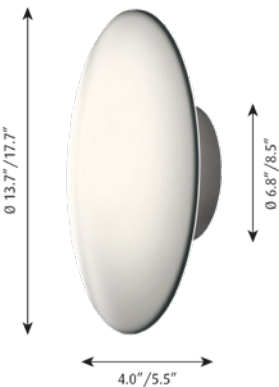

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	VOLTAGE	MOUNTING	EAN	ORDER NO.
AJE-W	13.7 IN	White	1x60W A-19/IF Medium US	120V	WALL AND SURFACE	5703411153338	5842905400
AJE-W	17.7 IN	White	1x100W A-19/IF medium US	120V	WALL AND SURFACE	5703411153307	5842905426
AJE-W	8.7 IN	White	1x40W G9	120V	WALL AND SURFACE	5703411115534	5743908011

FLINDT WALL

Wall and Ceiling Outdoor

Designer: Christian Flindt

Description: The fixture emits an asymmetrical glare-free, downward directed light distribution. Softly illuminating its cut-out shape while providing an efficient horizontal illumination on the ground or floor. Perfectly fit for indoor as well as outdoor applications.


Finish: Corten color, natural painted aluminum or white, powder coated.

Material: Front and back housing: Die cast aluminum.
Light Engine: Die cast aluminum and injection molded acrylic.

Mounting: Surface: Mounted directly to finished surface over a recessed 3 inch octagonal junction box (7.9 IN) or 4 inch octagonal junction box (11.8 IN/15.7 IN).

Weight: Max: 12 lbs.

Compliance: cULus, Wet location.

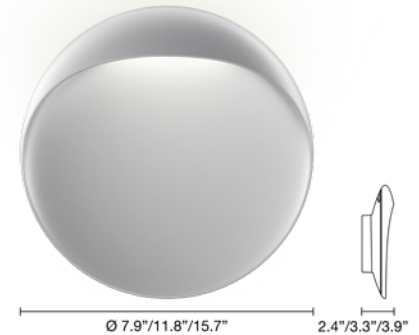

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LIGHTING CONTROL	LUMEN	VOLTAGE	EAN	ORDER NO.
FLJ-W	11.8 IN	Black Texture	LED 2700K	DIM 0-10V		120-277V/60HZ	5714693320981	5747930315
FLJ-W	11.8 IN	Black Texture	LED 3000K	DIM 0-10V		120-277V/60HZ	5714693321018	5747930328
FLJ-W	11.8 IN	Corten Color	LED 2700K 30W	DIM 0-10V	449	120-277V/60HZ	5703411844229	5747912786
FLJ-W	11.8 IN	Corten Color	LED 3000K 30W	DIM 0-10V	463	120-277V/60HZ	5703411843062	5747912799
FLJ-W	11.8 IN	Natural Paint Aluminum	LED 2700K 30W	DIM 0-10V	495	120-277V/60HZ	5703411847022	5747912744
FLJ-W	11.8 IN	Natural Paint Aluminum	LED 3000K 30W	DIM 0-10V	510	120-277V/60HZ	5703411847060	5747912757
FLJ-W	11.8 IN	White Texture	LED 2700K 30W	DIM 0-10V	680	120-277V/60HZ	5703411843260	5747912825
FLJ-W	11.8 IN	White Texture	LED 3000K 30W	DIM 0-10V	701	120-277V/60HZ	5703411843307	5747912838
FLJ-W	15.7 IN	Black Texture	LED 2700K	DIM 0-10V		120-277V/60HZ	5714693308514	5747930357
FLJ-W	15.7 IN	Black Texture	LED 3000K	DIM 0-10V		120-277V/60HZ	5714693308545	5747930360
FLJ-W	15.7 IN	Corten Color	LED 2700K 30W	DIM 0-10V	680	120-277V/60HZ	5703411843826	5747912906
FLJ-W	15.7 IN	Corten Color	LED 3000K 30W	DIM 0-10V	701	120-277V/60HZ	5703411843864	5747912919
FLJ-W	15.7 IN	Natural Paint Aluminum	LED 2700K 30W	DIM 0-10V	751	120-277V/60HZ	5703411843581	5747912867
FLJ-W	15.7 IN	Natural Paint Aluminum	LED 3000K 30W	DIM 0-10V	774	120-277V/60HZ	5703411843628	5747912870
FLJ-W	15.7 IN	White Texture	LED 2700K 30W	DIM 0-10V	1020	120-277V/60HZ	5703411844069	5747912948
FLJ-W	15.7 IN	White Texture	LED 3000K 30W	DIM 0-10V	1052	120-277V/60HZ	5703411844106	5747912951
FLJ-W	7.9 IN	Black Texture	LED 2700K	PHASE DIMMING (MAINS DIMM)		120-277V/60HZ	5714693320882	5747930276
FLJ-W	7.9 IN	Black Texture	LED 3000K	PHASE DIMMING (MAINS DIMM)		120-277V/60HZ	5714693308705	5747930289
FLJ-W	7.9 IN	Corten Color	LED 2700K 10W	PHASE DIMMING (MAINS DIMM)	326	120-277V/60HZ	5703411845332	5747912663
FLJ-W	7.9 IN	Corten Color	LED 3000K 10W	PHASE DIMMING (MAINS DIMM)	336	120-277V/60HZ	5703411845370	5747912676
FLJ-W	7.9 IN	Natural Paint Aluminum	LED 2700K 10W	PHASE DIMMING (MAINS DIMM)	359	120-277V/60HZ	5703411844595	5747912621
FLJ-W	7.9 IN	Natural Paint Aluminum	LED 3000K 10W	PHASE DIMMING (MAINS DIMM)	371	120-277V/60HZ	5703411844632	5747912634
FLJ-W	7.9 IN	White Texture	LED 2700K 10W	PHASE DIMMING (MAINS DIMM)	494	120-277V/60HZ	5703411845998	5747912702
FLJ-W	7.9 IN	White Texture	LED 3000K 10W	PHASE DIMMING (MAINS DIMM)	509	120-277V/60HZ	5703411846131	5747912715

NYHAVN WALL

Wall and Ceiling Outdoor

Designer: Alfred Homann & Ole V. Kjær

Description: The conical shade ensures comfortable light that is directed downwards in a wide beam. The shade interior has a white matte painted surface, ensuring uniform light distribution. The rings ensure that a stray light is controlled, and direct a small amount of light onto the top side of the shade for self-illumination.


Finish: Copper, brushed or white, wet painted.

Material: Shades: Spun aluminum or spun copper. Diffuser: Clear glass. Top: Spun aluminum or spun copper. Mounting box: Die cast aluminum. Mounting box cover: Spun aluminum or spun copper. Arm: Copper plated, red brass or steel.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max: 11 lbs.

Compliance: cULus, Wet location.

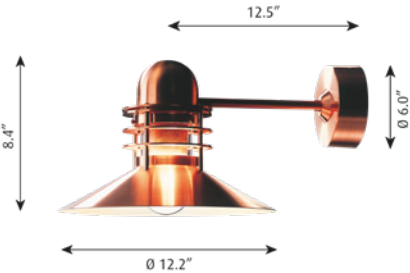

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	SHIELD/DIFFUSER	EAN	ORDER NO.
NYH-W	Brushed Copper	1x15W A-19/medium	120V	CLEAR	5703411124727	5743909379
NYH-W	White	1x15W A-19/medium	120V	CLEAR	5703411124710	5743909366

PH 3-2½ WALL

Wall and Ceiling Outdoor

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades have a matte white painted interior surface, diffusing the light in a comfortable way.


Finish: Black, powder coated.

Material: Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Die formed glass. Mounting plate: Die cast aluminum. Mounting plate cover: Spun aluminum. Arm: Stainless steel.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max: 6 lbs.

Compliance: cULus, Wet location.

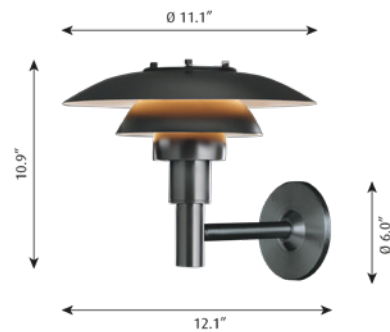

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH32½-W	Black	1x15W A-19/medium	120V	5703411178812	5743900022

PH WALL

Wall and Ceiling Outdoor

Designer: Poul Henningsen


Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the light downwards. The shades have a matte white painted inside to ensure diffuse, comfortable light distribution.

Finish: Copper, brushed. Please note that the copper surface is untreated in order to achieve a verdigris finish over time. This can result in an inconsistent surface finish prior to the product achieving full patina. This process might have begun already during stocking/ transportation.

Material: Shades: Spun copper. Wall box: Spun copper. Arm: Copper.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box. Requires three bolts on 5.2IN circle.

Compliance: cULus, Wet location.

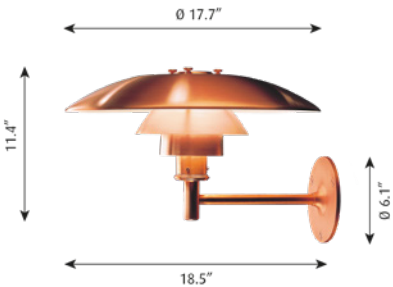

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH-W	Brushed Copper	1x15W E26	120V	5714693806416	5743909489

SKOT WALL

Wall and Ceiling Outdoor

Designer: LK as

Description: The fixture is available with two types of distribution: symmetric or asymmetric. The asymmetric is only recommended for wall mounting. The opal diffuser creates a soft light distribution.


Finish: Natural painted aluminum or silver, powder coated.

Material: Diffuser: Injection molded white opal polycarbonate. Base/cross guard: Die cast aluminum.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max: 7 lbs.

Compliance: cULus, Wet location.

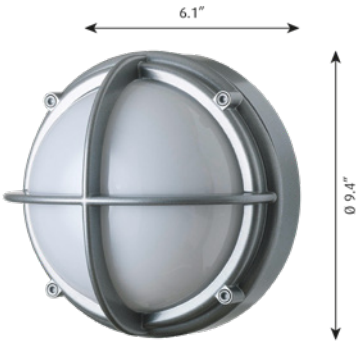

PRODUCT CODE	FINISH	LIGHT SOURCE	LIGHT TECHNIQUE	LUMEN	VOLTAGE	SHIELD/DIFFUSER	EAN	ORDER NO.
SKT-WC	Natural Paint Aluminum	LED 3000K 15W	ASYMMETRIC	308	120-277V/60HZ	OPAL HALF SHADED	5703411631720	5743911516
SKT-WC	Natural Paint Aluminum	LED 3000K 15W	SYMMETRIC	438	120-277V/60HZ	OPAL	5703411631737	5743911503
SKT-WC	Silver Grey	LED 3000K 15W	ASYMMETRIC	308	120-277V/60HZ	OPAL HALF SHADED	5703411631805	5743911435
SKT-WC	Silver Grey	LED 3000K 15W	SYMMETRIC	438	120-277V/60HZ	OPAL	5703411631812	5743911422

TOLDBOD 6.1 WALL

Wall and Ceiling Outdoor

Designer: Louis Poulsen A/S

Description: The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.


Finish: Black or natural painted aluminum, powder coated.

Material: Shield: Tempered sand blasted glass. Wall plate: Die cast aluminum. Luminaire head: Die cast aluminum. Arm: Extruded aluminum.

Mounting: Surface: Mounted directly to finished surface over a recessed 4" octagonal junction box.

Weight: Max. 3.5 lbs.

Compliance: cULus, Wet location.

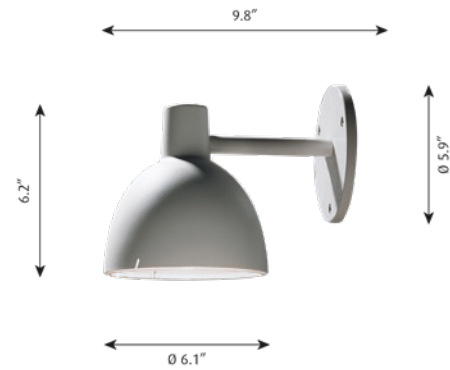

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
TOL155-W	Black Texture	1x10W G16.5/IF Candelabra US	120V	5703411189801	5743911736
TOL155-W	Natural Paint Aluminum	1x10W G16.5/IF Candelabra US	120V	5703411189764	5743911723

AJ GARDEN BOLLARD

Bollard

Designer: Arne Jacobsen

Description: This outdoor lamp emits a pleasant, fully shaded, downwardly directed, glare-free light. It is available in two different heights and has a fixed head. The inside of the shade is painted white to ensure a soft and pleasant reflection of light. The shape of the shade provides superior lighting, allowing an optimal view of its surroundings. The garden bollard can be fitted with three different installation types – namely a base plate, a spike, or an anchor.

Finish: Outside: Black textured surface, powder-coated.
Inside: White, wet-painted.

Material: Head: Cast aluminum. Stem and base plate: Stainless steel.
Spike: Cast aluminum with ABS housing.
Anchor: Steel.
Diffuser: Injection-molded opal PC.


Mounting: The bollard requires a separate, 24V DC power supply.
Choice of 3 different mounting types.

Spike mounted bollard: For use in soil or gravel; includes weather-proof cables and connectors for above-ground runs. Plug and play.
Anchor mounted bollard: for casting in new concrete pad.
Base mounted bollard: Includes baseplate for anchoring to decks and floors.

Anchor or Base mounted bollards: installation determined by certified electrician with below ground cabling and conduit.

Weight: Max. 4 lbs.

Compliance: Ingress protection: IP 65.
IK06

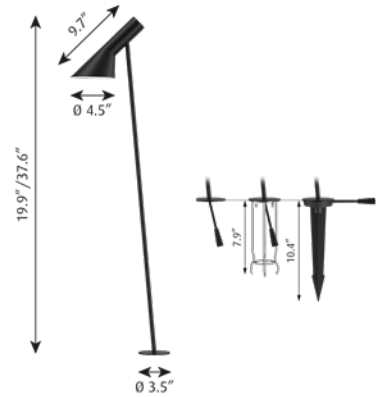

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LUMEN	MOUNTING	EAN	ORDER NO.
AJG-B	LONG	Black Texture	LED 2700K	454	Spike w/o power supply	5714693238392	10000163690
AJG-B	LONG	Black Texture	LED 2700K	454	Base w/o power supply	5714693238422	10000163723
AJG-B	LONG	Black Texture	LED 2700K	524	Anchor w/o power supply	5714693238453	10000163726
AJG-B	LONG	Black Texture	LED 3000K	454	Spike w/o power supply	5714693238385	10000163689
AJG-B	LONG	Black Texture	LED 3000K	454	Base w/o power supply	5714693238415	10000163722
AJG-B	LONG	Black Texture	LED 3000K	524	Anchor w/o power supply	5714693238446	10000163725
AJG-B	SHORT	Black Texture	LED 2700K	524	Spike w/o power supply	5714693238354	10000163687
AJG-B	SHORT	Black Texture	LED 2700K	524	Base w/o power supply	5714693238484	10000163729
AJG-B	SHORT	Black Texture	LED 2700K	454	Anchor w/o power supply	5714693238514	10000163732
AJG-B	SHORT	Black Texture	LED 3000K	524	Base w/o power supply	5714693238477	10000163728
AJG-B	SHORT	Black Texture	LED 3000K	454	Anchor w/o power supply	5714693238507	10000163731
AJG-B	SHORT	Black Texture	LED 3000K	524	Spike w/o power supply	5714693238347	10000163686
SPAREPART							ORDER NO.
T-Connector for Spike-Mount Garden Bollards							5747405303
Extension Cable 16.4 Ft For Spike-Mount Garden Bollards							5747405316
AJ GARDEN ANCHOR + SCREWS/WASHERS							5747406195
AJ GARDEN SPIKE+BASE BLK + SCREWS							5747406205
AJ GARDEN SPARE BASE SCREWS (4 PCS)							5747406218
AJ GARDEN REP:KIT COB/PCB 4K							5747406221
AJ GARDEN REP:KIT COB/PCB 3K							5747406234
AJ GARDEN REP:KIT COB/PCB 27K							5747406247
AJ GARDEN DIFFUSER KIT							5747407055

BYSTED GARDEN BOLLARD

Bollard

Designer: Peter Bysted

Description: The fixture has a round symmetrical design with four rings reflecting the light in a soft downward direction. The rings have a soft glow while their white undersides achieve optimal light reflection and produce a characteristic symmetrical light pattern on the ground.

Finish: Top: Cast aluminum. Reflector part: Cast aluminum. Post: Extruded aluminum. Base plate, spike, and anchor: Cast aluminum. Diffuser: PC

Material: Top: Cast aluminum. Reflector part: Cast aluminum. Post: Extruded aluminum. Base plate, spike, and anchor: Cast aluminum. Diffuser: PC

Mounting: The bollard requires a separate, 24V DC power supply. Choice of 3 different mounting types.

Spike mounted bollard(Plug&Play): For use in soil or gravel; includes weather-proof cables and connectors for above-ground runs.


Anchor mounted bollard(certified electrician): for casting in new concrete pad.

Base mounted bollard(certified electrician): Includes baseplate for anchoring to decks and floors.

Anchor or Base mounted bollards: installation determined by certified electrician with below ground cabling and conduit.

Weight: Max. 6 kg.

Compliance: cULus, Wet location.

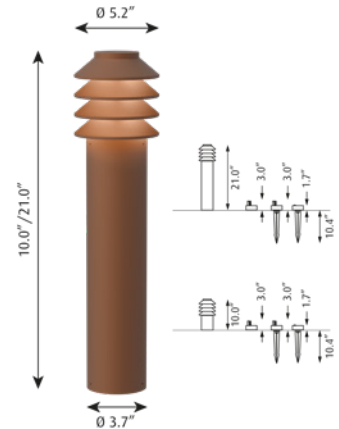

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
BYSG-B	LONG	Black Texture	LED 2700K		24V	Spike w/o power supply	5714693309214	5747409668
BYSG-B	LONG	Black Texture	LED 2700K		24V	Anchor w/o power supply	5714693309856	5747409639
BYSG-B	LONG	Black Texture	LED 2700K		24V	Base w/o power supply	5714693310593	5747409600
BYSG-B	LONG	Black Texture	LED 3000K		24V	Anchor w/o power supply	5714693310326	5747409626
BYSG-B	LONG	Black Texture	LED 3000K		24V	Base w/o power supply	5714693310746	5747409590
BYSG-B	LONG	Black Texture	LED 3000K		24V	Spike w/o power supply	5714693320905	5747409655
BYSG-B	LONG	Corten Color	LED 2700K 14W	247	24V	Base w/o power supply	5714693845156	5747404579
BYSG-B	LONG	Corten Color	LED 2700K 14W	247	24V	Anchor w/o power supply	5714693845576	5747404595
BYSG-B	LONG	Corten Color	LED 3000K 14W	259	24V	Anchor w/o power supply	5714693845361	5747404582
BYSG-B	LONG	Corten Color	LED 3000K 14W	259	24V	Base w/o power supply	5714693844944	5747404566
BYSG-B	LONG	Natural Paint Aluminum	LED 2700K 14W	275	24V	Base w/o power supply	5714693839698	5747404919
BYSG-B	LONG	Natural Paint Aluminum	LED 2700K 14W	275	24V	Anchor w/o power supply	5714693840328	5747404948
BYSG-B	LONG	Natural Paint Aluminum	LED 3000K 14W	288	24V	Base w/o power supply	5714693839483	5747404906
BYSG-B	LONG	Natural Paint Aluminum	LED 3000K 14W	288	24V	Anchor w/o power supply	5714693840113	5747404935
BYSG-B	LONG	Natural Paint Aluminum	LED 4000K 14W	324	24V	Base w/o power supply	5714693839278	5747404896
BYSG-B	LONG	Natural Paint Aluminum	LED 4000K 14W	324	24V	Anchor w/o power supply	5714693839902	5747404922
BYSG-B	SHORT	Black Texture	LED 2700K		24V	Spike w/o power supply	5714693311170	5747409574
BYSG-B	SHORT	Black Texture	LED 2700K		24V	Anchor w/o power supply	5714693311880	5747409545
BYSG-B	SHORT	Black Texture	LED 2700K		24V	Base w/o power supply	5714693312504	5747409516
BYSG-B	SHORT	Black Texture	LED 3000K		24V	Spike w/o power supply	5714693311491	5747409561
BYSG-B	SHORT	Black Texture	LED 3000K		24V	Anchor w/o power supply	5714693312177	5747409532
BYSG-B	SHORT	Black Texture	LED 3000K		24V	Base w/o power supply	5714693312719	5747409503
BYSG-B	SHORT	Corten Color	LED 2700K 14W	247	24V	Base w/o power supply	5714693843893	5747404511
BYSG-B	SHORT	Corten Color	LED 2700K 14W	247	24V	Anchor w/o power supply	5714693844319	5747404537
BYSG-B	SHORT	Corten Color	LED 3000K 14W	259	24V	Base w/o power supply	5714693843688	5747404508
BYSG-B	SHORT	Corten Color	LED 3000K 14W	259	24V	Anchor w/o power supply	5714693844104	5747404524
BYSG-B	SHORT	Natural Paint Aluminum	LED 2700K 14W	275	24V	Base w/o power supply	5714693837809	5747404825
BYSG-B	SHORT	Natural Paint Aluminum	LED 2700K 14W	275	24V	Anchor w/o power supply	5714693838431	5747404854
BYSG-B	SHORT	Natural Paint Aluminum	LED 3000K 14W	288	24V	Base w/o power supply	5714693837595	5747404812
BYSG-B	SHORT	Natural Paint Aluminum	LED 3000K 14W	288	24V	Anchor w/o power supply	5714693838226	5747404841

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
BYSG-B	SHORT	Natural Paint Aluminum	LED 4000K 14W	324	24V	Base w/o power supply	5714693837380	5747404809
BYSG-B	SHORT	Natural Paint Aluminum	LED 4000K 14W	324	24V	Anchor w/o power supply	5714693838011	5747404838
SPAREPART								ORDER NO.
T-Connector for Spike-Mount Garden Bollards								5747405303
Extension Cable 16.4 Ft For Spike-Mount Garden Bollards								5747405316

FLINDT GARDEN BOLLARD

Bollard

Designer: Christian Flindt

Description: The fixture emits a wide downward directed glare-free light. The light source rests at the top inside the asymmetric carving on the side of the bollard, where the gradient serves as a reflector that softens the light and forms a pleasant organic shape on the ground below.

Finish: Natural painted aluminum or corten colored. Textured surface, powder coated.

Material: Top: Cast aluminum. Reflector part: Cast aluminum. Post: Extruded aluminum. Base plate: Cast aluminum.

Mounting: The bollard requires a separate, 24V DC power supply. Choice of 3 different mounting types.


Spike mounted bollard(Plug&Play): For use in soil or gravel; includes weather-proof cables and connectors for above-ground runs.

Anchor mounted bollard(certified electrician): for casting in new concrete pad.

Base mounted bollard(certified electrician): Includes baseplate for anchoring to decks and floors.

Anchor or Base mounted bollards: installation determined by certified electrician with below ground cabling and conduit.

Compliance: cULus, Wet location.

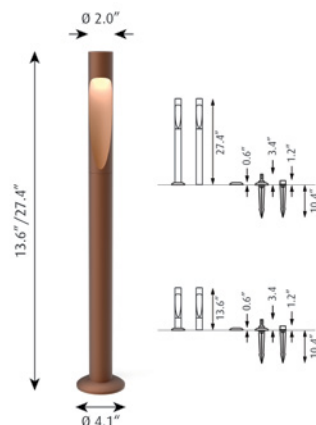

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
FLIG-B	LONG	Black Texture	LED 2700K 6.5W		24V	Spike w/o power supply	5714693315277	5747409008
FLIG-B	LONG	Black Texture	LED 2700K 6.5W		24V	Anchor w/o power supply	5714693315949	5747408973
FLIG-B	LONG	Black Texture	LED 2700K 6.5W		24V	Base w/o power supply	5714693316632	5747408944
FLIG-B	LONG	Black Texture	LED 2700K 6.5W		24V	Spike w/o power supply	5714693317202	5747408821
FLIG-B	LONG	Black Texture	LED 3000K 6.5W		24V	Spike w/o power supply	5714693315581	5747408999
FLIG-B	LONG	Black Texture	LED 3000K 6.5W		24V	Anchor w/o power supply	5714693316175	5747408960
FLIG-B	LONG	Black Texture	LED 3000K 6.5W		24V	Base w/o power supply	5714693316816	5747408931
FLIG-B	LONG	Black Texture	LED 3000K 6.5W		24V	Spike w/o power supply	5714693317288	5747408818
FLIG-B	LONG	Corten Color	LED 2700K 6.5W	215	24V	Spike w/o power supply	5714693006656	10000158335
FLIG-B	LONG	Corten Color	LED 2700K 6.5W	215	24V	Base w/o power supply	5714693639434	5747402571
FLIG-B	LONG	Corten Color	LED 2700K 6.5W	215	24V	Anchor w/o power supply	5714693651825	5747402607
FLIG-B	LONG	Corten Color	LED 3000K 6.5W	215	24V	Anchor w/o power supply	5714693639014	5747402597
FLIG-B	LONG	Corten Color	LED 3000K 6.5W	215	24V	Base w/o power supply	5714693639649	5747402568
FLIG-B	LONG	Corten Color	LED 3000K 6.5W	215	24V	Spike w/o power supply	5714693006571	10000158331
FLIG-B	LONG	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Spike w/o power supply	5714693006632	10000158334
FLIG-B	LONG	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Anchor w/o power supply	5714693631247	5747402966
FLIG-B	LONG	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Base w/o power supply	5714693631872	5747402937
FLIG-B	LONG	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Spike w/o power supply	5714693006557	10000158330
FLIG-B	LONG	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Anchor w/o power supply	5714693631452	5747402953
FLIG-B	LONG	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Base w/o power supply	5714693632084	5747402924
FLIG-B	SHORT	Black Texture	LED 2700K 6.5W		24V	Spike w/o power supply	5714693317264	5747408915
FLIG-B	SHORT	Black Texture	LED 2700K 6.5W		24V	Spike w/o power supply	5714693317752	5747408795
FLIG-B	SHORT	Black Texture	LED 2700K 6.5W		24V	Anchor w/o power supply	5714693318001	5747408889
FLIG-B	SHORT	Black Texture	LED 2700K 6.5W		24V	Base w/o power supply	5714693318612	5747408850
FLIG-B	SHORT	Black Texture	LED 3000K 6.5W		24V	Spike w/o power supply	5714693317622	5747408902
FLIG-B	SHORT	Black Texture	LED 3000K 6.5W		24V	Spike w/o power supply	5714693317998	5747408782
FLIG-B	SHORT	Black Texture	LED 3000K 6.5W		24V	Anchor w/o power supply	5714693318148	5747408876
FLIG-B	SHORT	Black Texture	LED 3000K 6.5W		24V	Base w/o power supply	5714693318896	5747408847
FLIG-B	SHORT	Corten Color	LED 2700K 6.5W	215	24V	Spike w/o power supply	5714693006779	10000158341
FLIG-B	SHORT	Corten Color	LED 2700K 6.5W	215	24V	Anchor w/o power supply	5714693640690	5747402513
FLIG-B	SHORT	Corten Color	LED 2700K 6.5W	215	24V	Base w/o power supply	5714693641321	5747402487
FLIG-B	SHORT	Corten Color	LED 3000K 6.5W	215	24V	Spike w/o power supply	5714693006694	10000158337

PRODUCT CODE	DIMENSIONS	FINISH	LIGHT SOURCE	LUMEN	VOLTAGE	MOUNTING	EAN	ORDER NO.
FLIG-B	SHORT	Corten Color	LED 3000K 6.5W	215	24V	Anchor w/o power supply	5714693640904	5747402500
FLIG-B	SHORT	Corten Color	LED 3000K 6.5W	215	24V	Base w/o power supply	5714693641536	5747402474
FLIG-B	SHORT	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Spike w/o power supply	5714693006755	10000158340
FLIG-B	SHORT	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Anchor w/o power supply	5714693646159	5747402872
FLIG-B	SHORT	Natural Paint Aluminum	LED 2700K 6.5W	252	24V	Base w/o power supply	5714693646784	5747402843
FLIG-B	SHORT	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Spike w/o power supply	5714693006670	10000158336
FLIG-B	SHORT	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Anchor w/o power supply	5714693646364	5747402869
FLIG-B	SHORT	Natural Paint Aluminum	LED 3000K 6.5W	252	24V	Base w/o power supply	5714693646999	5747402830
SPAREPART								ORDER NO.
T-Connector for Spike-Mount Garden Bollards								5747405303
Extension Cable 16.4 Ft For Spike-Mount Garden Bollards								5747405316

PH 3-2½ BOLLARD

Bollard

Designer: Poul Henningsen

Description: The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades have a matte white painted interior surface, diffusing the light in a comfortable way.

Finish: Black, powder coated.

Material: Top shade: Spun stainless steel. Middle/lower shade: Spun stainless steel. Shadeholder: Die formed glass. Post: Stainless steel. Base plate: Stainless steel.

Mounting: Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download for installation details.

Weight: Max: 8 lbs.

Compliance: cULus, Wet location.



PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	EAN	ORDER NO.
PH32½-B	Black	1x15W A-19/IF Medium US	120V	5703411139745	10000124039

TOLDBOD 6.1 BOLLARD

Bollard

Designer: Louis Poulsen A/S

Description: The light is directed 100% downwards and the shade has a matte white painted interior emitting a soft, diffused, comfortable light.


Finish: Black, powder coated.

Material: Shield: Tempered sand blasted glass. Luminaire head: Die cast aluminum. Post: Extruded aluminum. Base plate: Aluminum.

Mounting: Base plate dimension: 6" diameter. Base plate: Mounted to a concrete base with 3 anchor bolts on a bolt circle of 3.54" diameter. Installation: Refer to mounting instruction download for installation details.

Weight: Max: 5 lbs.

Compliance: cULus, Wet location.

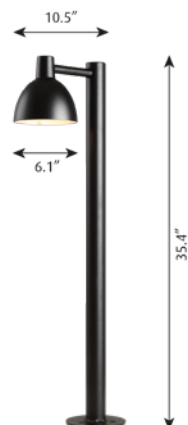

PRODUCT CODE	FINISH	LIGHT SOURCE	VOLTAGE	POLE TYPE	EAN	ORDER NO.
TOL-155-B	Black Texture	1x40W G16.5/IF Candelabra US	120V		5703411152768	5847901402
TOL-155-B	Black Texture	G16.5/IF candelabra	120V	POST W/BASE PLATE	5703411195963	5747916449

Contents

alphabetic

Above	6	PH 4½-3½ Glass Floor	87
AJ 50 Wall	92	PH 4½-3½ Glass Table	65
AJ Eklipta Outdoor	93	PH 4½-4 Glass Pendant	28
AJ Eklipta Surface	4	PH 5	29
AJ Eklipta Wall	68	PH 5-4½ & PH 6½-6	33
AJ Floor	81	PH 5/5 Pendant	32
AJ Garden Bollard	100	PH 5 Anniversary	30
AJ Mini Anniversary	48	PH 5 Mini	31
AJ Mini Table	49	PH 80	88
AJ Oxford Table Lamp	50	PH Artichoke	34
AJ Royal	7	PH Artichoke Anniversary	36
AJ Table	51	PH Artichoke Glass	37
AJ Wall	69	PH Hat	76
Bysted Garden Bollard	101	PH Louvre	38
Cirque	8	PH Septima	39
Doo-Wop	9	PH Snowball	40
Enigma 425	10	PH Wall	97
Enigma 545	11	Skot Wall	98
Flindt Garden Bollard	103	Toldbod 6.1/8.7 Glass Pendant	41
Flindt Wall	94	Toldbod 6.1 Bollard	106
Keglen	12	Toldbod 6.1 Wall	99
Keglen Floor	82	Toldbod Pendant	42
Keglen Table	52	VL38 Floor	90
Keglen Wall	70	VL38 Table	66
LC Shutters	14	VL38 Wall	79
LP Grand Surface	5	VL45 Radiohus Pendant	46
LP Grand Suspended	15	VL 56 Pendant	43
LP Grand Wall	71	VL Ring Crown 1	44
LP Slim Round Wall	72	VL Ring Crown 3-5-7	45
Moonsetter	83	VL Ring Crown Wall	77
Moser	17	VL Studio Table/Floor	89
NJP Floor	84	VL Studio Wall	78
NJP Mini	53	Wohlert	47
NJP Table	54	Yuh Floor	91
NJP Wall	73	Yuh Table	67
Nyhavn Wall	95	Yuh Wall	80
OE Quasi Light	18		
Panthella 160 Portable	55		
Panthella 250 Table Lamp	56		
Panthella 320 Table Lamp	57		
Panthella 400 Table Lamp	58		
Panthella Floor	85		
Patera	19		
Patera Oval	20		
PH 2/1 Pendant	21		
PH 2/1 Portable	59		
PH 2/1 Stem Fitting	22		
PH 2/1 Table	60		
PH 2/1 Wall	74		
PH 3-2½ Bollard	105		
PH 3-2½ Wall	96		
PH 3/2 Glass Table	61		
PH 3/2 Pendant	23		
PH 3/2 Wall	75		
PH 3/3 Pendant	24		
PH 3½-2½ Floor	86		
PH 3½-2½ Glass Table	62		
PH 3½-2½ Table	63		
PH 3½-3 Glass Pendant	25		
PH 3½-3 Pendant	26		
PH 4/3 Pendant	27		
PH 4/3 Table	64		

louispoulsen.com