

ASSEMBLY INSTRUCTIONS FOR #116362 (214159-2)

FIG.A


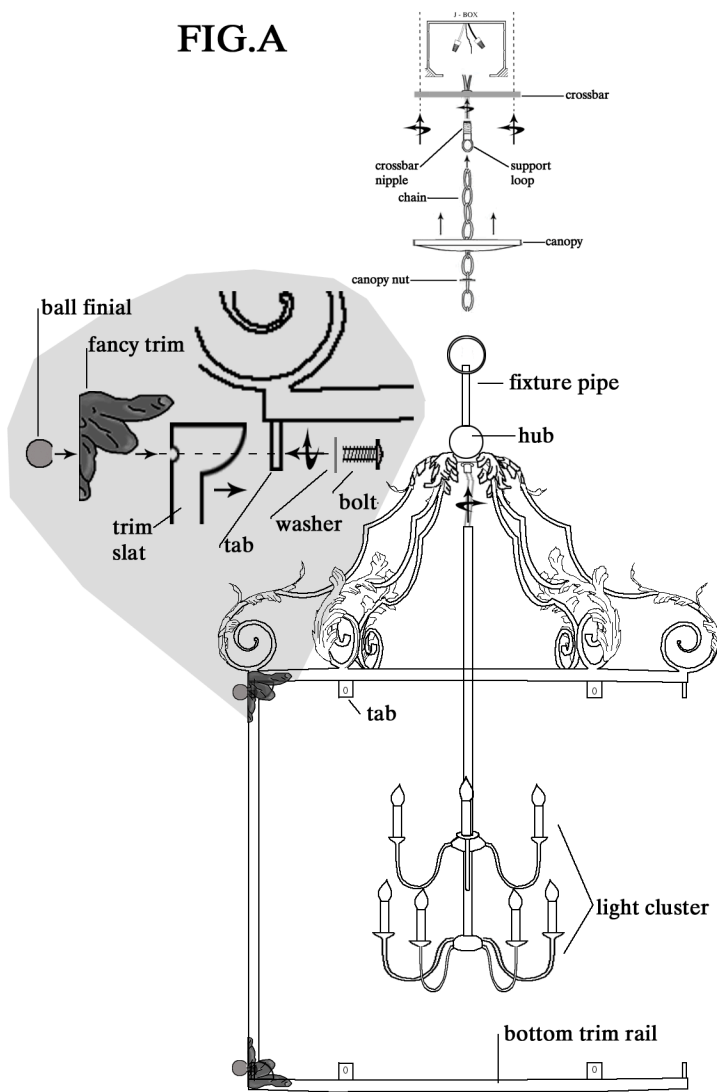


FIG.B

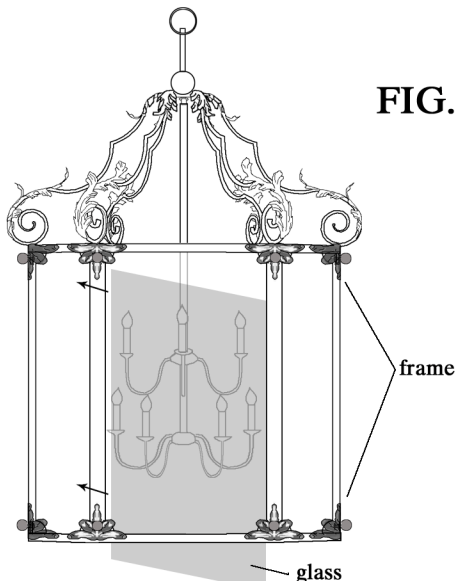

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

1. Screw crossbar nipple w/support loop into crossbar. Attach crossbar to secure location.

2. Attach chain to fixture loop, place canopy nut than canopy onto chain, attach chain to support loop. FIG.A

3. Place fixture wire up through hub & fixture pipe. Screw light cluster into hub. Thread fixture wire through chain, canopy nut, canopy, support loop, crossbar nipple.

4. Wire as per local electrical code.

5. Slide canopy up to ceiling, slide canopy nut up and screw onto support loop, tighten to canopy.

6. Place bolt through tab, place trim slat onto bolt, place fancy trim onto bolt, screw ball finial onto bolt and tighten to fancy trim, repeat for all corners. Repeat for bottom trim rail. FIG.A

7. Place glass into frame and secure with washer and nut provided. You must attach four consecutive panels, slide fifth panel in and over panel four, attach panel six than slide panel five into place and attach. FIG.B



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com