

FIG.A


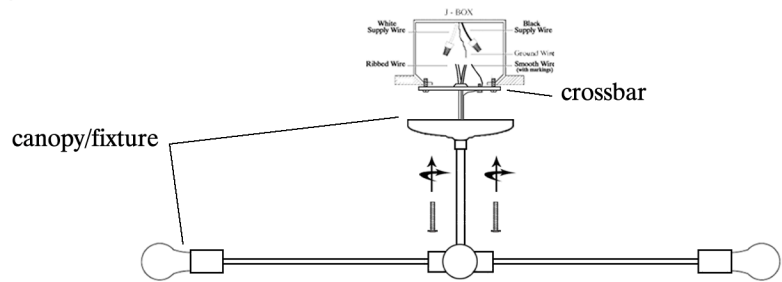


FIG.B

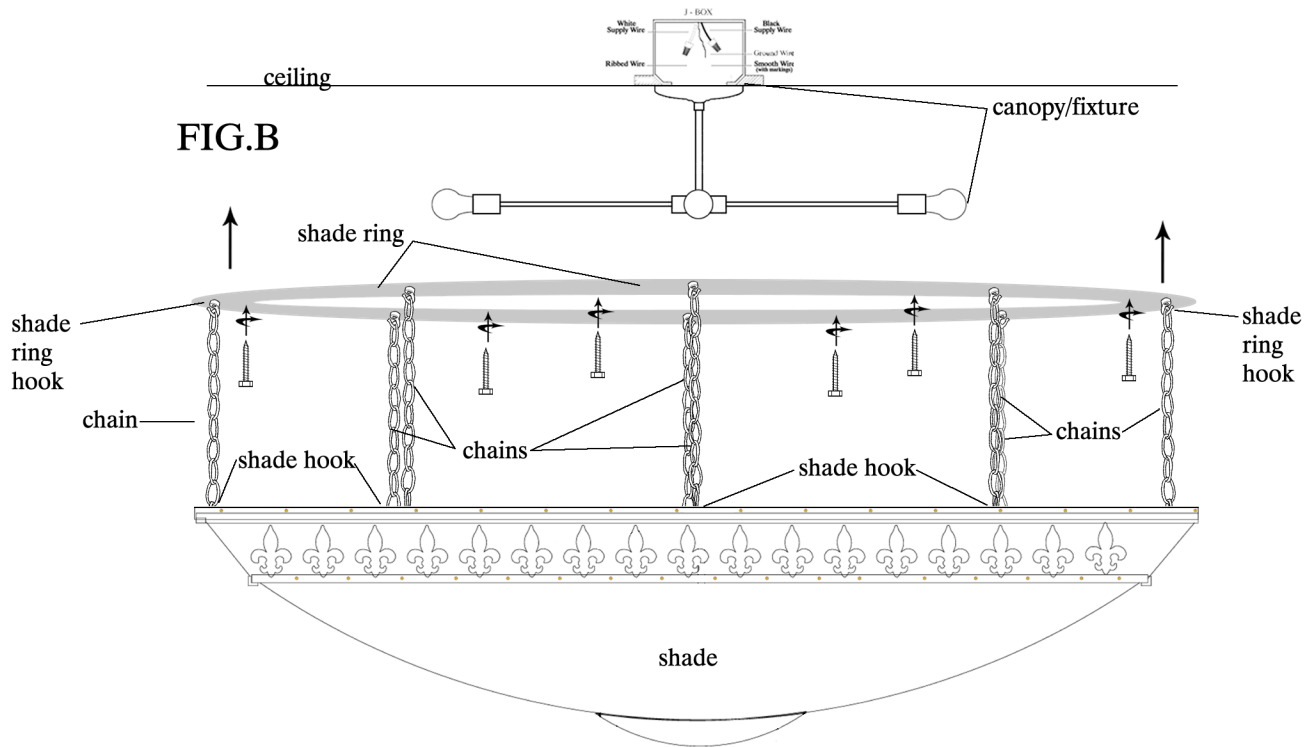

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Attach crossbar to j box. FIG.A
2. Attach canopy/fixture to crossbar. DO NOT TIGHTEN. Make sure to leave j box wire and fixture wire exposed. FIG.A
3. Wire as per local electrical code.
4. Place connected wires into j box. Tighten canopy/fixture to ceiling. FIG.A
5. Attach shade ring to secure ceiling beams.
6. Place chins onto shade ring hooks. FIG.B
7. Attach chains to shade hooks. FIG.B
8. Place light bulbs into sockets.
9. Move shade up and attach with one link of chain between shade ring hook and shade hook. FIG.B



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)

