


ASSEMBLY INSTRUCTIONS FOR #122540 /48259-97

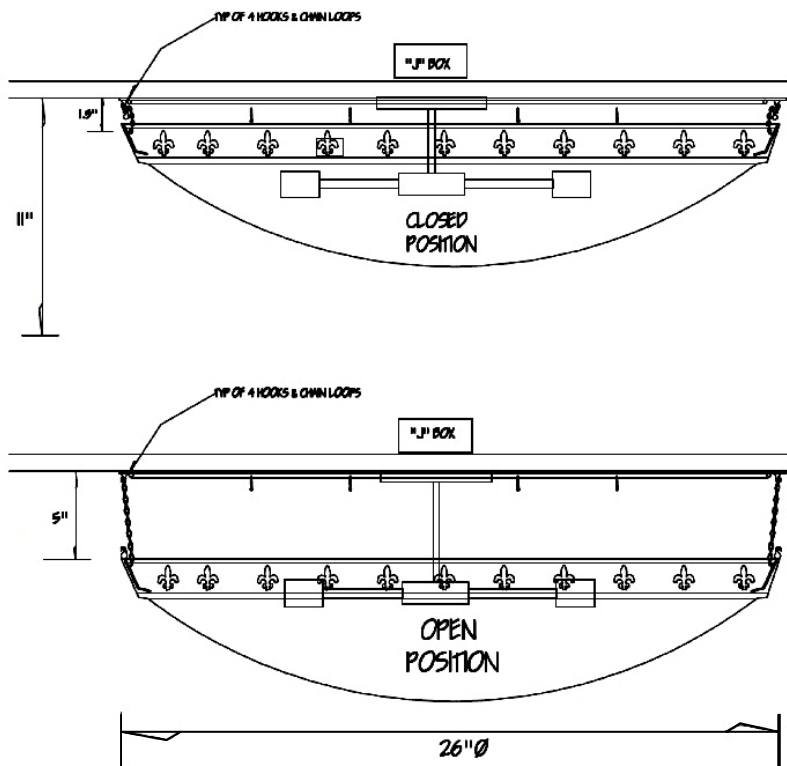

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED.

1.) INSTALLERS TO USE BLOCKING TO ATTACH THE METAL RING TO THE CEILING THEN INSTALL THE LIGHT CLUSTER DIRECTLY TO JUNCTION BOX (SINCE FRAME /SHADE ARE SUPPORTED SEPARATELY BY THE HOOKS).

2.) IN FUTURE - CHANGING LIGHT BULBS:

(A). UNHOOK TOP LINK OF CHAIN OFF CEILING BRACKET ON TWO OF THE EIGHT HANGING HOOKS.

(B). LOWER THE SHADE TO 5" FROM CEILING - THIS WILL HOLD THE SHADE SAFELY WHILE BULBS ARE CHANGED.

(C). REVERSE THE PROCESS TO RESTORE TO CLOSED POSITION.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009
 MONDAY - FRIDAY 8:00a.m - 6:00p.m ET
 visit us on the web at www.meyda.com