
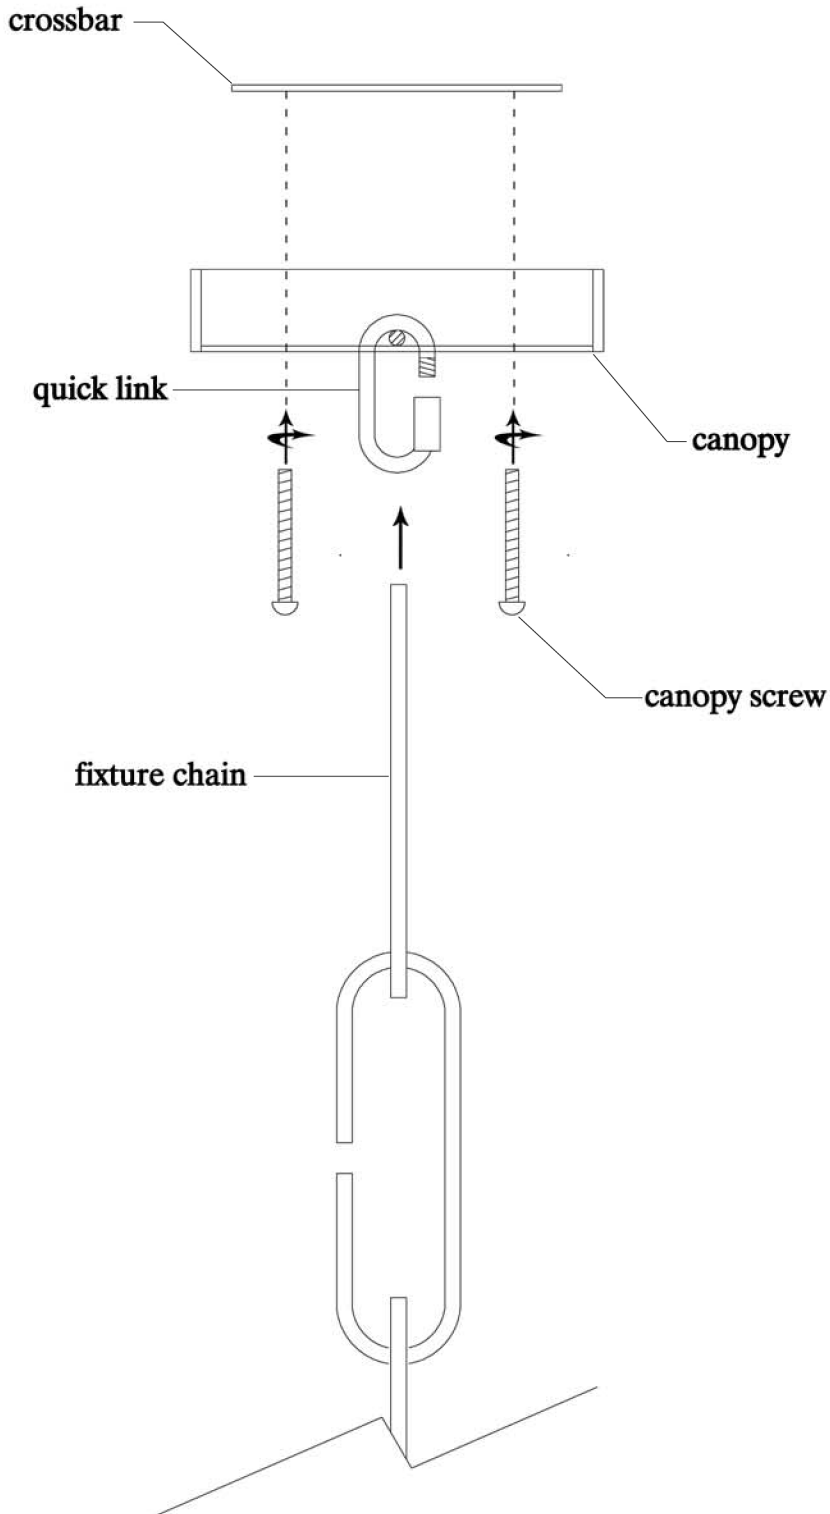


ASSEMBLY INSTRUCTIONS FOR # 138986



IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1.) Attach crossbar to j-box using customer provided screws.

2.) Attach existing fixture chain to the quick link.

You may have to open up the quick link slightly with chain pliers if the existing fixture chain does not fit initially.

3.) Feed existing electrical wires through canopy and wire as per local electrical codes.

4.) Secure canopy to crossbar with the crossbar screws provided.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com