


ASSEMBLY INSTRUCTIONS FOR 14207-13.I.TB (139520)

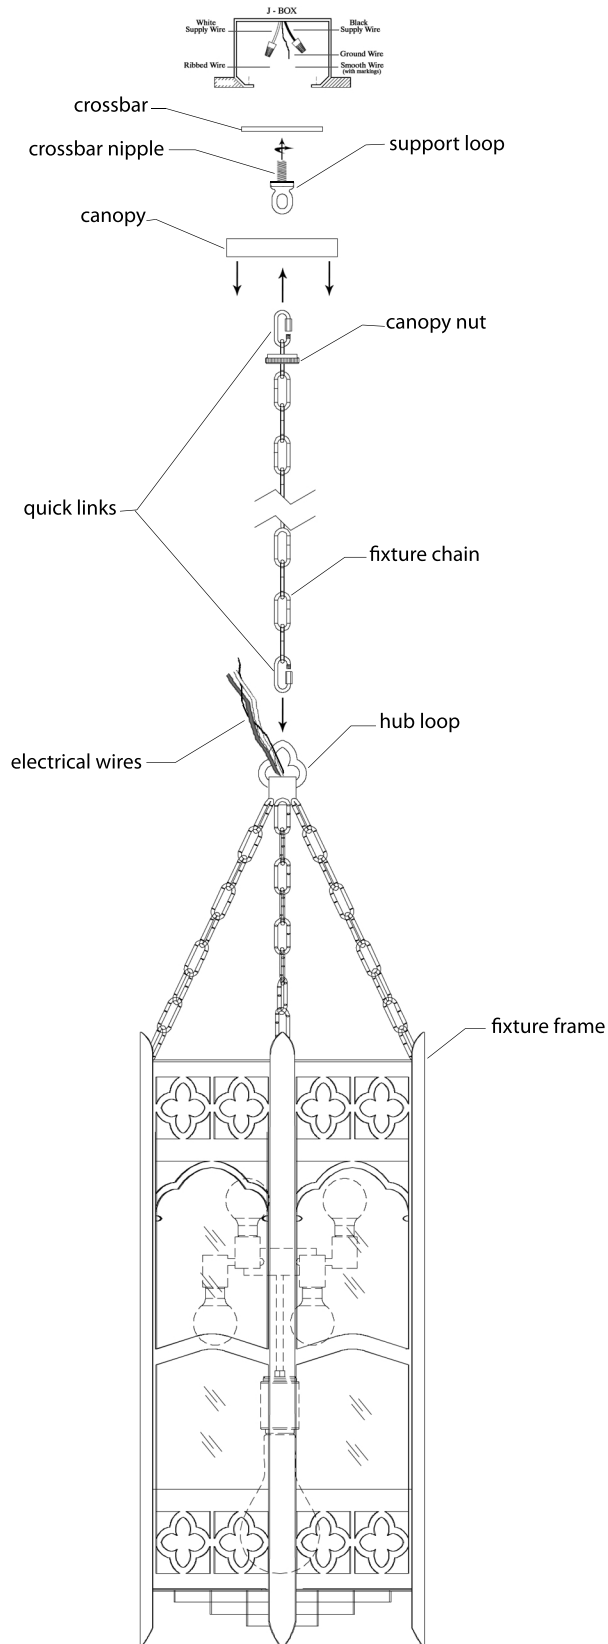

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1.) Attach screw collar with crossbar nipple to crossbar.
- 2.) Mount crossbar to a secure location.
- 3.) Attach fixture chain to hub loop using quick link.
- 4.) Place canopy nut then canopy onto fixture chain.
- 5.) Attach fixture chain to support loop.
- 6.) Thread electrical wires up fixture chain, through canopy nut, canopy, and support loop.
- 7.) Wire as per local electrical codes.
- 8.) Slide canopy up to ceiling and secure with canopy nut.

Note: Both the glass panels and the fixture frame are labeled for glass installation.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com