
ASSEMBLY INSTRUCTIONS FOR #145938

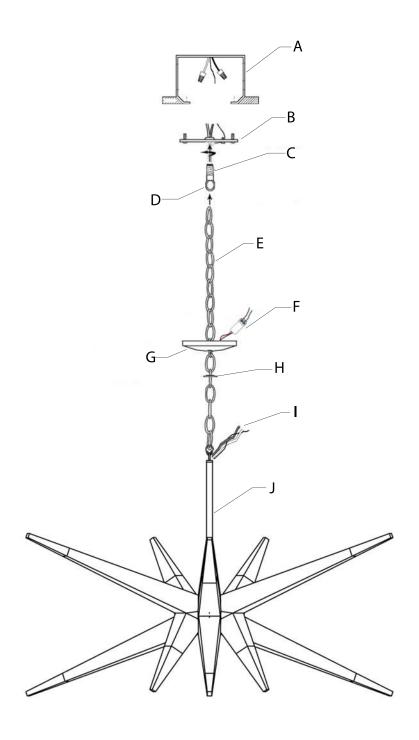

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach crossbar nipple (C) with support loop (D) to crossbar (B).
- 2.) Attach crossbar (B) to electrical box (A) using customer provided fasteners.
- 3.) Attach fixture chain (E) to loop on top of fixture frame (J).
- 4.) Place canopy nut (H) then canopy (G) onto fixture chain (E) as shown.
- 5.) Attach fixture chain (E) to support loop (D).
- 6.) Thread fixture wire (I) up fixture chain (E), through canopy nut (H) and canopy (G).
- 7.) Connect fixture wire (I) to LED driver (F) using wire nuts.
- 8.) Wire electrical wires from LED driver (F) to electrical box as per local electrical codes and place LED driver into electircal box.
- 9.) Slide canopy (G) up to ceiling, screw canopy nut (H) onto crossbar nipple (C) and tighten to canopy.



"A Commitment to Excellence in Lighting and Service"