
ASSEMBLY INSTRUCTIONS FOR #147096

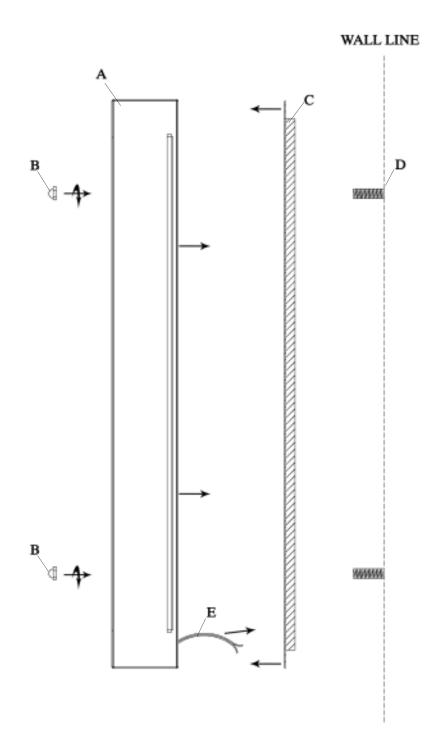

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- Place back plate (C) into front plate (A) and note where the metal plates come into contact.
- Attach foam gasket material, provided, to the front plate at these contact points.
 (To prevent any light leakage)
- Feed electrical wires (E) from front plate (A) through back plate (C) and place back plate (C) into front plate (A) as shown.
- Wire as per local electrical codes.
- Place sconce assembly onto customer provided all-thread (D) and secure with acorn nuts (B).



"A Commitment to Excellence in Lighting and Service"