


ASSEMBLY INSTRUCTIONS FOR #148835

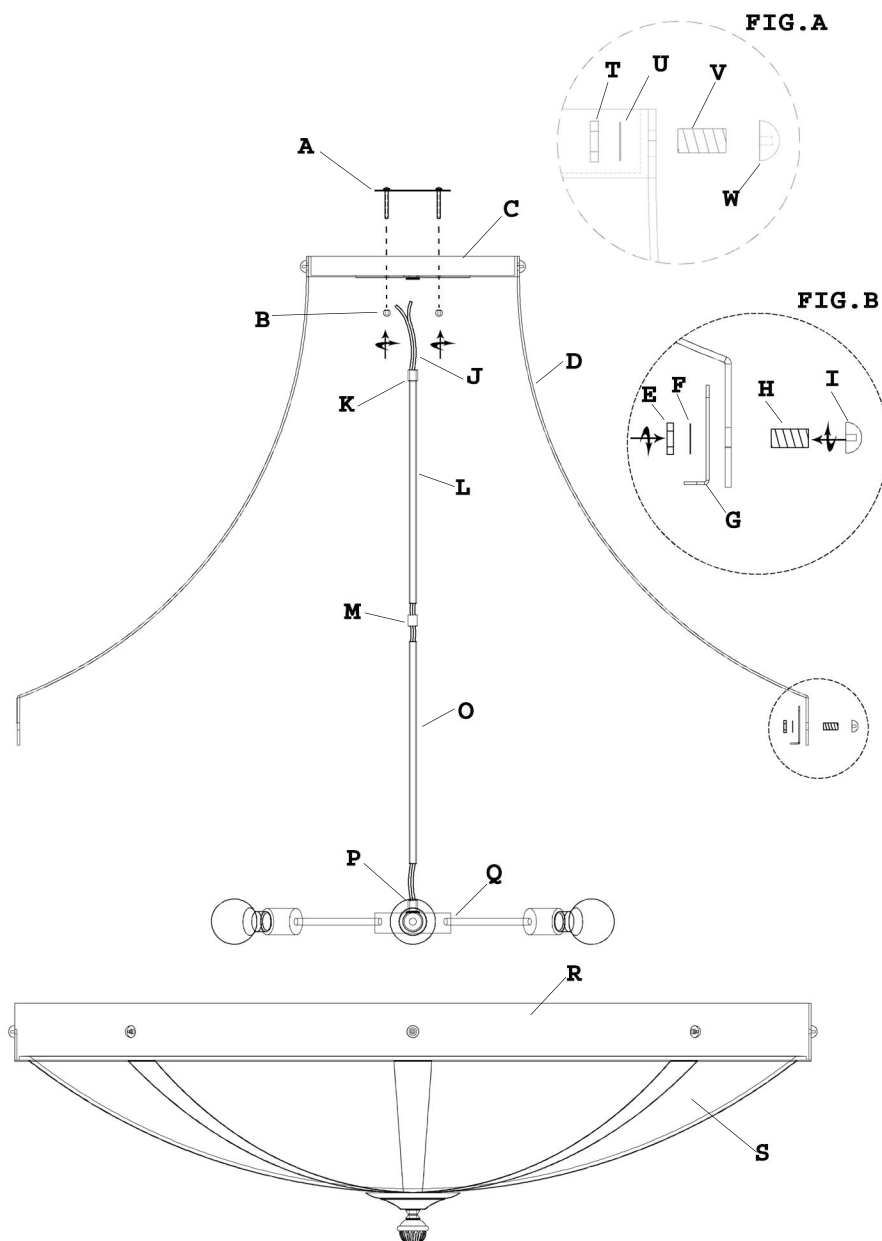

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Attach mounting plate (A) to a secure location using customer provided screws.
- 2.) Assemble down rod:
 - Screw bottom section (O) into bottom coupling (P) on light cluster (Q).
 - Use middle coupling (M) to attach bottom section (O) to top section (L).
 - Feed electrical wires (J) up through canopy (C) and use top coupling K to attached top section (L) to canopy (C).
- **Be careful not to twist electrical wires (J)**
- 3.) Attach fixture arms (D) to canopy (C):
 - Use half ball nut (W), nipple (V), washer (U), and hex nut (T) to attach all fixture arms to canopy (C) as shown in FIG.A
- 4.) Wire as per local electrical codes.
- 5.) Secure canopy (C) to mounting plate (A) using canopy nuts (B).
- 6.) Install light bulbs.
- 7.) Attach fixture arms (D) to fixture frame (R):
 - Use half ball nut (I), nipple (H), bowl clip (G), washer (F), and hex nut (E) to attach all fixture arms (D) to fixture frame (R) as shown in FIG.B
 - Bowl clips (G) will hold acrylic bowl (S) flush with fixture frame (R).



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com