

ASSEMBLY INSTRUCTIONS FOR #24264

IMPORTANT
TURN OFF THE POWER AT THE MAIN
FUSE OR CIRCUIT BREAKER BOX
BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL
PARTS BEFORE ASSEMBLY. BULBS ARE
NOT INCLUDED

Install Fixture as shown in Figure A.


*Make sure power is turned off.

Instructions for attaching Shades.

1. Install assembled fixture to ceiling using the Electrical Connections located at the bottom of page.
2. Loosen all set screws (4 Screws on each shade holder). Unscrew socket ring from sockets and remove.
3. Place shade into shade holder and tighten set screws
 Screw socket ring onto socket and tighten.
 NOTE: Some shades will not seat into shade holder with set screws. If this occurs you must use the socket ring. (Repeat step 2 using socket ring) FIG. B
 NOTE: You may have to invert the socket ring to hold the shade snug. See FIG. C. Repeat step 2.
4. Screw light bulb into socket, Enjoy!

ELECTRICAL CONNECTIONS:

1. Cut excess wire ABOVE Crossbar to 6 inches. Split the wire into 2 separate leads. Strip one inch of plastic insulator from the ends of each lead.
2. Connect the half of the wire with the ribbed surface to the white wire of the supply box. Connect the smooth half of the wire (the half with the markings) to the black wire of the supply box. Connect the bare copper Ground Wire to the green screw of the crossbar. Use UL listed wire connectors suitable for the size, type, and number of conductors. No loose strands or loose connections should be present. Secure wire connectors with electrical tape.

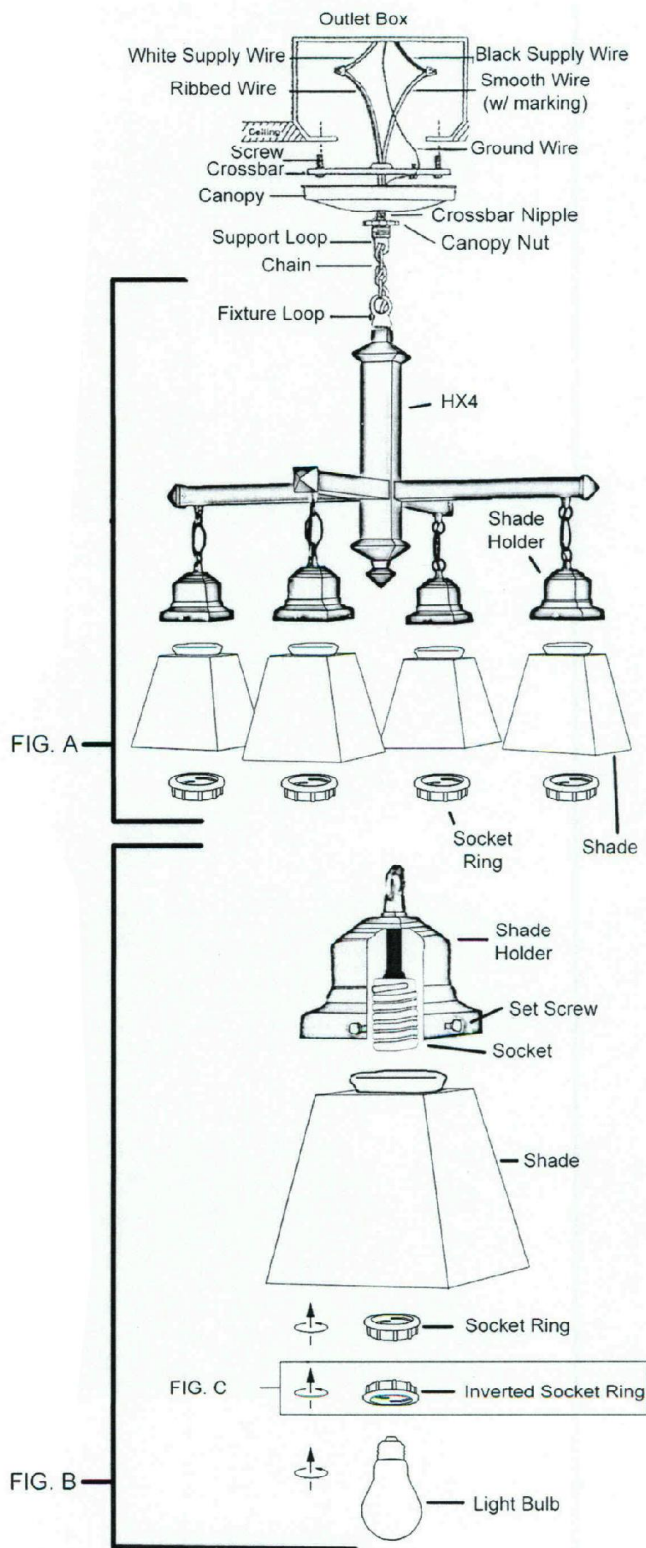

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com