

# STRUCTURAL

Design by Arik Levy.

## Reference

**2645.**

## Application

Ceiling Fixtures

## Installation type

Surface mounted

## Description

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order. Two grey finishes integrate with a room's architecture.

## Diffuser

Polycarbonate diffuser

## Materials

Body: Aluminum

Diffuser: Polycarbonate

Profile: Aluminum

## Finishes




**2645-15** Grey L2 (NCS S 2500-N)



**2645-21** Grey D1 (NCS S 7000-N)

## Sketch



## Electrical characteristics

1 x LED PLATE 24V 9W

AND

1 x LED PLATE 24V 15W

AND


1 x LED PLATE 24V 30W



Total 54.0 W



# VIBIA



**Light source:** 3000K CRI >90 6018 lm 118 lm/W

**Driver included:** CV - Constant Voltage 90-303V 50/60Hz

**Electronic dimming:** 1-10V

**Optional dimming:** DALI

## Technical characteristics

- Main input by the biggest box


## Installation and assembly

Please see the installation manual

## Light distribution

### General lighting - opaque shade

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



## Photometric data

Efficiency : 69.34 lm/W

Coordinate system : CG

Total flux : 5200.43 lm

Maximum value : 2251.45 cd


Light position : C=0.00 G=0.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

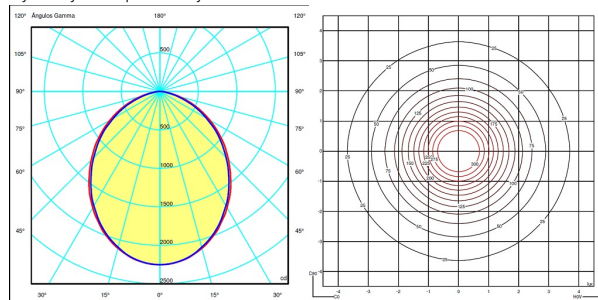

## Certificates

