


# ASSEMBLY INSTRUCTIONS FOR #139591

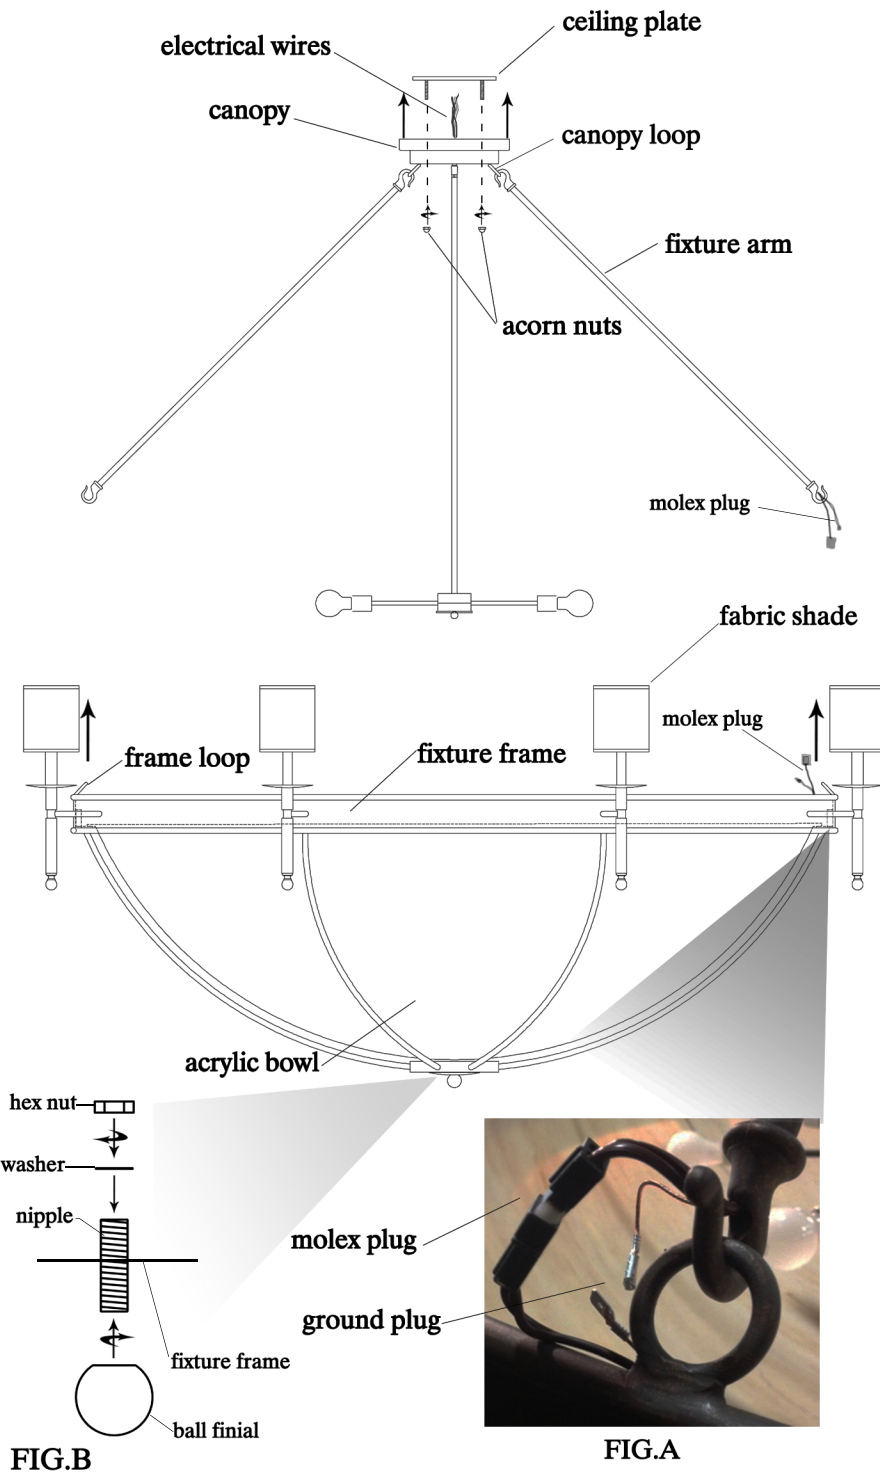

## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

**THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.**

- 1.) Mount ceiling plate to a secure location.
- 2.) Wire as per local electrical codes.
- 3.) Secure canopy to ceiling plate using acorn nuts provided.
- 4.) Attach fixture arms to canopy loops.
- 5.) Attach all four fixture arms to frame loops on fixture frame.
- 6.) Connect molex plug and ground plug from fixture arm to fixture frame. FIG.A
- 7.) Lift up acrylic bowl and attach final as shown in FIG.B
- 8.) Install bulb and attach fabric shades.

Note: There may be slight inconsistencies or striations in the acrylic due to its natural properties.



*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at [www.meyda.com](http://www.meyda.com)