
## ASSEMBLY INSTRUCTIONS FOR #121321 (1-0470233309-47)

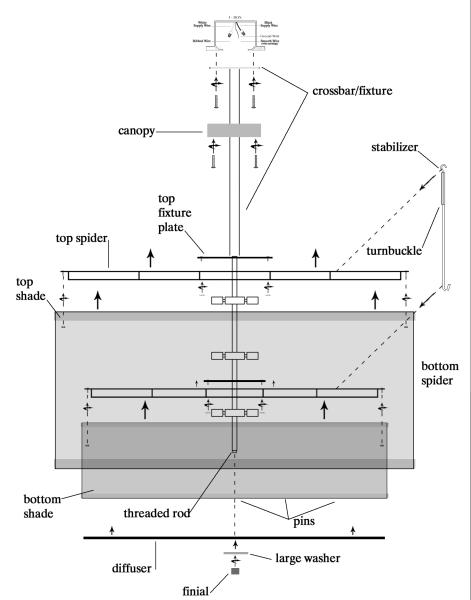

## **IMPORTANT**

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

THIS FIXTURE WEIGHS OVER 50 LBS. NEC:314.27B, A luminaire that weighs more than 23kg (50lb) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM weight to be supported.

- 1. Attach crossbar/fixture to jbox.
- 2. Wire as per local electrical code.
- 3. Slide canopy up to ceiling and attach to crossbar.
- 4. Place top spider up and attach to top fixture plate.
- 5. Place top shade up and attach to top spider.
- 6. Place light bulbs into top two socket clusters.
- 7. Place bottom spider up and attach to bottom fixture plate.
- 8. Attach stabilizer onto top spider and bottom spider. Use turnbuckle to adjust stabilizer up or down to keep top and bottom spider level.
- 9. Place bottom shade up and attach to bottom spider.
- 10. Place light bulbs into bottom socket cluster.
- 11. Place diffuser up and onto pins located on bottom edge of bottom shade (to hold edge of diffuser up). Place large washer and finial onto threaded rod, tighten finial.



"A Commitment to Excellence in Lighting and Service"